

# EKKO

MATERIAL HANDLING EQUIPMENT

**MOVING AHEAD**

## Scissor Lift

### Lithium Aerial Platform

**ES40E-LI / ES60E-LI / ES80E-LI /  
ES100E-LI / ES120E-LI**

- Load Capacity 500-990 lbs.
- Raised Height 157.5"(13.1')-468"(39')
- Lowered Height 77"-102.36"
- Steel Construction
- GB25849 and EN280 Compliance
- Max Workers - 2
- Ground Clearance .59"-2.36"
- Steel Construction
- Guardrail Height 43.3"
- Batteries & Charger
- 3 Years limited warranty



[www.ekkolifts.com](http://www.ekkolifts.com)

## ES40E-LI / ES60E-LI / ES80E-LI / ES100E-LI / ES120E-LI

Compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely.

**WEIGHT CAPACITY:** 500-990 lbs.

**RAISED HEIGHT:** 157.5"(13.1')-468"(39')

**MAX NUMBER OF WORKERS:** 2/1(indoor/outdoor)

**MAX WORKING HEIGHT:** 236.2"(19.7')-547.2"(45.6')

**LOWERED HEIGHT:** 77"-102.36"

**GUARDRAIL HEIGHT:** 43.3"

**PLATFORM EXTENSION SIZE:** 35.43"-39.37"

**GROUND CLEARANCE (CLOSED):** 2.36"-3.74"

**GROUND CLEARANCE (LIFTED):** .59"-.78"

**PLATFORM EXTENSION SIZE:** 35.43"-39.37"

**BATTERY:** 25.6V/75AH-25.6V/230AH Lithium

**CHARGER:** 25.6V/15A-25.6V/36A direct connect plug in.

**BRAKING:** Double rear wheels braking


**DRIVING SPEED(FOLDING STATE):** 0-2.5 MPH

**DRIVING SPEED(LIFTED STATE):** 0-.5 MPH

**RISE/FALL TIME:** 18s/28s – 52s/52s



# SCISSOR LIFT

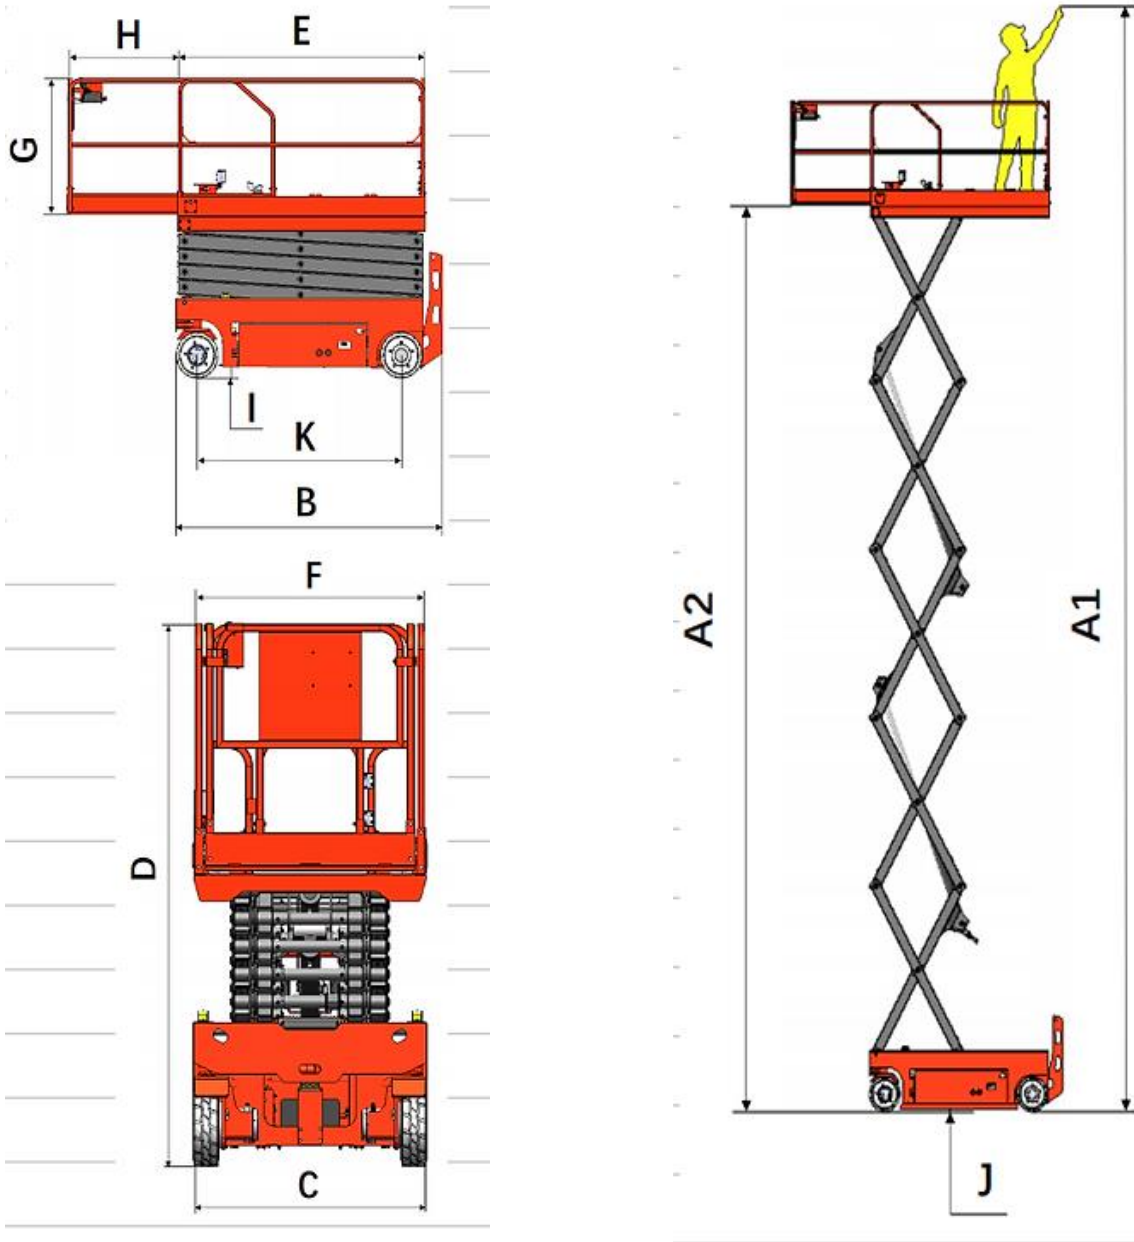

MODEL #	LOWERED HEIGHT	RAISED HEIGHT	PLATFORM SIZE	CAPACITY	SERVICE WEIGHT
ES40E-LI	77"	13.1'(157.5")	50.4"X29.1"	500 lbs.	2250 lbs.
ES60E-LI	86"	19'(228")	65"X30"	500 lbs.	3356 lbs.
ES80E-LI	90.6"	26.25'(315")	89"X45"	990 lbs.	5512 lbs.
ES100E-LI	96.85"	32.8'(394")	89"X45"	700 lbs.	6304 lbs.
ES120E-LI	102.36"	39'(468")	89"X45"	700 lbs.	6590 lbs.