

## WALKIE REACH TRUCK EH15T SERIES





## EH15T SERIES

## Superior quality, maneuverable, compact, and durable for all your material handling applications. Ideal for small aisles and areas.

WEIGHT CAPACITY: 3300 lbs. @ 24" load center

**LIFT HEIGHT:** 138" or 216" (11.5 ft. or 18 ft)

**FORK LENGTH: 42"** 

MAST HEIGHT: 93.3" or 97.3"

**TURNING RADIUS: 67"** 

**TILT:** 2/5 degree

**EXTENDED REACH: 19.7"** FREE LIFTING HEIGHT: 68"

INTEGRAL BATTERY / CHARGER: 24V 270-400AH, 24-volt Industrial batteries with external direct connect 110A 110VAC plug-in automatic 24V/40-50A

charger (both Included)

**BRAKING:** Electromagnetic Brakes

SPEED TRAVEL: 3.7 mph empty; 3.5 mph loaded

LIFTING SPEED: 5.1 ips empty; 4 ips loaded

LOWERING SPEED: 4.7 ips empty; 5.3 ips loaded

DRIVE WHEELS: 8.25" x 2.5" cushion

**LOAD WHEELS:** (2) 8.25" x 2.5" cushion

**HYDRAULICS LIFTING MOTOR:** 24V 3000 Watt lifting motor with hardened chrome moly steel for durability.

**DRIVE MOTOR:** 24V 2500 Watt AC drive motor for efficiency and high torque.

STEERING MOTOR: EPS (Electronic Power Steering) 24V 200 Watt

AC CONTROLLER: 24V CURTIS Instrument provides performance through entire range of speed; Constant travel speed regardless of load; Battery discharge indicator combination gauge.

**BRAKES:** Electro-magnetic braking for secure stopping power; Electronic neutral braking for accurate control.


**OPERATOR CONTROLS:** EPS (Electric Power Steering), tilt lifting, lowering, horn functions are located in the ergonomic handle; Belly button reverse safety feature allows the unit to stop and reverse to avoid collision or injury.

CHASSIS AND MAST: Robotic Welding; Heavy duty steel chassis with I-beam mast for durability; Telescoping mast.



## Walkie Reach Truck



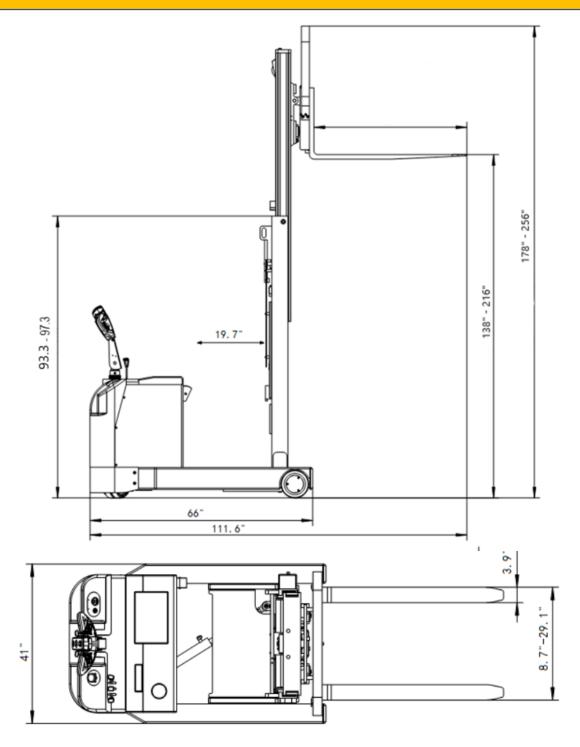

MODEL#	MAST	LIFT HEIGHT	MAX MAST HEIGHT	TOTAL LENGTH	SERVICE WEIGHT
EH15T	93.3"	138"	178"	111.6"	4200
EH15TH	97.3	216"	256"	111.6"	4915

