



**MATERIAL HANDLING EQUIPMENT**

**MOVING  
AHEAD**

**CATALOG**



**[WWW.EKKOLIFTS.COM](http://WWW.EKKOLIFTS.COM)**

# Table of Contents

Description	Page
About Us	1
Diesel Forklifts	2
LPG Forklifts	7
Electric Forklifts – Lead acid	20
Electric Forklifts – Lithium	27
Reach Trucks	
Order Picker	
Counterbalance Stackers	
Straddle Stacker	
Pallet Jacks	
Tow Tractor	
Scissor Lift	
Table Lift	

# About Us

Since 2008, EKKO Material Handling Equipment Manufacturing Inc. has established itself as the go-to manufacturer for OEM and ODM channels. Through our extensive experience, innovative manufacturing capabilities, and international collaborations, we have built a reputation for delivering high-quality forklifts, pallet trucks, walkie pallet trucks, walkie rider pallet trucks, stackers, walkie stackers, reach trucks, and a wide range of material handling equipment.

Our commitment to excellence is backed by rigorous research and development, stringent quality control, and comprehensive quality assurance. Every EKKO product meets CE certification standards and adheres to international safety regulations, supported by ISO9001 certification. Additionally, we maintain self-managed import and export rights across North and South America, Europe, Australia, and Asia.

We proudly welcome OEM and ODM collaborations and offer the flexibility to produce non-standard equipment tailored to customers' specifications and requirements. Guided by our operating philosophy of "Services Create Enterprise Value," EKKO is dedicated to providing top-tier quality and professional after-sales support.

- **Superior Quality**
- **Reliability**
- **Versatility**
- **Advanced Engineering**
- **Competitive Pricing**
- **ISO Certified**
- **CE Certified**
- **Superior Support**
- **3 Year Limited Warranty**




## EK30LP LPG Forklift

Model		EK30LP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	6000
Load center distance	(in)	24
Wheelbase	(in)	69
Lifting height	(in)	189
Free lifting height	(in)	40.9
Lowered mast height	(in)	89.4
Mast/Fork carriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	150.3
Overall width	(in)	48.2
Tire Material		Solid Pneumatic Tires
Fork Size	(in)	42.1x4.92x1.77
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.53
Max traveling speed (load/unload)	Mph	11.8/11.8
Backrest Height (from surface of the forks)	(in)	46.54
Battery	(V/A)	12/80
Engine		Kubota WG2503
Engine Rated Power	HP/rp m	LPG: 58.3/2600
Service Weight	(lb.)	10320 lb.

The EKKO EK30LP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Kubota engine and competitive pricing.

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls

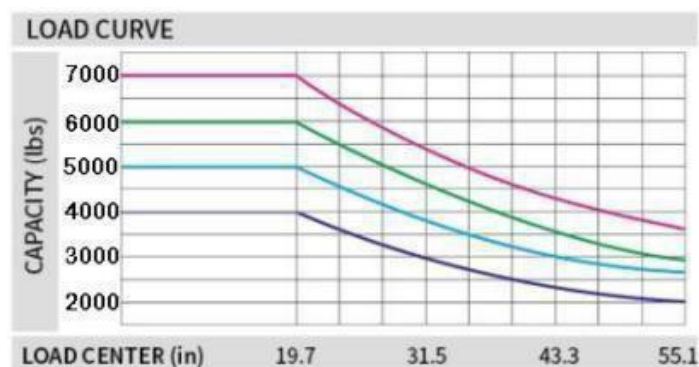




## EK35LP LPG Forklift

Model		EK35LP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	7000
Load center distance	(in)	24
Wheelbase	(in)	68.9
Lifting height	(in)	189
Free lifting height	(in)	42.9
Lowered mast height	(in)	89.4
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	150.4
Overall width	(in)	48.2
Tire Material		Solid Pneumatic Tires
Fork Size	(in)	42.1x4.9x1.97
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	5.3
Max traveling speed (load/unload)	Mph	11.8/11.8
Backrest Height (from surface of the forks)	(in)	46.3
Battery	(V/A)	12/80
Engine		Kubota WG2503
Engine Rated Power	HP/rp m	LPG: 60.1/2400
Service Weight	(lb.)	10605 lb.

The EKKO EK35LP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Kubota engine and competitive pricing.

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls

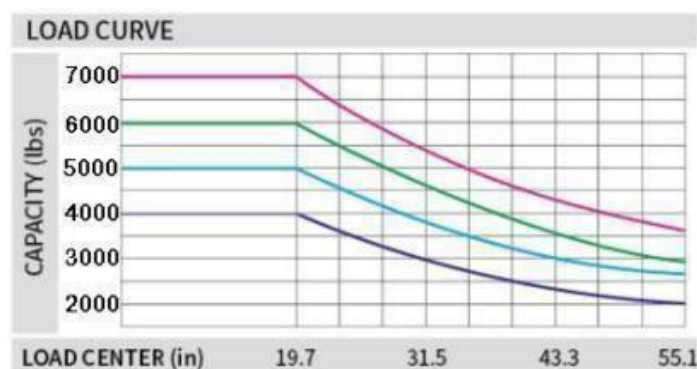


## EK50LP LPG Forklift

Model		EK50LP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	10,000
Load center distance	(in)	24
Wheelbase	(in)	61.8
Lifting height	(in)	185
Free lifting height	(in)	44.3
Lowered mast height	(in)	91.9
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	157
Overall width	(in)	55.9
Tire Material		Pattern Cushion Tire
Fork Size	(in)	48x5.9x1.97
Service Brake		Hydraulic Foot Pedal
Min Ground Clearance	In	4.3
Max traveling speed (load/unload)	Mph	10.5/11.2
Backrest Height (from surface of the forks)	(in)	47.6
Parking Brake		Hand Lever
Engine		Kubota WG3800
Engine Rated Power	HP/rp m	LPG: 63.2
Service Weight	(lb.)	16,250 lb.

The EKKO EK50LP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Kubota engine and competitive pricing.

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls

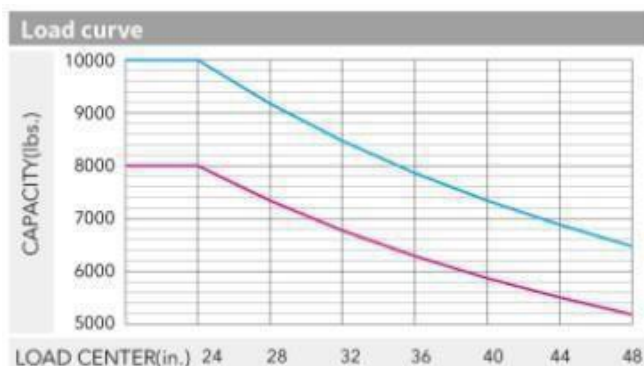

## EK25CLP LPG Forklift

Model		EK25CLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	58
Lifting height	(in)	189
Free lifting height	(in)	44
Lowered mast height	(in)	85
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	136.8
Overall width	(in)	42
Tire Material		Smooth Cushion Tires
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	3.5
Max traveling speed (load/unload)	Mph	10.8/10.8
Backrest Height (from surface of the forks)	(in)	40
Battery	(V/A)	12/60
Engine		Mitsubishi 4G64 (PSI Engine)
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	9370 lb.

The EKKO EK25CLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Mitsubishi engine and competitive pricing

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls

The EK25CLP Features smooth Cushion Tires that are perfect for use indoors on a smooth flat surface



## EK25SLP LPG Forklift

Model		EK25SLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	58
Lifting height	(in)	189
Free lifting height	(in)	44
Lowered mast height	(in)	85
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	136.8
Overall width	(in)	42
Tire Material		Pattern Cushion Tires
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	3.5
Max traveling speed (load/unload)	Mph	10.8/10.8
Backrest Height (from surface of the forks)	(in)	40
Battery	(V/A)	12/60
Engine		Mitsubishi 4G64 (PSI Engine)
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	9370 lb.

The EK25SLP Features Pattern Cushion Tires to help prevent slipping on slick flooring.



The EKKO EK25SLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Mitsubishi engine and competitive pricing.

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls





## EK30SLP LPG Forklift

Model		EK30SLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	6000
Load center distance	(in)	24
Wheelbase	(in)	58
Lifting height	(in)	189
Free lifting height	(in)	44
Lowered mast height	(in)	88
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	140
Overall width	(in)	44
Tire Material		Pattern Cushion Tires
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	3.5
Max traveling speed (load/unload)	Mph	10.8/10.8
Backrest Height (from surface of the forks)	(in)	48
Battery	(V/A)	12/60
Engine		Mitsubishi 4G64 (PSI Engine)
Engine Rated Power	HP/rp m	LPG: 64/2700
Service Weight	(lb.)	10785 lb.

The EKKO EK30SLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the Mitsubishi engine and competitive pricing

- Multifunction instrument panel - motoring for Safety and efficient operation.
- Operator compartment- nonslip entrance step, wider access & leg room. Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Adjustable steering column limiting operator arm and shoulder fatigue.
- Excellent Operator visibility.
- Integral Heavy-Duty Chassis- ensuring driver protection
- Steer axle pivots to 80 degrees for tighter turning radius.
- Hydraulic controls

The EK30SLP Features Pattern Cushion Tires to help prevent slipping on slick flooring.




## EK20TLP LPG Forklift

Model		EK20TLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	62.9
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	141.8
Overall width	(in)	45.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.3
Max traveling speed (load/unload)	Mph	10.6/11.8
Overall Height, forks raised	(in)	225
Battery	(V/A)	12/60
Engine		PSI 2.4
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	7716 lb.

The EKKOEK20TLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the PSI 2.4I engine or KUBOTA WG2503 engine and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Semi-suspension seat, and small steering wheel, electro-hydraulic direction changing, and automobile type double combined switch effectively improve driving comfort level.
- Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Optimized hydraulic system, the truck is more energy-efficient and has lower fuel consumption.
- The engine satisfies the CARB 4 regulation.

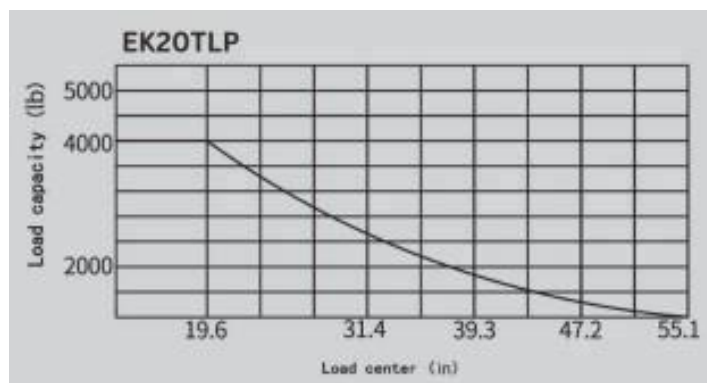




## EK25TLP LPG Forklift

Model		EK25TLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	62.9
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	144.6
Overall width	(in)	45.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.3
Max traveling speed (load/unload)	Mph	10.6/11.8
Overall Height, forks raised	(in)	225
Battery	(V/A)	12/60
Engine		PSI 2.4
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	8465 lb.

The EKKO EK25TLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the PSI 2.4l engine or KUBOTA WG2503 engine and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Semi-suspension seat, and small steering wheel, electro-hydraulic direction changing, and automobile type double combined switch effectively improve driving comfort level.
- Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Optimized hydraulic system, the truck is more energy-efficient and has lower fuel consumption.
- The engine satisfies the CARB 4 regulation.

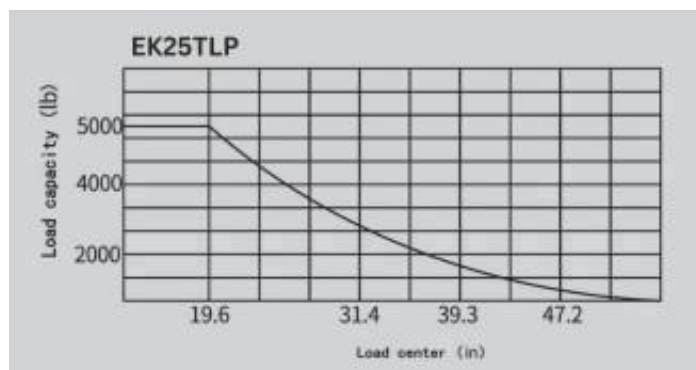


## EK30TLP LPG Forklift

Model		EK30TLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	6000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	151
Overall width	(in)	48.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	11/12.1
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/60
Engine		PSI 2.4
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	10,108 lb.

The EKKO EK30TLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the PSI 2.4l engine or KUBOTA WG2503 engine and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Semi-suspension seat, and small steering wheel, electro-hydraulic direction changing, and automobile type double combined switch effectively improve driving comfort level.
- Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Optimized hydraulic system, the truck is more energy-efficient and has lower fuel consumption.
- The engine satisfies the CARB 4 regulation.

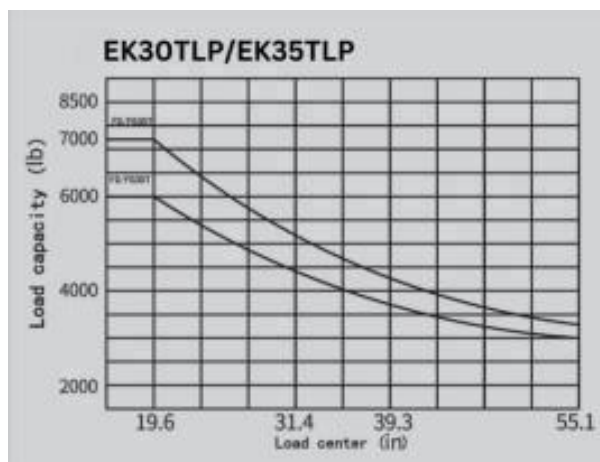


## EK35TLP LPG Forklift

Model		EK35TLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	7000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	153
Overall width	(in)	50.5
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	11/12.1
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/60
Engine		PSI 2.4
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	10,967 lb.

The EKKO EK355TLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the PSI 2.4l engine or KUBOTA WG2503 engine and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Semi-suspension seat, and small steering wheel, electro-hydraulic direction changing, and automobile type double combined switch effectively improve driving comfort level.
- Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Optimized hydraulic system, the truck is more energy-efficient and has lower fuel consumption.
- The engine satisfies the CARB 4 regulation.

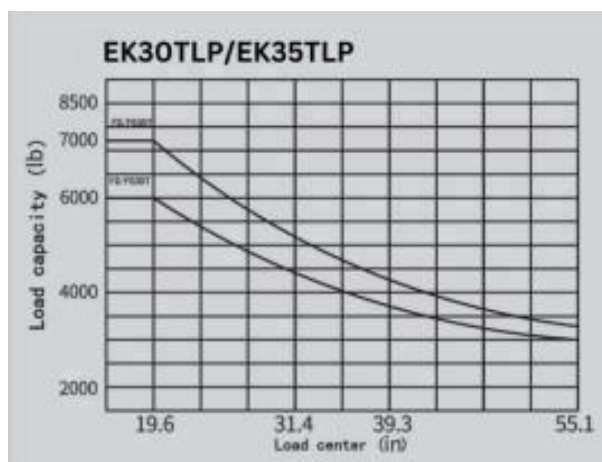


## EK40TLP LPG Forklift

Model		EK40TLP
Lift		Propane
Drive		Sit-Down
Load capacity	(lb.)	8500
Load center distance	(in)	24
Wheelbase	(in)	70.8
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	157
Overall width	(in)	52.9
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	10.3/11.2
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/60
Engine		PSI 2.4
Engine Rated Power	HP/rp m	LPG: 63/2700
Service Weight	(lb.)	11,519 lb.

The EKKO EK40TLP Liquid Propane 4 Wheel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with the PSI 2.4l engine or KUBOTA WG2503 engine and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Semi-suspension seat, and small steering wheel, electro-hydraulic direction changing, and automobile type double combined switch effectively improve driving comfort level.
- Cushion connection and whole suspension cab can absorb the vibrations of truck effectively.
- Optimized hydraulic system, the truck is more energy-efficient and has lower fuel consumption.
- The engine satisfies the CARB 4 regulation.

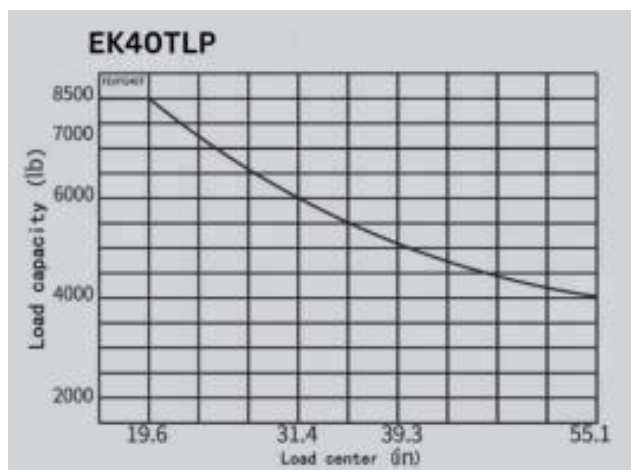




## EK20D Diesel Forklift

Model		EK20D
Lift		Diesel
Drive		Sit-Down
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	62.9
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	141.8
Overall width	(in)	45.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.3
Max traveling speed (load/unload)	Mph	10.6/11.8
Overall Height, forks raised	(in)	225
Battery	(V/A)	12/80
Engine		Mitsubishi 4EG or Kubota V2403
Engine Rated Power	HP/rp m	Diesel 49/2250
Service Weight	(lb.)	7716 lb.

The EKKO EK20D Diesel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with a Mitsubishi 4EG or Kubota V2403 and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Multifunctional suspended seat increases the support of the driver, and reduce vibration, and balancing the weight of the driver.
- Steering wheel adjusting mechanism is disposed in the appropriate position making it easily adjustable.
- By using an impedance composited muffler, this truck reduces the level of sound output.

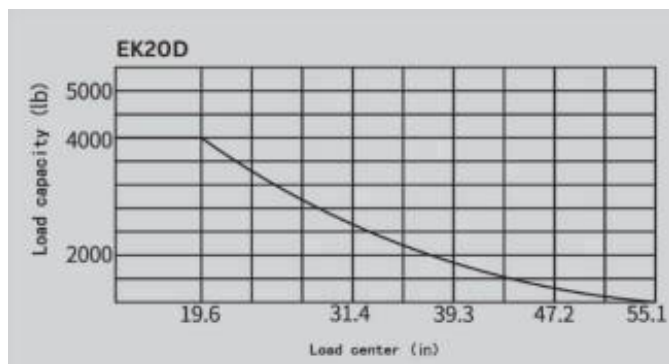


## EK25D Diesel Forklift

Model		EK25D
Lift		Diesel
Drive		Sit-Down
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	62.9
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	144.6
Overall width	(in)	45.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.3
Max traveling speed (load/unload)	Mph	10.6/11.8
Overall Height, forks raised	(in)	225
Battery	(V/A)	12/80
Engine		Mitsubishi 4EG or Kubota V2403
Engine Rated Power	HP/rp m	Diesel 49/2250
Service Weight	(lb.)	8465 lb.

The EKKO EK25D Diesel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with a Mitsubishi 4EG or Kubota V2403 and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Multifunctional suspended seat increases the support of the driver, and reduce vibration, and balancing the weight of the driver.
- Steering wheel adjusting mechanism is disposed in the appropriate position making it easily adjustable.
- By using an impedance composited muffler, this truck reduces the level of sound output.

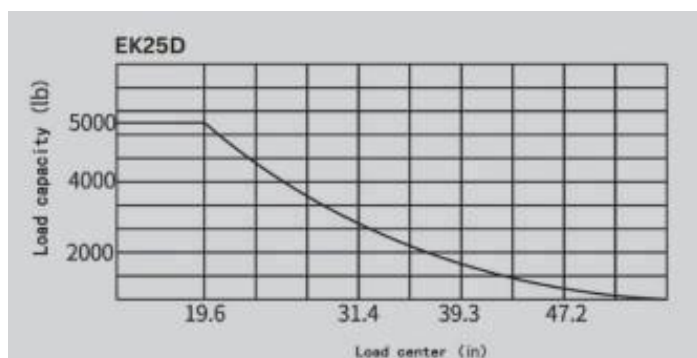




## EK30D Diesel Forklift

Model		EK30D
Lift		Diesel
Drive		Sit-Down
Load capacity	(lb.)	6000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	151
Overall width	(in)	48.2
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	11/12.1
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/80
Engine		Mitsubishi 4EG or Kubota V2403
Engine Rated Power	HP/rp m	Diesel 49/2250
Service Weight	(lb.)	10,108 lb.

The EKKO EK30D Diesel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with a Mitsubishi 4EG or Kubota V2403 and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Multifunctional suspended seat increases the support of the driver, and reduce vibration, and balancing the weight of the driver.
- Steering wheel adjusting mechanism is disposed in the appropriate position making it easily adjustable.
- By using an impedance composited muffler, this truck reduces the level of sound output.

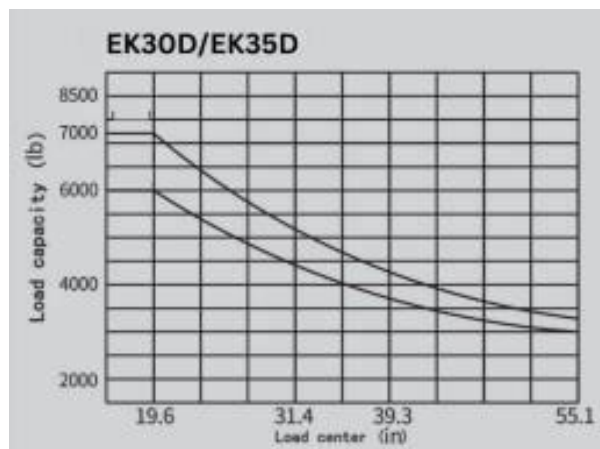


# EK35D Diesel Forklift

Model		EK35D
Lift		DIESEL
Drive		Sit-Down
Load capacity	(lb.)	7000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Forkcarriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	153
Overall width	(in)	50.5
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	11/12.1
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/80
Engine		Mitsubishi 4EG or Kubota V2403
Engine Rated Power	HP/rp m	Diesel 49/2250
Service Weight	(lb.)	10,967 lb.

The EKKO EK35D Diesel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with a Mitsubishi 4EG or Kubota V2403 and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using large arc shape of the overhead guard's front leg.
- Multifunctional suspended seat increases the support of the driver, and reduce vibration, and balancing the weight of the driver.
- Steering wheel adjusting mechanism is disposed in the appropriate position making it easily adjustable.
- By using an impedance composited muffler, this truck reduces the level of sound output.

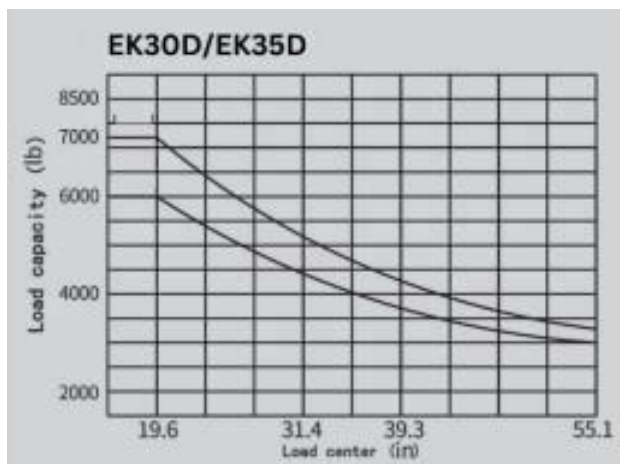


## EK40D Diesel Forklift

Model		EK40D
Lift		Diesel
Drive		Sit-Down
Load capacity	(lb.)	8500
Load center distance	(in)	24
Wheelbase	(in)	70.8
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Fork carriage tilt forward/backward	( ° )	3/6
Side Shift		Cascade
Overall length	(in)	157
Overall width	(in)	52.9
Tire Material	(in)	Solid Pneumatic Tire
Fork Size	(in)	42.1x4.8x1.5
Service Brake		Hydraulic Floor Pedal
Min Ground Clearance	In	4.7
Max traveling speed (load/unload)	Mph	10.3/11.2
Overall Height, forks raised	(in)	234
Battery	(V/A)	12/80
Engine		Mitsubishi 4EG or Kubota V2403
Engine Rated Power	HP/rp m	Diesel 49/2250
Service Weight	(lb.)	11,519 lb.

The EKKO EK40D Diesel Forklift is designed to be used for all your material handling demands, warehousing, and distribution.

This unit is manufactured with high durable quality, Tier 4 EPA compliant with a Mitsubishi 4EG or Kubota V2403 and competitive pricing.

- Features Cascade Side Shift and Shimadzu 4-Way Valve
- The operation space is enlarged and heightened overhead guard and using larger shape of the overhead guard's front leg.
- Multifunctional suspended seat increases the support of the driver, and reduce vibration, and balancing the weight of the driver.
- Steering wheel adjusting mechanism is disposed in the appropriate position making it easily adjustable.
- By using an impedance composited muffler, this truck reduces the level of sound output.

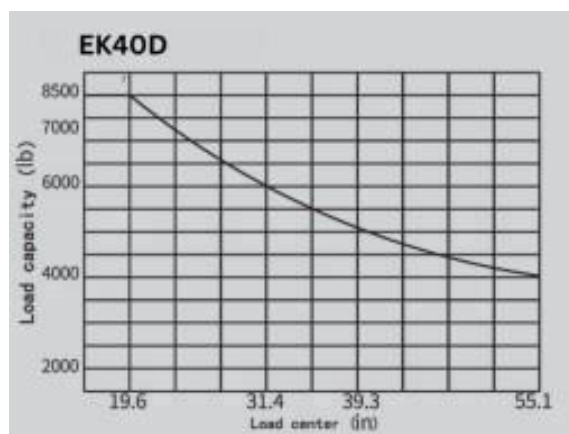


## EK16A-138 3 Wheel Electric Forklift

Model		EK16A-138
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3500
Load center distance	(in)	24
Wheelbase	(in)	49.2
Lifting height	(in)	138
Free lifting height	(in)	4
Lowered mast height	(in)	86.6
Mast/Fork carriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	107.1
Overall width	(in)	42.1
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.7-29
Turning radius	(in)	53
Max gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	4/5.5
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/50A
Driving Motor	(KW)	AC 2.2
Lifting Motor	(KW)	3.3
Battery voltage	(V/Ah)	24V/320
Service Weight	(lb.)	5020

The EKKO EK16A-138 3 Wheel Electric Forklift is designed for use for small aisles, limited spaces, and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3500 Lbs.
- Raised Height 138" (11.5ft)
- Side Shift
- Free Lift 4"
- EPS (Electric Power Steering)
- 24V AC Drive Motor
- Solid Wheels
- Battery 24V/320AH
- Charger 24V/50A

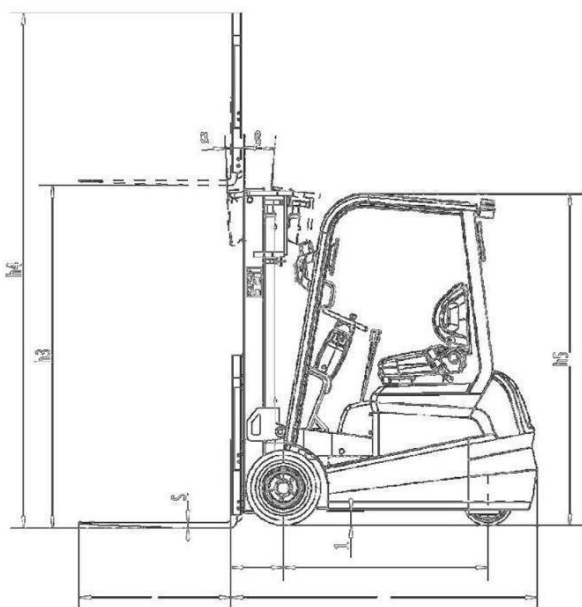




## EK16A-177 3 Wheel Electric

Model		EK16A-177
Lift		Electric
Drive		Electric
Load capacity	Q(lb.)	3500
Load center distance	C(in)	24
Wheelbase	(in)	49.2
Lifting height	(in)	177
Free lifting height	(in)	29.5
Lowered mast height	(in)	79.9
Mast/Fork carriage tilt forward/backward	( ° )	2/4
Side Shift		3-way valve
Overall length	(in)	107.1
Overall width	(in)	42.1
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.7-29
Turning radius	(in)	58.9
Max gradient performance, laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	4.71/10.2
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/50A
Driving Motor	(KW)	AC 2.2
Lifting Motor	(KW)	3.3
Battery voltage	(V/Ah)	24V/320Ah
Service Weight	(lb.)	5200

The EKKO EK16A-177 3 Wheel Electric Forklift is designed for use for small aisles, limited spaces, and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3500 Lbs.
- Raised Height 177" (14.75ft)
- Side Shift
- Free Lift 29.5"
- HPS (Hydraulic Power Steering)
- 24V AC Drive Motor
- Solid Wheels
- Battery 24V/320AH
- Charger 24V/50A

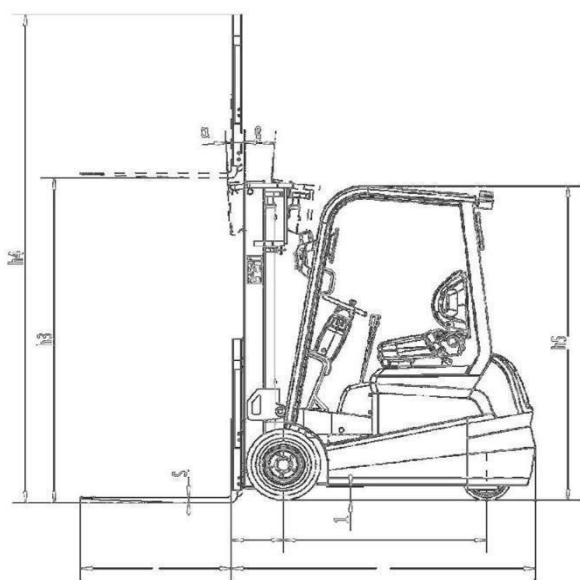



## EK16A-189LI Lithium Powered Forklift

Model		EK16A-189LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3500
Load center distance	(in)	24
Wheelbase	(in)	49.2
Lifting height	(in)	189
Free lifting height	(in)	31.5
Lowered mast height	(in)	81.3
Mast/Fork carriage tilt forward/backward	( ° )	3/6
Side Shift		3-way valve
Overall length	(in)	65
Overall width	(in)	42.1
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	65.9
Max Gradient Performance (laden/unladen)	(%)	22/30
Ground clearance at mast	(in)	3.5
Service Brake		Hydraulic foot Pedal
Controller		ZAPI
Charger	(V/A)	24V/50A
Battery, Lithium	(V/A)	24V/200Ah
Service Weight	(lb.)	4650

The EKKO EK16A-189LI 3 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3500 Lbs.
- Raised Height 189" (15.75ft)
- Free Lift 31.5"
- ZAPI Controller
- Hydraulic Power Steering
- Cushion Tires
- Lithium Battery 24V/200Ah
- 24V/50A Charger

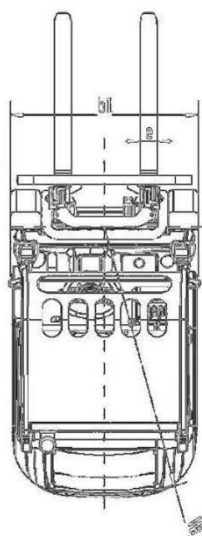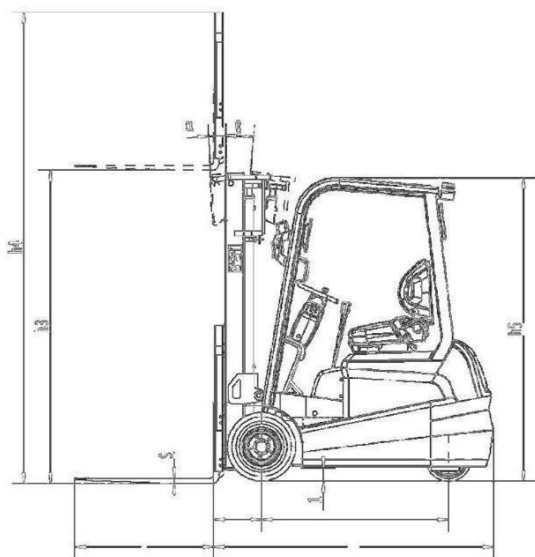




## EK18AT-185LI Lithium Powered Forklift

Model		EK18AT-185LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	55.1
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	95.5
Mast/Fork carriage tilt forward/backward	( ° )	3/5
Side Shift		3-way valve
Overall length	(in)	116.9
Overall width	(in)	44.1
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	65.9
Max Gradient Performance (laden/unladen)	(%)	22/30
Ground clearance at mast	(in)	3.5
Service Brake		Hydraulic foot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	48V/202Ah
Service Weight	(lb.)	7341

The EKKO EK18AT-185LI 3 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 43.7"
- INMOTION Controller
- Cushion Tires
- Blue Light
- Battery 48V/202Ah Lithium
- Charger 48V/100A (optional 220V & 110V)

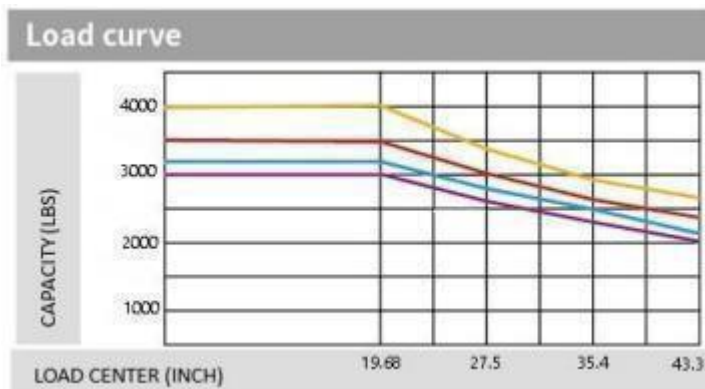

## EK18AT-212LI Lithium Powered Forklift

Model		EK18AT-212LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	23.6
Wheelbase	(in)	42.91
Lifting height	(in)	212
Free lifting height	(in)	54.6
Lowered mast height	(in)	83.54
Mast/Fork carriage tilt forward/backward	( ° )	2/5
Side Shift		3-way valve
Overall length	(in)	111.1
Overall width	(in)	36.1
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	53.07
Max Gradient Performance (laden/unladen)	(%)	6/10
Ground clearance at mast	(in)	3.54
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	48V/100A
Battery, Lithium	(V/A)	48V/202Ah
Service Weight	(lb.)	7550

The EKKO EK18AT-212LI 3 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 Lbs.
- Raised Height 212" (17.67ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 54.6"
- INMOTION Controller
- Cushion Tires
- Blue Light
- Battery 48V/202Ah Lithium
- Charger 48V/100A (optional 220V &




# EK20GS Electric Forklift

Model		EK20GS
Lift		Electric
Drive		Sit-Down
Load capacity	(lb.)	4500
Load center distance	(in)	20
Wheelbase	(in)	65.4
Lifting height	(in)	189
Free lifting height	(in)	47.48
Lowered mast height	(in)	79
Mast/Forkcarriage tilt forward/backward	( ° )	6/6
Side Shift		3-way valve
Overall length	(in)	133
Overall width	(in)	46.45
Fork size,	(in)	42
Min Ground Clearance	(in)	3.95
Turning radius	(in)	85
Traveling Speed (laden/unladen)	MPH	9/9..3
Lift speed, laden/unladen	(in/s)	17.3/11.4
Service Brake		Hydraulic Foot Pedal
Charger	(	3 PHASE 480V
Battery voltage	(V/Ah)	48V/600Ah Lead Acid
Service Weight	(lb.)	9232 lb.

The EKKO EK20GS 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4500 lb.
- Raised Height 189" (15.75ft)
- Side Shift
- Solid Pneumatic Tires
- ZAPI Controller
- Battery 48/600 AH Lead acid
- 3-Phase 480V Charger (optional 220V)

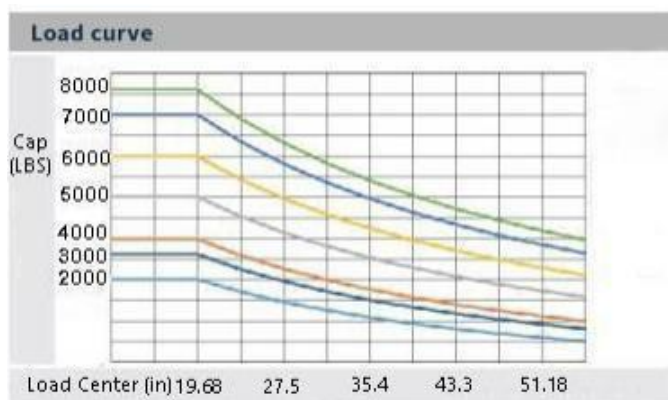


## EK25GB Electric Forklift

Model		EK25GB
Lift		Electric
Drive		Sit-Down
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	65.35
Lifting height	(in)	189
Free lifting height	(in)	47.48
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		3-way valve
Overall length	(in)	137.95
Overall width	(in)	46.45
Fork size, (thick/width/length)	(in)	1.57/4.72/42.12
Min Ground Clearance	(in)	3.95
Turning radius	(in)	84.2
Traveling Speed (laden/unladen)	MPH	9/9.3
Lift speed, laden/unladen	(in/s)	17.3/11.4
Service Brake		Hydraulic Foot Pedal
Charger	(	3 PHASE 480V
Battery voltage	(V/Ah)	48V/600Ah Lead Acid
Service Weight	(lb.)	9981 lb.

The EKKO EK25GB 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 lb.
- Raised Height 189" (15.75ft)
- Side Shift
- Solid Pneumatic Tires
- ZAPI Controller
- Battery 48/600 AH Lead acid
- 3-Phase 480V Charger (optional 220V)

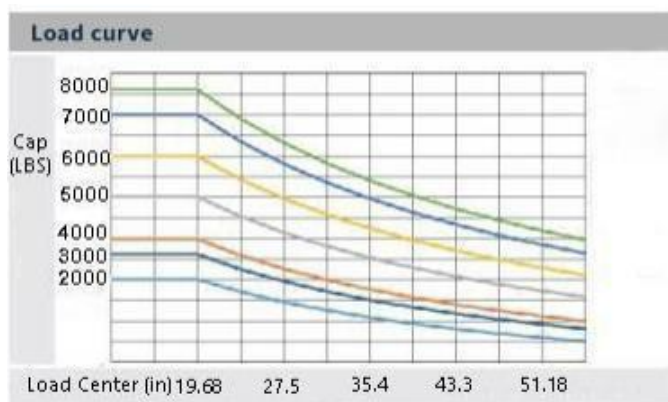




## EK20G-LI Lithium Powered Forklift

Model		EK20G-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4500
Load center distance	(in)	24
Wheelbase	(in)	65.4
Lifting height	(in)	189
Free lifting height	(in)	47.8
Lowered mast height	(in)	79
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		3-way valve
Overall length	(in)	133
Overall width	(in)	46.47
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	85
Travel Speed (laden/unladen)	(mph)	9/9.3
Ground clearance at mast	(in)	3.95
Service Brake		Hydraulicfoot Pedal
Controller		ZAPI
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	80V/202Ah
Service Weight	(lb.)	9032

The EKKO EK20G-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4500 Lbs.
- Raised Height 189" (15.75ft)
- Side Shift
- Free Lift 47.48"
- ZAPI Controller
- Solid Pneumatic Tires
- Battery 80V/202Ah Lithium
- Charger 3-Phase 480V (optional 220V & 110V)

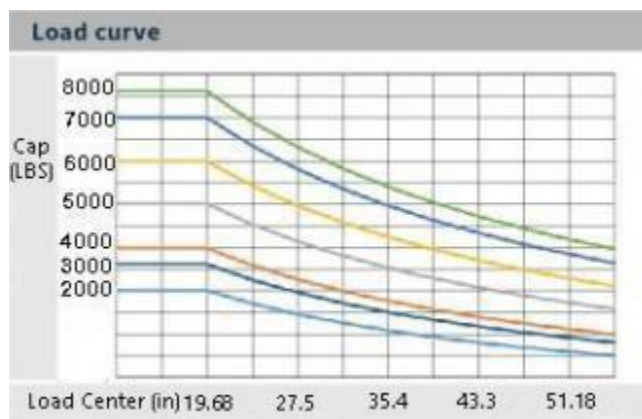


## EK25G-LI Lithium Powered Forklift

Model		EK25G-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	65.35
Lifting height	(in)	189
Free lifting height	(in)	47.48
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		3-way valve
Overall length	(in)	137.95
Overall width	(in)	46.45
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	84.2
Max Gradient Performance (laden/unladen)	(%)	15/25
Ground clearance at mast	(in)	3.95
Service Brake		Hydraulicfoot Pedal
Controller		ZAPI
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	80V/202Ah
Service Weight	(lb.)	

The EKKO EK25G-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 Lbs.
- Raised Height 189" (15.75ft)
- Side Shift
- Free Lift 47.48"
- ZAPI Controller
- Solid Pneumatic Tires
- Battery 80V/202Ah Lithium
- Charger 3-Phase 480V (optional 220V & 110V)

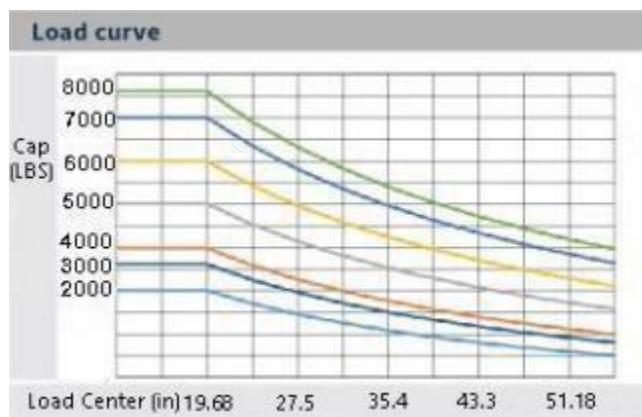




## EK25G-212LI Lithium Powered Forklift

Model		EK25G-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	65.35
Lifting height	(in)	212
Free lifting height	(in)	54.9
Lowered mast height	(in)	94.5
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		3-way valve
Overall length	(in)	138
Overall width	(in)	46.45
Fork size, Length	(in)	42
Min. Outside Turning Radius	(in)	84.2
Max Gradient Performance (laden/unladen)	(%)	15/25
Ground clearance at mast	(in)	3.95
Service Brake		Hydraulicfoot Pedal
Controller		ZAPI
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	80V/202Ah
Service Weight	(lb.)	

The EKKO EK25G-212LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 Lbs.
- Raised Height 212" (17.67ft)
- Side Shift
- Free Lift 54.9"
- ZAPI Controller
- Solid Pneumatic Tires
- Battery 80V/202Ah Lithium
- Charger 3-Phase 480V (optional 220V & 110V)

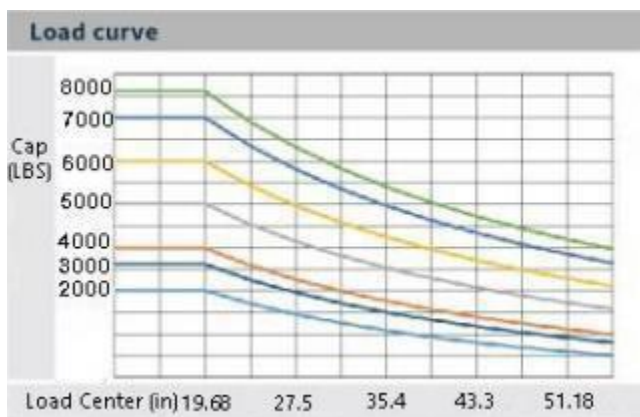

## EK25T-LI Lithium Powered Forklift

Model		EK25T-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	63.7
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length without forks	(in)	90
Overall width	(in)	45.2
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	78.7
Travel Speed (laden/unladen)	(mph)	8.4/9
Ground clearance at mast	(in)	4.3
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	80V/100A
Battery, Lithium	(V/A)	80v/202Ah
Service Weight	(lb.)	8900

The EKKO EK25T-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 43.7"
- Cushion Tires
- Lithium Battery 80V/202Ah
- Charger 3-Phase 480V (optional 110V)



## EK40T-LI Lithium Powered Forklift

Model		EK40T-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	8000
Load center distance	(in)	24
Wheelbase	(in)	63.7
Lifting height	(in)	185
Free lifting height	(in)	38
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length without forks	(in)	109.3
Overall width	(in)	54.3
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	98.4
Travel Speed (laden/unladen)	(mph)	7.5/8.7
Ground clearance at mast	(in)	4.3
Service Brake		Hydraulic foot Pedal
Controller		INMOTION
Charger	(V/A)	80V/100A
Battery, Lithium	(V/A)	80v/230Ah
Service Weight	(lb.)	11800

The EKKO EK40T-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 8000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 38"
- Cushion Tires
- Lithium Battery 80V/230Ah
- Charger 3-Phase 480V (optional 110V)



## EK20GT-LI Lithium Powered Forklift

Model		EK20GT-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	63.7
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length	(in)	138.9
Overall width	(in)	45.2
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	86.2
Travel Speed (laden/unladen)	(mph)	9.3/9.3
Ground clearance at mast	(in)	4.3
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	80v/150Ah
Service Weight	(lb.)	7594

The EKKO EK20GT-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 43.7"
- EPS (Electric Power Steering)
- Solid Pneumatic Tires
- Battery 80V/150Ah
- Charger 3-Phase 480V (optional 220V & 110V)





## EK25GT-LI Lithium Powered Forklift

Model		EK25GT-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5000
Load center distance	(in)	24
Wheelbase	(in)	63.7
Lifting height	(in)	185
Free lifting height	(in)	43.7
Lowered mast height	(in)	83
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length	(in)	141
Overall width	(in)	45.2
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	88.9
Travel Speed (laden/unladen)	(mph)	9.3/9.3
Ground clearance at mast	(in)	4.3
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	80v/202Ah
Service Weight	(lb.)	8344

The EKKO EK25GT-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 43.7"
- EPS (Electric Power Steering)
- Solid Pneumatic Tires
- Battery 80V/202Ah
- Charger 3-Phase 480V (optional 220V & 110V)



## EK30GT-LI Lithium Powered Forklift

Model		EK30GT-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	6000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length	(in)	148
Overall width	(in)	48.2
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	96.2
Travel Speed (laden/unladen)	(mph)	9.3/9.3
Ground clearance at mast	(in)	4.7
Service Brake		Hydraulic foot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	115v/173Ah
Service Weight	(lb.)	9788

The EKKO EK30GT-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 6000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 37.9"
- EPS (Electric Power Steering)
- Solid Pneumatic Tires
- Battery 115V/173Ah
- Charger 3-Phase 480V (optional 220V & 110V)



## EK35GT-LI Lithium Powered Forklift

Model		EK35GT-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	7000
Load center distance	(in)	24
Wheelbase	(in)	66.9
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length	(in)	150
Overall width	(in)	50.5
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	98.2
Travel Speed (laden/unladen)	(mph)	9.3/9.3
Ground clearance at mast	(in)	4.7
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	115V/173Ah
Service Weight	(lb.)	10648

The EKKO EK35GT-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 7000 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 37.9"
- EPS (Electric Power Steering)
- Solid Pneumatic Tires
- Battery 115V/173Ah
- Charger 3-Phase 480V (optional 220V & 110V)



## EK40GT-LI Lithium Powered Forklift

Model		EK40GT-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	8500
Load center distance	(in)	24
Wheelbase	(in)	70.8
Lifting height	(in)	185
Free lifting height	(in)	37.9
Lowered mast height	(in)	86.2
Mast/Fork carriage tilt forward/backward	( ° )	6/6
Side Shift		Cascade
Overall length	(in)	154
Overall width	(in)	53.7
Fork size, Length	(in)	42.1
Min. Outside Turning Radius	(in)	99.6
Travel Speed (laden/unladen)	(mph)	9.3/9.3
Ground clearance at mast	(in)	4.7
Service Brake		Hydraulicfoot Pedal
Controller		INMOTION
Charger	(V/A)	3 phase 480V
Battery, Lithium	(V/A)	115V/173Ah
Service Weight	(lb.)	11364

The EKKO EK40GT-LI 4 Wheel Electric Forklift is designed for use for all your material handling demands. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 8500 Lbs.
- Raised Height 185" (15.4ft)
- Cascade Side Shift
- Shimadzu 4-Way Valve
- Free Lift 37.9"
- EPS (Electric Power Steering)
- Solid Pneumatic Tires
- Battery 115V/173Ah
- Charger 3-Phase 480V (optional 220V & 110V)






# EK18RR-275Li Stand-up Rider Reach Truck

Model		EK18RR-275Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Lifting height	(in)	270
Side Shifting Forks		3 Way Valve
Free Lift	(in)	79.92
Lowered mast height	(in)	123.27
Overall length/Extended	(in)	102.28
Overall width	(in)	54.72
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35.04
Reach Distance	(in)	22.44
Turning radius	(in)	75
Charger	(V/A)	48V/65A
Driving Motor	(V/W)	48V/6000
EPS Steering Motor	(V/W)	Yes
Lifting Motor	(V/W)	48V/11000
Battery voltage	(V/Ah)	48V/404Ah
Service Weight	(lb.)	9330



The EKKO EK18RR-275Li Stand-up Rider Reach Truck is ideal and designed for narrow aisles with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

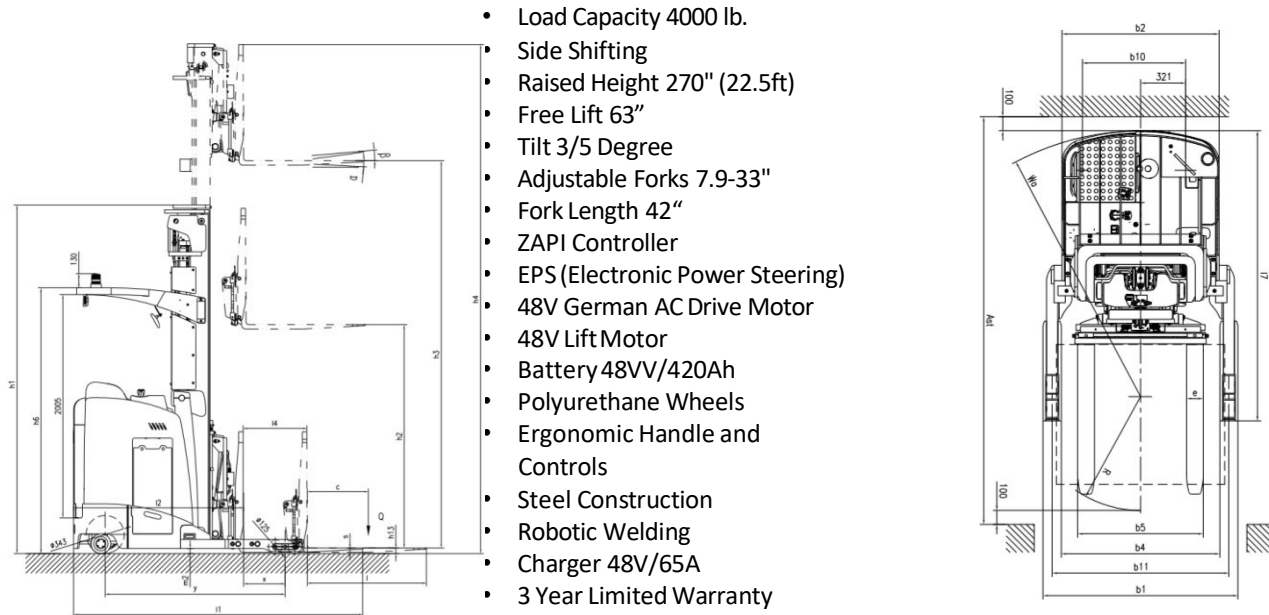


# EK18RR Stand-up Rider Reach Truck

Model		EK18RR
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Lifting height	(in)	275
Side Shifting Forks		3 Way Valve
Free Lift	(in)	79.92
Lowered mast height	(in)	123.27
Overall length/Extended	(in)	102.28
Overall width	(in)	54.72
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35.04
Reach Distance	(in)	22.44
Turning radius	(in)	75
Charger	(V/A)	48V/65A
Driving Motor	(V/W)	48V/6000
EPS Steering Motor	(V/W)	Yes
Lifting Motor	(V/W)	48V/11000
Battery voltage	(V/Ah)	48V/420Ah
Service Weight	(lb.)	9330




The EKKO EK18RR Stand-Up Reach Truck is ideal and designed for narrow aisles with the combination of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

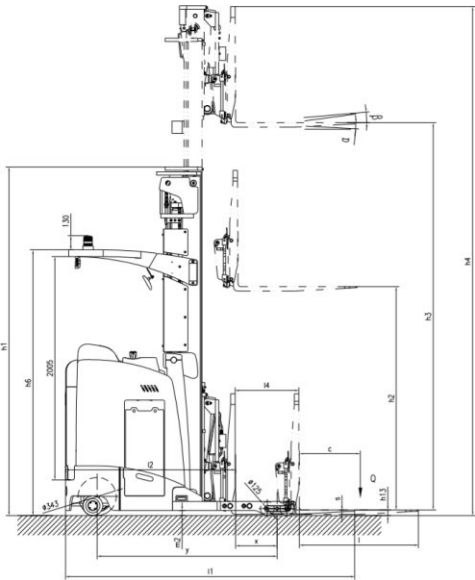

- Load Capacity 4000 lb.
- Side Shifting
- Raised Height 275" (14.75ft)
- Reach Distance of 19.7"
- Free Lift 63"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 48V German AC Drive Motor
- 48V Lift Motor
- Battery 48VV/420Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 48V/65A
- 3 Year Limited Warranty

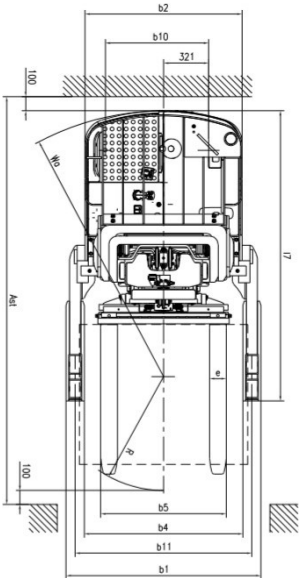


# EK18RRL Stand-up Rider Reach Truck

Model		EK18RRL
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Lifting height	(in)	196
Side Shifting Forks		3 Way Valve
Free Lift	(in)	53.15
Lowered mast height	(in)	96.42
Overall length/Extended	(in)	102.28
Overall width	(in)	54.72
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35.04
Reach Distance	(in)	22.44
Turning radius	(in)	75
Charger	(V/A)	48V/65A
Driving Motor	(V/W)	48V/6000
EPS Steering Motor	(V/W)	Yes
Lifting Motor	(V/W)	48V/11000
Battery voltage	(V/Ah)	48V/420Ah
Service Weight	(lb.)	9000




The EKKO EK18RRL Stand-Up Reach Truck is ideal and designed for narrow aisles with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

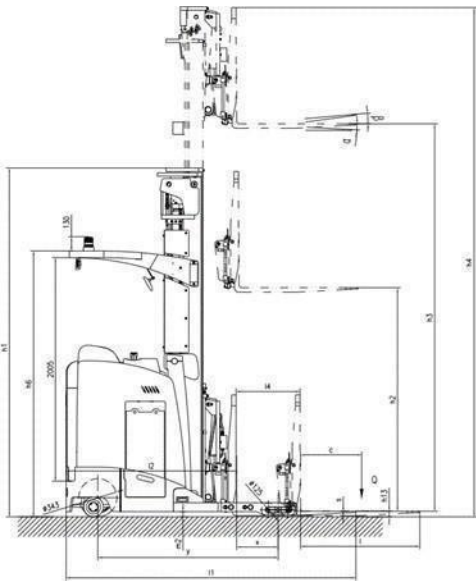

- Load Capacity 4000 lb.
- Side Shifting
- Raised Height 196" (14.75ft)
- Reach Distance of 19.7"
- Free Lift 63"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 48V German AC Drive Motor
- 48V Lift Motor
- Battery 48V/420Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 48V/65A
- 3 Year Limited Warranty

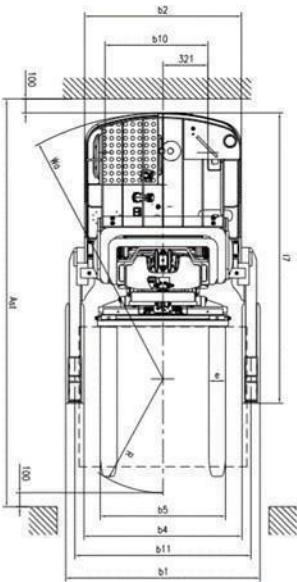



## EK18RF Stand-Up Rider Forklift

Model		EK18RF
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	48.8
Lifting height	(in)	216
Free lifting height	(in)	61.34
Lowered mast height	(in)	91.77
Mast/Fork carriage tilt forward/backward	( ° )	3/5
Side Shifting Forks		3-way valve
Overall length	(in)	72.52
Overall width	(in)	42.52
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35
Turning radius	(in)	58.5
Max gradient performance, laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	9.8/15
Lowering speed, laden/unladen	(in/s)	9.5/10.2
Charger	(V/A)	48V/65A
Driving Motor	(V/W)	ZF AC 48/6000
Lifting Motor	(V/W)	48/7700
Battery voltage	(V/Ah)	48V/420Ah (Side)
Service Weight	(lb.)	7940

The EKKO EK18RF Stand-up Forklift is designed for use for small aisles, limited spaces, and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 216" (18ft)
- Side Shifting
- Free Lift 61.34"
- Adjustable Forks 8.7-35"
- Fork Length 42"
- Overhead Guard 90.08"
- EPS (Electric Power Steering)
- Curtis Instrument Controller
- 48V AC Drive Motor
- 48V Lift Motor
- Battery 48V/420Ah
- Solid Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 48V/65A
- 3 Year Limited Warranty

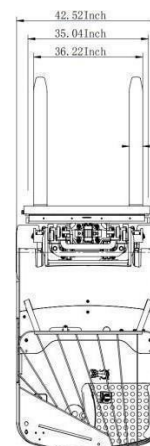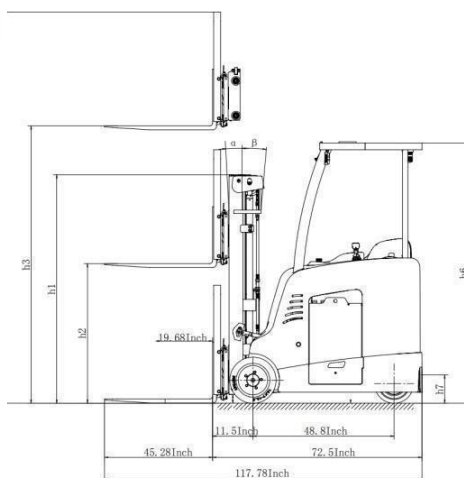



# EK18RF-Li Stand-up Rider Forklift





Model		EK18RF-Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Lifting height	(in)	216
Side Shifting Forks		3 Way Valve
Free Lift	(in)	79.92
Lowered mast height	(in)	95"
Overall length/Extended	(in)	102.28
Overall width	(in)	54.72
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35.04
Reach Distance	(in)	22.44
Turning radius	(in)	60
Charger	(V/A)	48V/200A
Driving Motor	(V/W)	48V/6000
EPS Steering Motor	(V/W)	Yes
Lifting Motor	(V/W)	48V/11000
Battery voltage (Lithium)	(V/Ah)	48V/350Ah
Service Weight	(lb.)	8150

The EKKO EK18RF-Li Stand-up Rider Forklift is ideal and designed for narrow aisles with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 216" (18ft)
- Side Shift
- Adjustable Forks 9.4-35.6"
- Fork Length 45.3"
- Hydraulic Steering
- Curtis Instrument Controller
- German AC Drive Motor
- Battery 48V/350Ah Lithium
- Solid Cushion Load Tires
- Polyurethane Drive Tires
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 440V three phase
- 3 Year Limited Warranty

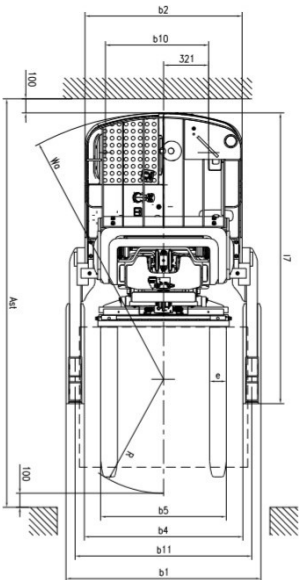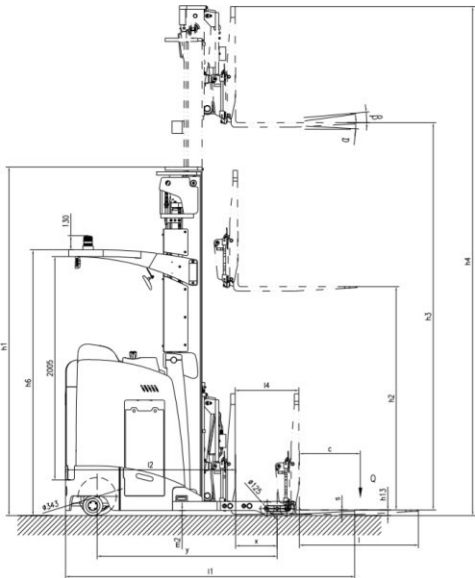


## EK18RFL Stand-Up Rider Forklift

Model		EK18RFL
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	48.8
Lifting height	(in)	189
Free lifting height	(in)	52.17
Lowered mast height	(in)	82.6
Mast/Fork carriage tilt forward/backward	( ° )	3/5
Side Shifting Forks		3-way valve
Overall length	(in)	72.52
Overall width	(in)	42.52
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35
Turning radius	(in)	58.5
Max gradient performance, laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	9.8/15
Lowering speed, laden/unladen	(in/s)	9.5/10.2
Charger	(V/A)	48V/65A
Driving Motor	(V/W)	ZF AC 48/6000
Lifting Motor	(V/W)	48/7700
Battery voltage	(V/Ah)	48V/420Ah (Side)
Service Weight	(lb.)	7870

The EKKO EK18RFL Stand-up Forklift is designed for use for small aisles, limited spaces, and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 189" (15.75ft)
- Side Shifting
- Free Lift 52.17"
- Adjustable Forks 8.7-35"
- Fork Length 42"
- Overhead Guard 90.08"
- EPS (Electric Power Steering)
- Curtis Instrument Controller
- 48V AC Drive Motor
- 48V Lift Motor
- Battery 48V/420Ah
- Solid Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 48V/65A
- 3 Year Limited Warranty

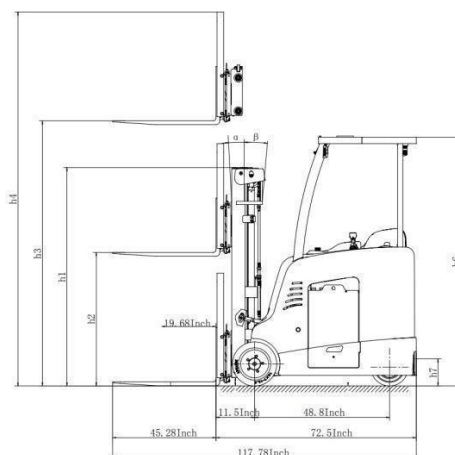

# ER15-138Li Lithium Walkie Reach Truck





Model		ER15-138Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	138
Side Shifting Forks		3 Way Valve
Lowered mast height	(in)	87.4
Overall length/Extended	(in)	94/113.8
Overall width	(in)	43.8
Fork size, Thick/Width/Length	(in)	1.38/3.9/42
Fork adjust width	(in)	7.9-33
Reach Distance	(in)	19.7
Turning radius	(in)	64
Charger	(V/A)	24V/50A
Driving Motor	(V/W)	AC 24V/3kw
EPS Steering Motor	(V/W)	24/200W
Lifting Motor	(KW)	4.5
Battery voltage	(V/Ah)	24V/200Ah Lithium
Service Weight	(lb.)	3780

The EKKO ER15-138Li Lithium Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Side Shifting
- Raised Height 138" (11.5ft)
- Reach Distance of 19.7"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- AC Lift Motor
- Battery 24V/200Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50A
- 3 Year Limited Warranty

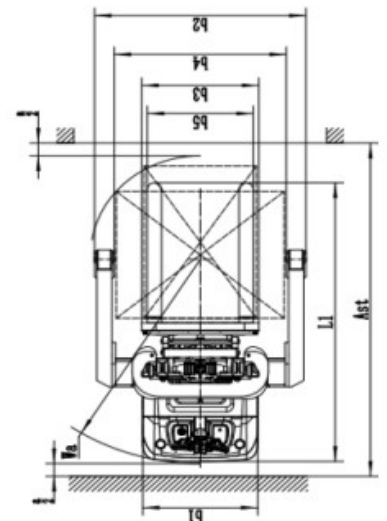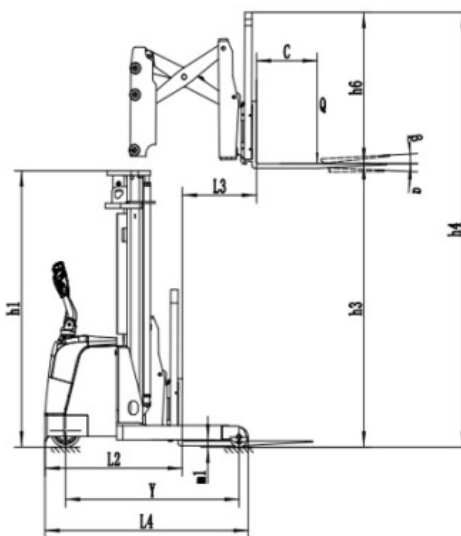

## ER15-177Li Lithium Walkie Reach Truck





Model		ER15-177Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	177
Side Shifting Forks		3 Way Valve
Lowered mast height	(in)	87.4
Overall length/Extended	(in)	94/113.8
Overall width	(in)	43.8
Fork size, Thick/Width/Length	(in)	1.38/3.9/42
Fork adjust width	(in)	7.9-33
Reach Distance	(in)	19.7
Turning radius	(in)	64
Charger	(V/A)	24V/50A
Driving Motor	(V/W)	AC 24V/3kw
EPS Steering Motor	(V/W)	24/200W
Lifting Motor	(KW)	4.5
Battery voltage	(V/Ah)	24V/200Ah Lithium
Service Weight	(lb.)	4565

The EKKO ER15-177Li Lithium Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Side Shifting
- Raised Height 177" (14.75ft)
- Reach Distance of 19.7"
- Free Lift 60.2"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/200Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50A
- 3 Year Limited Warranty

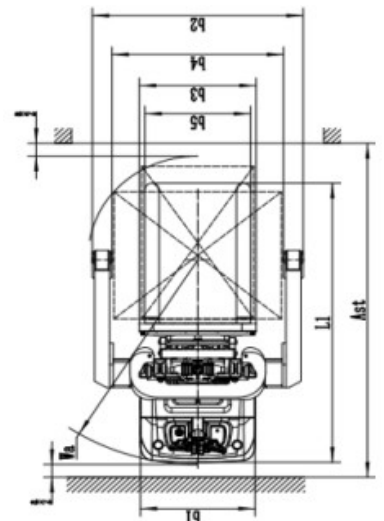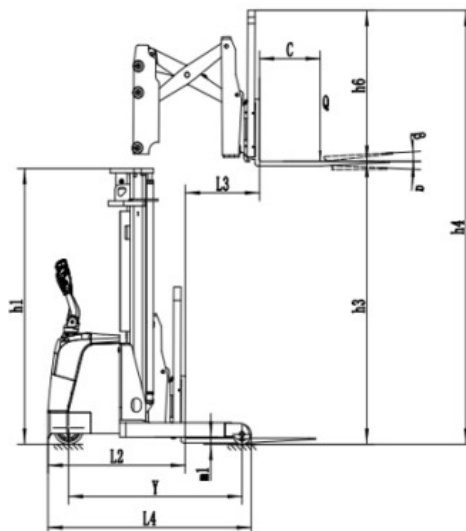



# ER15-189Li Lithium Walkie Reach Truck





Model		ER15-189Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	189
Side Shifting Forks		3 Way Valve
Lowered mast height	(in)	87.4
Overall length/Extended	(in)	94/113.8
Overall width	(in)	43.8
Fork size, Thick/Width/Length	(in)	1.38/3.9/42
Fork adjust width	(in)	7.9-33
Reach Distance	(in)	19.7
Turning radius	(in)	64
Charger	(V/A)	24V/50A
Driving Motor	(V/W)	AC 24V/3kw
EPS Steering Motor	(V/W)	24/200W
Lifting Motor	(KW)	4.5
Battery voltage	(V/Ah)	24V/200Ah Lithium
Service Weight	(lb.)	4590

The EKKO ER15-189Li Lithium Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Side Shifting
- Raised Height 189" (15.75ft)
- Reach Distance of 19.7"
- Free Lift 64.2"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/200Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50A
- 3 Year Limited Warranty

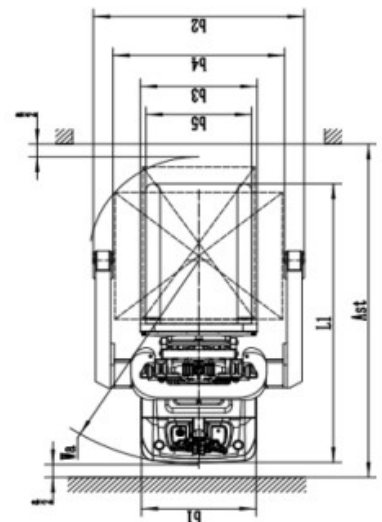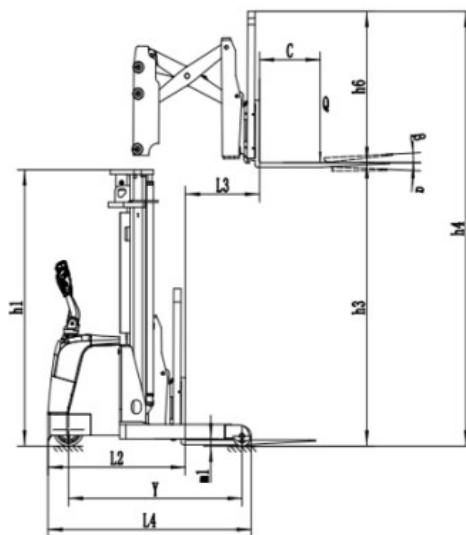

# ER15-216Li Lithium Walkie Reach Truck





Model		ER15-216Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	216
Side Shifting Forks		3 Way Valve
Lowered mast height	(in)	87.4
Overall length/Extended	(in)	94/113.8
Overall width	(in)	43.8
Fork size, Thick/Width/Length	(in)	1.38/3.9/42
Fork adjust width	(in)	7.9-33
Reach Distance	(in)	19.7
Turning radius	(in)	64
Charger	(V/A)	24V/50A
Driving Motor	(V/W)	AC 24V/3kw
EPS Steering Motor	(V/W)	24/200W
Lifting Motor	(KW)	4.5
Battery voltage	(V/Ah)	24V/200Ah Lithium
Service Weight	(lb.)	4700

The EKKO ER15-216Li Lithium Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Side Shifting
- Raised Height 216" (18ft)
- Reach Distance of 19.7"
- Free Lift 66.9"
- Tilt 3/5 Degree
- Adjustable Forks 7.9-33"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/200Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50A
- 3 Year Limited Warranty

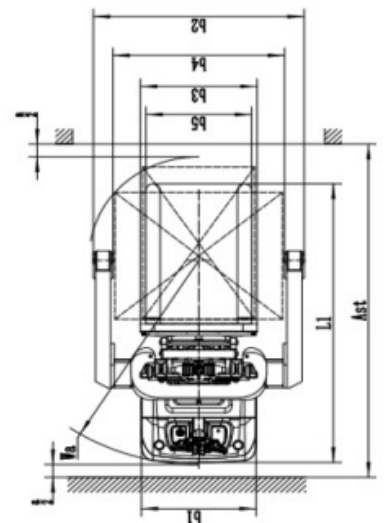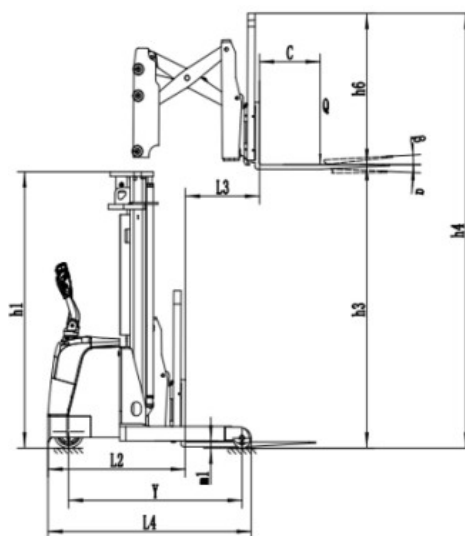

## EK18RF-216Li Stand-up Rider Forklift

Model		EK18RF-216Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center distance	(in)	24
Wheelbase	(in)	48.8
Lifting height	(in)	216
Free lifting height	(in)	61.34
Lowered mast height	(in)	91.77
Mast/Fork carriage tilt forward/backward	( ° )	3/5
Side Shifting Forks		3-way valve
Overall length	(in)	72.52
Overall width	(in)	42.52
Fork size, Thick/Width/Length	(in)	1.58/4.72/42
Fork adjust width	(in)	35
Turning radius	(in)	58.5
Max gradient performance, laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	9.8/15
Lowering speed, laden/unladen	(in/s)	9.5/10.2
Charger	(V/A)	48V/200A
Driving Motor	(V/W)	ZF AC 48/6000
Lifting Motor	(V/W)	48/7700
Battery voltage (Lithium)	(V/Ah)	48V/350Ah
Service Weight	(lb.)	7800

The EKKO EK18RF-216Li Stand-up Rider Forklift is designed for use for small aisles, limited spaces, and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 216" (18'ft)
- Side Shift
- Free Lift 72"
- Adjustable Forks 8.7-29"
- Fork Length 42"
- Overhead Guard 82.68"
- EPS (Electric Power Steering)
- Curtis Instrument Controller
- 48V German AC Drive Motor
- 48V Lift Motor
- Lithium Battery 48V/350Ah
- Solid Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 48V/200A (2-Hour Fast Charge)
- 3 Year Limited Warranty



# EH15TH Moving Mast Walkie Reach Truck




Model		EH15TH
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	216
Lowered mast height	(in)	93.3
Overall length	(in)	111.6
Overall width	(in)	41
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.7-28
Reach Distance	(in)	19.7
Turning radius	(in)	67
Charger	(V/A)	24V/40A
Driving Motor	(V/W)	AC 24V/2.5kw
EPS Steering Motor	(V/W)	24/200W
Lifting Motor	(V/W)	24V/3000W
Battery voltage	(V/Ah)	24V/270Ah
Service Weight	(lb.)	4200

The EKKO EH15THMoving Mast Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- 
- Raised Height 138" (9.83ft)
- Reach Distance of 19.7"
- Adjustable Forks 8.7-29.7"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/270Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger
- 3 Year Limited Warranty

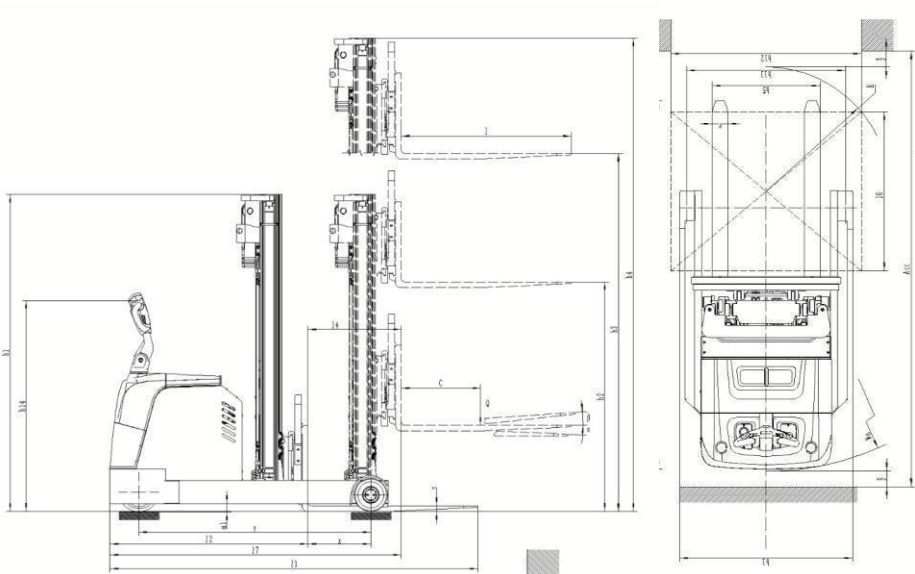



# EH15T Moving Mast Walkie Reach Truck




Model		EH15T
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Lifting height	(in)	138
Lowered mast height	(in)	93.3
Overall length	(in)	111.6
Overall width	(in)	41
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.7-28
Reach Distance	(in)	19.7
Turning radius	(in)	67
Charger	(in)	24V/40A
Driving Motor	(V/A)	AC 24V/2500W
Steering Motor	(V/W)	24V/200W
Lifting Motor	(V/W)	24V/3000W
Battery voltage	(V/Ah)	24V/270Ah
Service Weight	(lb.)	4200

The EKKO EH15T Moving Mast Walkie Reach Truck is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 138" (11.5ft)
- Reach Distance of 19.7"
- Adjustable Forks 8.7-29.1"
- Fork Length 42"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/270Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger
- 3 Year Limited Warranty

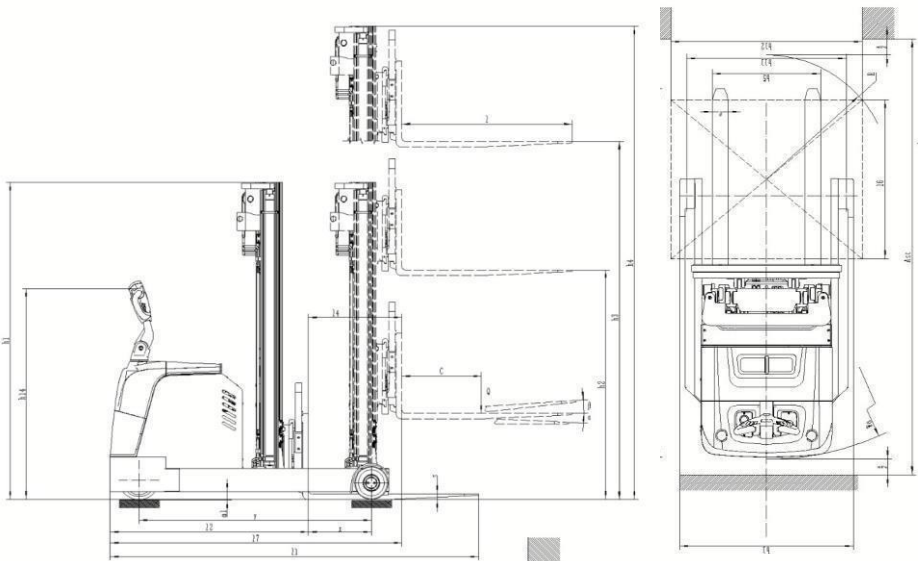

# EOPS20-157 Semi-Electric Order Picker




Model		EOPS20-157
Lift		Semi-Electric
Drive		Electric
Load capacity	(lb.)	440
Load center distance	(in)	24
Lifting height	(in)	157
Lowered mast height	(in)	93.3
Overall length	(in)	111.6
Overall width	(in)	41
Fork size, Thick/Width/Length	(in)	1.4/4/45.2
Fork adjust width	(in)	8.7-28
Reach Distance	(in)	19.7
Turning radius	(in)	67
Charger	(in)	24V/40A
Driving Motor	(V/A)	AC 24V/2500W
Steering Motor	(V/W)	24V/200W
Lifting Motor	(kW)	1.6
Battery voltage	(V/Ah)	24V/270Ah
Service Weight	(lb.)	837

Designed to streamline your order picking process, the EKKO EOPS20-157 Semi-Electric Order Picker efficiently retrieves orders from racking, storage facilities, manufacturing floors, and warehouses.

Constructed with high-quality steel and components, this durable order picker features robust drive systems capable of handling various terrains, usage conditions, and directional changes.

- Load Capacity 440 lb.
- Raised Height 157" (13.1 ft.)
- Over Loading Limited
- Safety Brackets
- Two Brakes and Two Brake Pads
- Emergency Stop/Down Button
- Battery 12V/120Ah
- Polyurethane Wheels
- Steel Construction
- Robotic Welding
- Battery Included
- Internal Charger
- 3 Years Limited Warranty

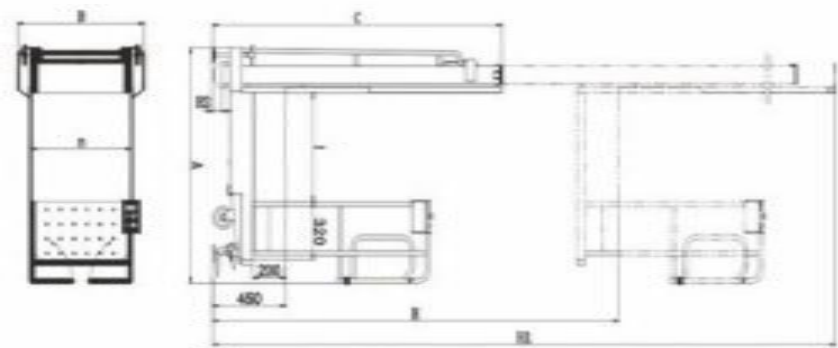

# EOPS20-177 Semi-Electric Order Picker




Model		EOPS20-177
Lift		Semi-Electric
Drive		Electric
Load capacity	(lb.)	440
Load center distance	(in)	24
Lifting height	(in)	177
Lowered mast height	(in)	93.3
Overall length	(in)	111.6
Overall width	(in)	41
Fork size, Thick/Width/Length	(in)	1.4/4/45.2
Fork adjust width	(in)	8.7-28
Reach Distance	(in)	19.7
Turning radius	(in)	67
Charger	(in)	24V/40A
Driving Motor	(V/A)	AC 24V/2500W
Steering Motor	(V/W)	24V/200W
Lifting Motor	(kW)	1.6
Battery voltage	(V/Ah)	24V/270Ah
Service Weight	(lb.)	837

Designed to streamline your order picking process, the EKKO EOPS20-157 Semi-Electric Order Picker efficiently retrieves orders from racking, storage facilities, manufacturing floors, and warehouses.

Constructed with high-quality steel and components, this durable order picker features robust drive systems capable of handling various terrains, usage conditions, and directional changes.

- Load Capacity 440 lb.
- Raised Height 157" (13.1 ft.)
- Over Loading Limited
- Safety Brackets
- Two Brakes and Two Brake Pads
- Emergency Stop/Down Button
- Battery 12V/120Ah
- Polyurethane Wheels
- Steel Construction
- Robotic Welding
- Battery Included
- Internal Charger
- 3 Years Limited Warranty

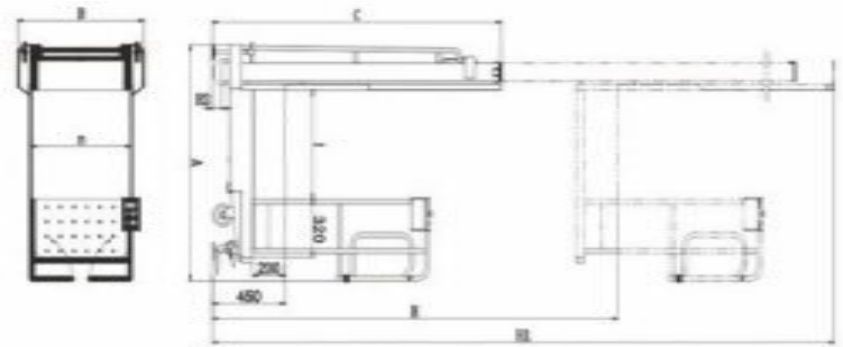

# EOP68 Order Picker



The EKKO EOP68 Electric Mid-Level Order Picker is designed sole purpose is to pick your orders from your racking and storage facility rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2200 lb.
- Raised Height 177" (14.75 ft.)
- Adjustable Forks
- Auxiliary Fork
- Triple Mast
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- German AC Drive Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Robotic Welding
- Charger Included
- Battery Included
- 3 Years Limited Warranty



Model		EOP68
Lift		Electric
Drive		Electric
Load capacity	(lb.)	2200
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	177
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	2856

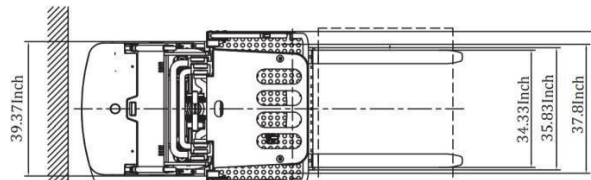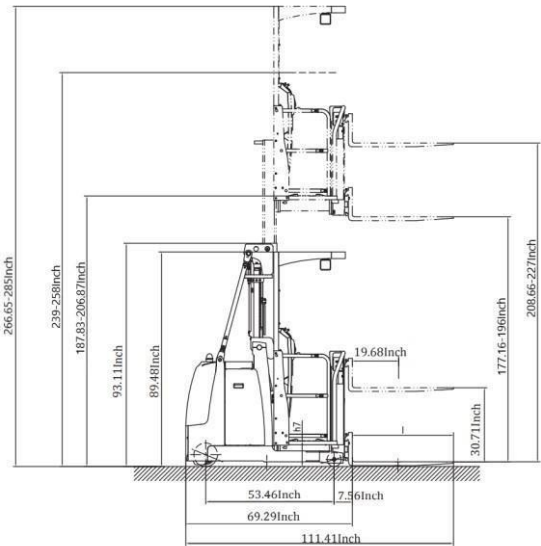



# EOP70 Order Picker



The EKKO EOP70 Electric Mid-Level Order Picker is designed sole purpose is to pick your orders from your racking and storage facility rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2200 lb.
- Raised Height 177" (14.75 ft.)
- Adjustable Forks
- Auxiliary Fork
- Triple Mast
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- German AC Drive Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Robotic Welding
- Charger Included
- Battery Included
- 3 Years Limited Warranty



Model		EOP70
Lift		Electric
Drive		Electric
Load capacity	(lb.)	2200
Load center distance	(in)	24
Wheelbase	(in)	
Lifting height	(in)	177
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4070

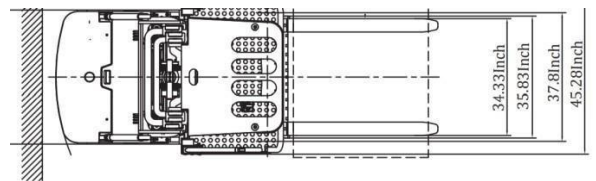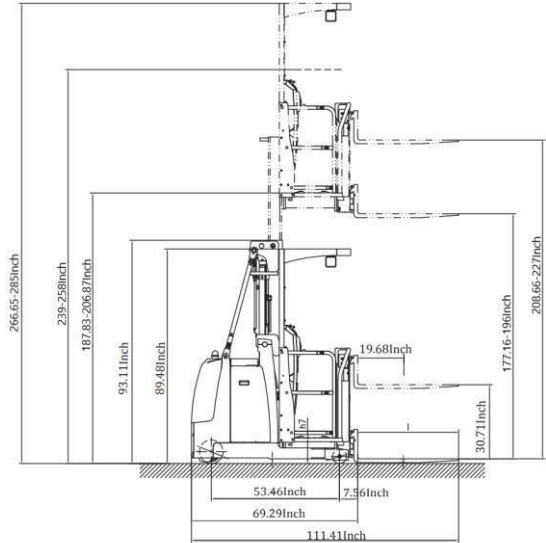

# EK13S-177 Counterbalanced Stacker


The EKKO EK13S-177 Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2860 lb.
- Raised Height 177" (14.75ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EK13S-177
Lift		Electric
Drive		Electric
Load capacity	(lb.)	2860
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	177
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4070

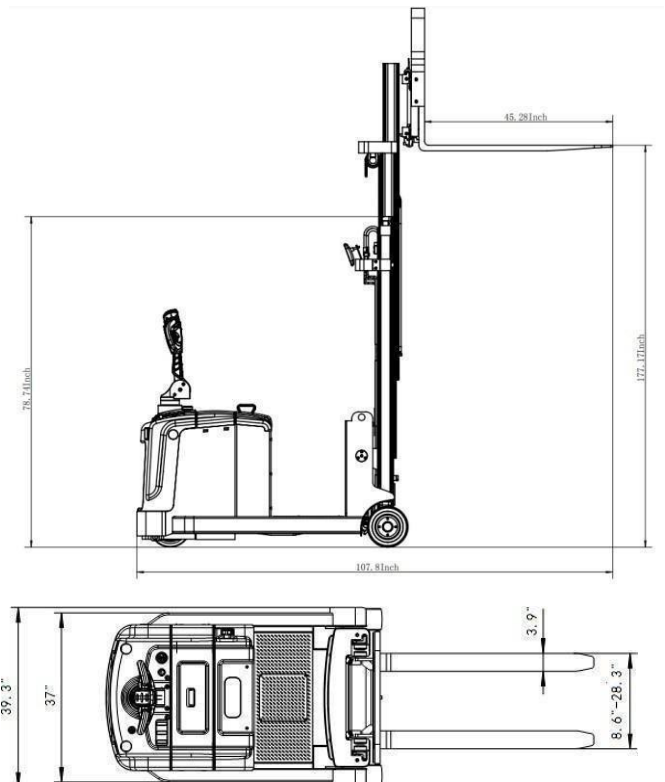


# EK14 Counterbalance Stacker

The EKKO EK14 Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and Components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 118" (9.83ft)
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

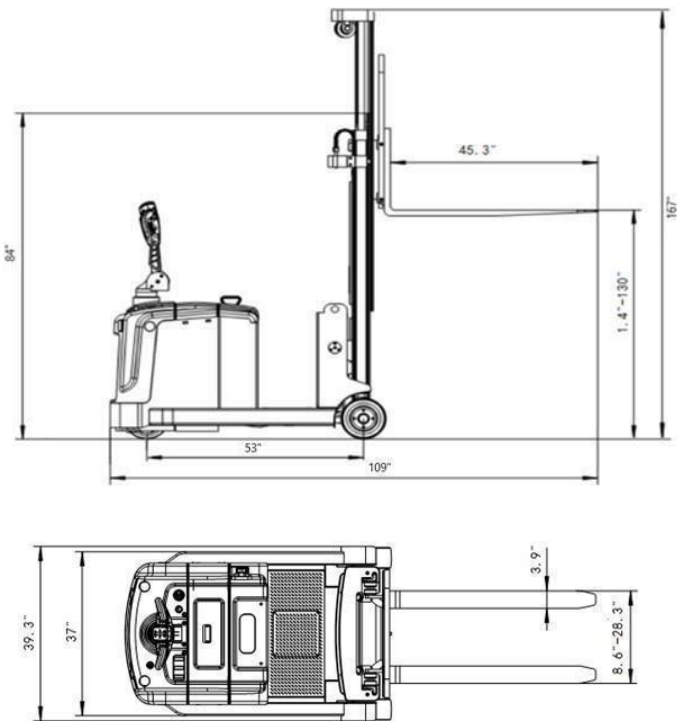


Model		EK14
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	47
Lifting height	(in)	118
Lowered mast height	(in)	78
Extended mast height	(in)	155
Mast/Forkcarriage tilt forward/backward	( ° )	2/5
Overall length	(in)	109
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	57
Gradient laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	4/5.1
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah
Service Weight	(lb.)	3740

# EK14-130 Counterbalanced Stacker

The EKKO EK14-130 Fully Powered Counterbalance Walkie Stacker is designed with the combination of versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and Components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 118" (9.83ft)
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

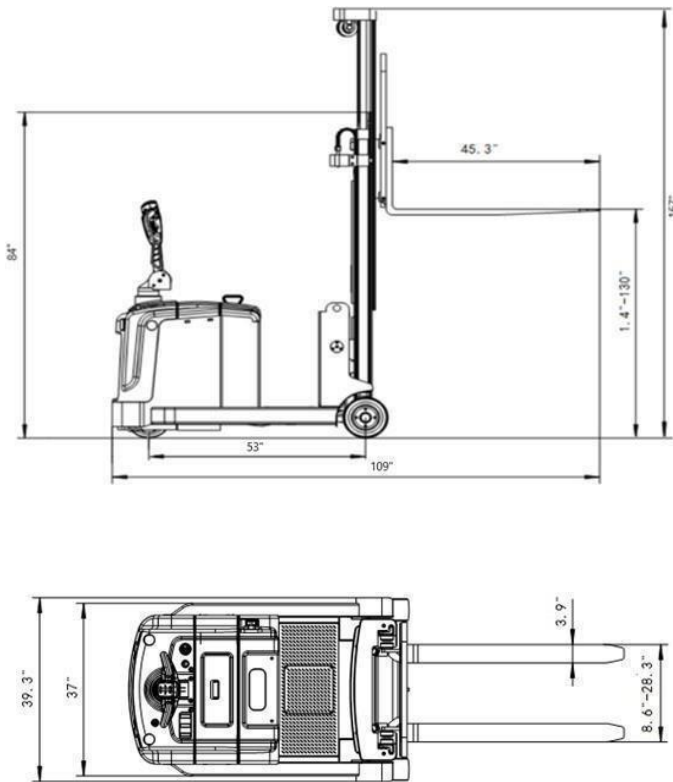

Model		EK14-130
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	47
Lifting height	(in)	130
Lowered mast height	(in)	84
Extended mast height	(in)	167
Mast/Forkcarriage tilt forward/backward	( ° )	2/5
Overall length	(in)	109
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjusts width	(in)	8.6-28.3
Turning radius	(in)	57
Gradient laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	4/5.1
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah
Service Weight	(lb.)	3840





# EK14S-130 Counterbalanced Stacker

The EKKO EK14S-130 Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 130" (10.8ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZFAC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EK14S-130
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	47
Lifting height	(in)	130
Side Shift		3 Way Valve
Lowered mast height	(in)	84
Extended mast height	(in)	167
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	109
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	57
Gradient performance, laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	4/5.1
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	3840

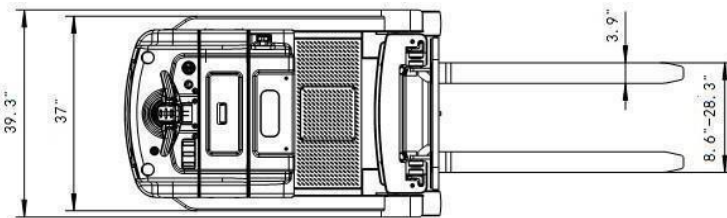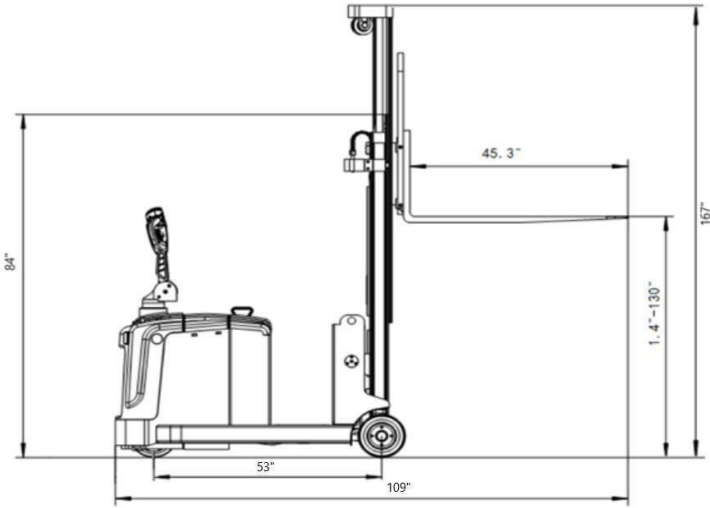


# EK14-138 Counterbalanced Stacker

The EKKO EK14-138 Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for

- Load Capacity 3300 lb.
- Raised Height 138" (10.8ft)
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

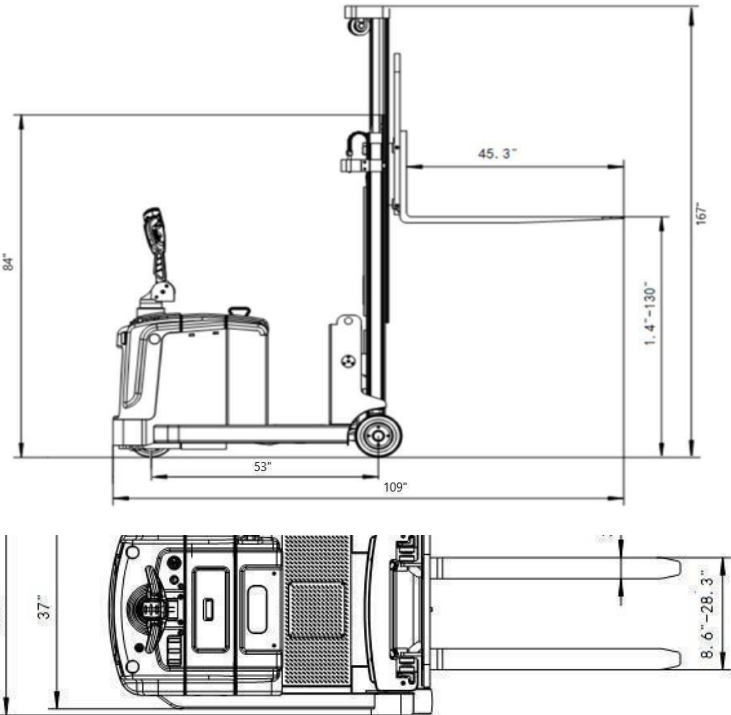

Model		EK14-138
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	47
Lifting height	(in)	138
Lowered mast height	(in)	84
Extended mast height	(in)	167
Mast/Fork carriage tilt forward/backward	( ° )	2/5
Overall length	(in)	109
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	57
Gradient laden/unladen	(%)	6/10
Lift speed, laden/unladen	(in/s)	4/5.1
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah
Service Weight	(lb.)	3840

# EK14-130Li Counterbalanced Stacker



The EKKO EK14-130-Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 130" (10.83ft)
- Adjustable Forks 8.6-28.3"
- Fork Length 45.3"
- Tilt 2/5 Degree
- Curtis Controller
- 24V AC Drive Motor
- 24V Lift Motor
- EPS (Electronic Power Steering)
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger Included
- Batteries Included
- 3 Years Limited Warranty



Model		EK14-130Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	130
Side Shift		3 Way Valve
Lowered mast height	(in)	84
Extended mast height	(in)	167
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	109
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	3840

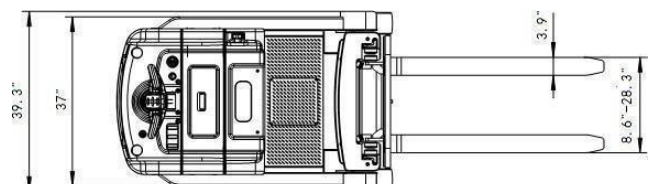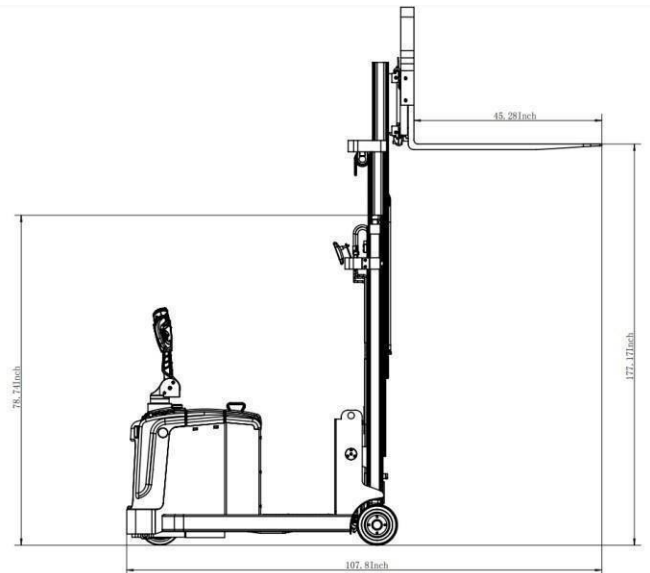

# EK14S-130Li Counterbalanced Stacker



The EKKO EK14S-130Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- 
- Raised Height 130" (10.83ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Robotic Welding
- 3 Year Limited Warranty



Model		EK14S-130Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	177
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4070

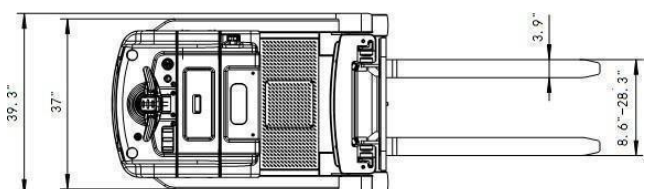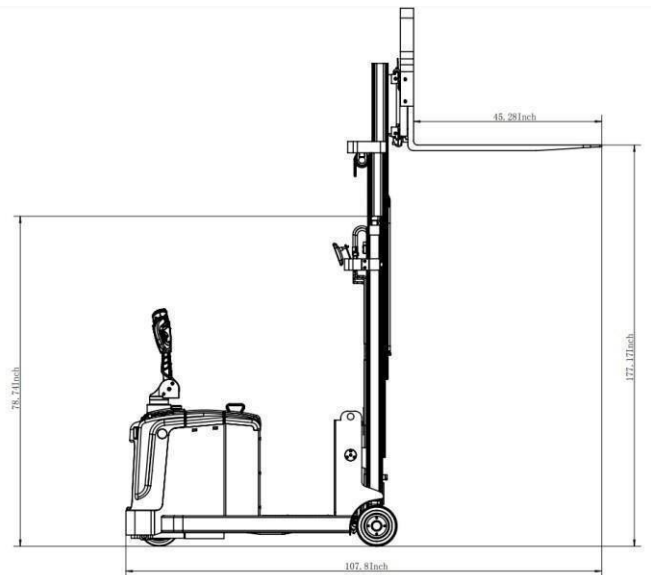



# EK14S-189Li Counterbalanced Stacker


The EKKO EK14S-189Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 189" (15.75ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Robotic Welding
- 3 Year Limited Warranty



Model		EK14S-189Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	189
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/45.3
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4350

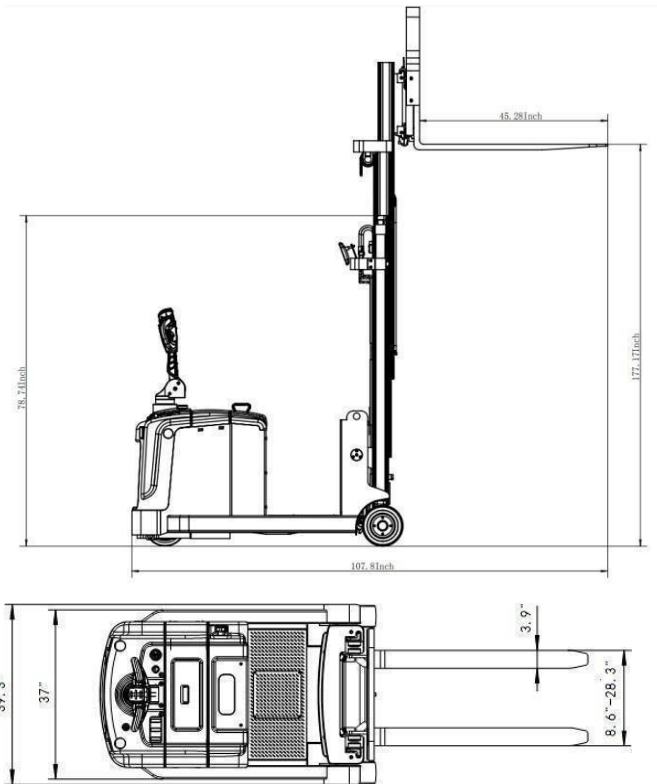

# EK14C-130 Counterbalanced Stacker


The EKKO EK14C-130 Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 130" (10.83ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 42"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EK14C-130
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3000
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	130
Side Shift		3 Way Valve
Lowered mast height	(in)	84.6
Extended mast height	(in)	226
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4230

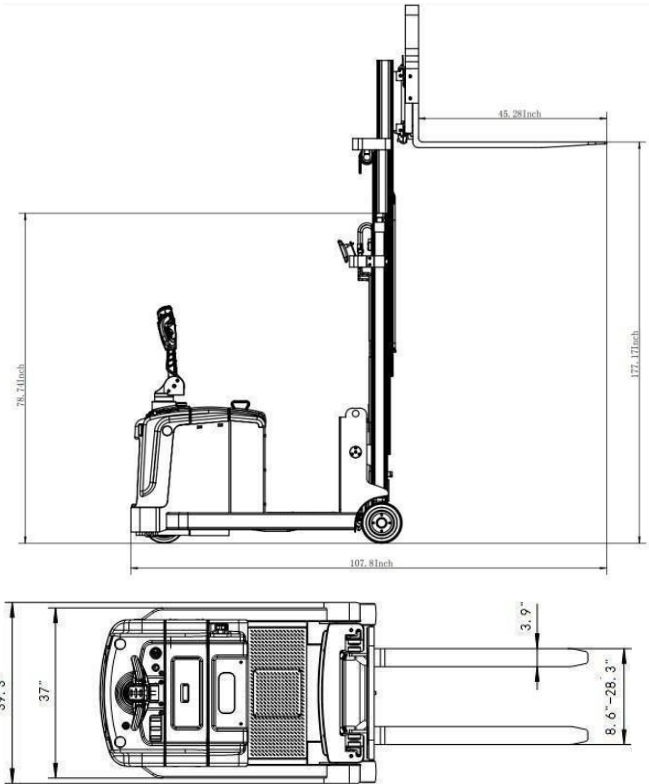


# EK14C-130Li Counterbalanced Stacker

The EKKO EK14C-130Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 130" (10.83ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 42"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EK14C-130Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3000
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	130
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4230


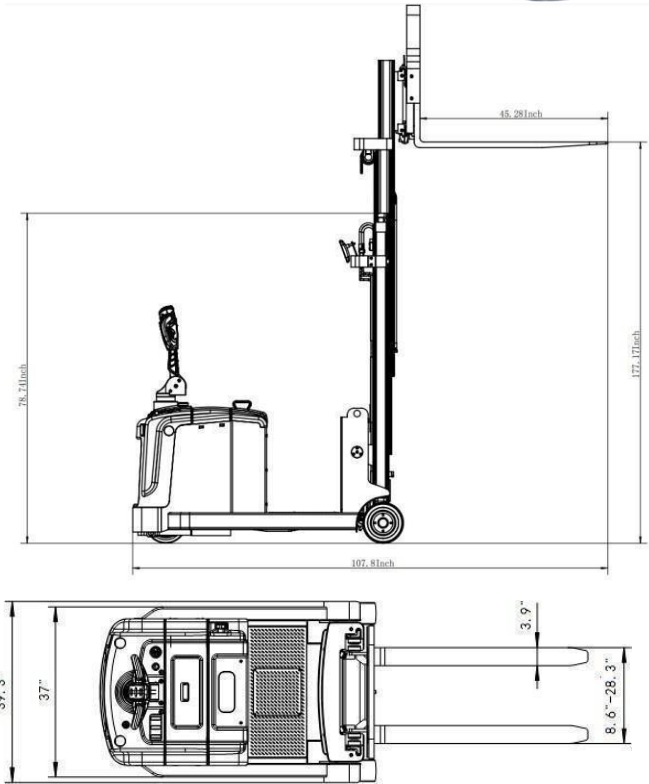


# EK14CS-130Li Counterbalanced Stacker

The EKKO EK14CS-130Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 130" (10.83ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 42"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Construction
- Robotic Welding
- 3 Year Limited Warranty

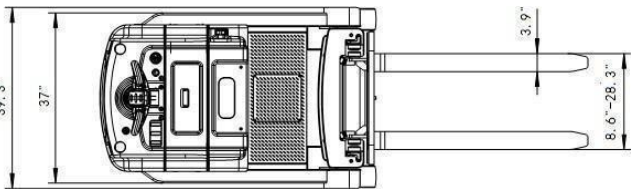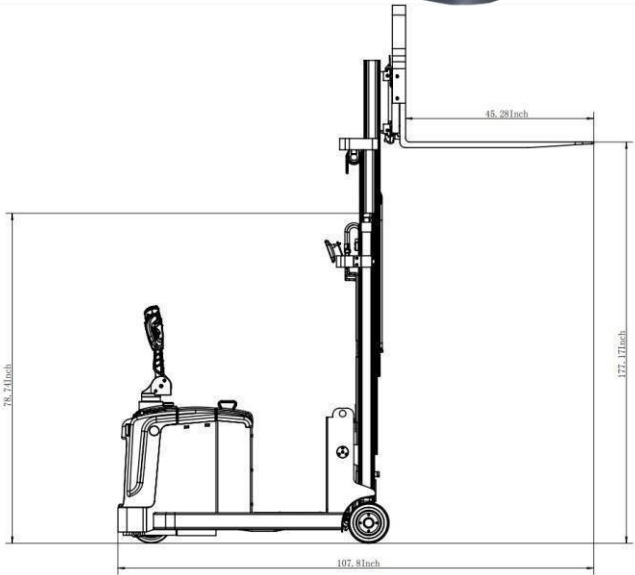

Model		EK14CS-130Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3000
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	130
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4330

# EK14CS-189Li Counterbalanced Stacker


The EKKO EK14CS-189Li Fully Powered Counterbalanced Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 189" (15.75ft)
- Side-shift
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 42"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V ZF AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Robotic Welding
- 3 Year Limited Warranty



Model		EK14CS-189Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	2860
Load center distance	(in)	24
Wheelbase	(in)	46.81
Lifting height	(in)	189
Side Shift		3 Way Valve
Lowered mast height	(in)	78.74
Extended mast height	(in)	214.53
Mast Carriage Tilt	( ° )	2/5
Overall length	(in)	107.8
Overall width	(in)	39
Fork size, Thick/Width/Length	(in)	1.4/4/42
Fork adjust width	(in)	8.6-28.3
Turning radius	(in)	56.89
Gradient performance, laden/unladen	(%)	6/8
Lift speed, laden/unladen	(in/s)	3.9/4.7
Lowering speed, laden/unladen	(in/s)	5.3/4.7
Charger	(V/A)	24V/30A
Driving Motor	(V/W)	AC 24V/2500W
Lifting Motor	(V/W)	24V/2500W
EPS Steering Motor	(V/W)	24/200W
Battery voltage	(V/Ah)	24V/210Ah (Side)
Service Weight	(lb.)	4145

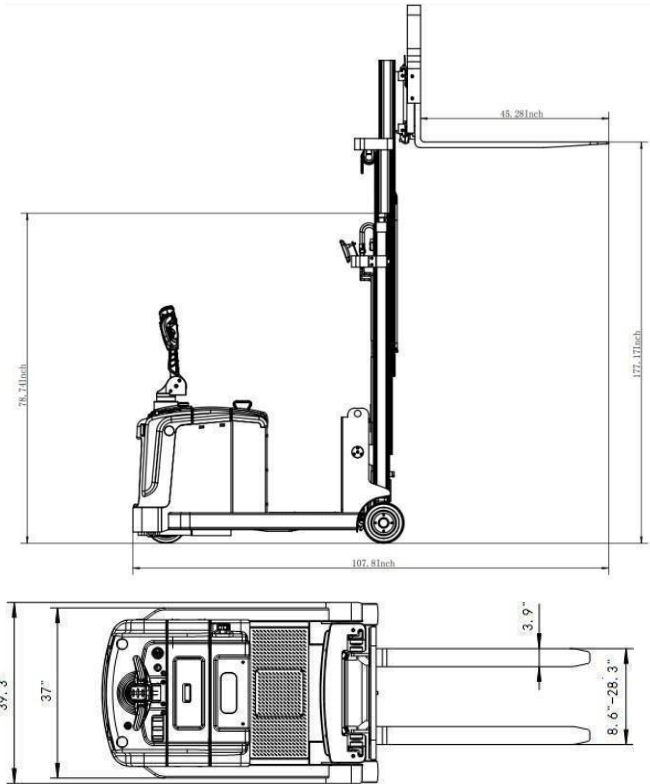



# EK07S Counterbalance Walkie Stacker




Model		EK07S
Lift		Electric
Drive		Electric
Load capacity	(lb.)	1550
Load center distance	(in)	20
Lifting height	(in)	118
Lowered mast height	(in)	81.1
Overall length	(in)	84.7
Overall width	(in)	34.5
Fork size, Thick/Width/Length	(in)	1.4/2.9/42
Fork adjust width	(in)	8.3-25.2
Turning radius	(in)	51
Charger	(V/A)	24V/20A
Driving Motor	(V/W)	AC 24V/750W
Lifting Motor	(V/W)	24V/1500W
Battery voltage	(V/Ah)	24V/120Ah
Service Weight	(lb.)	2175

The EKKO EK07S Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of a forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 1550 lb.
- Raised Height 118" (9.83ft)
- Adjustable Forks 8.3-25.2"
- Fork Length 42"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

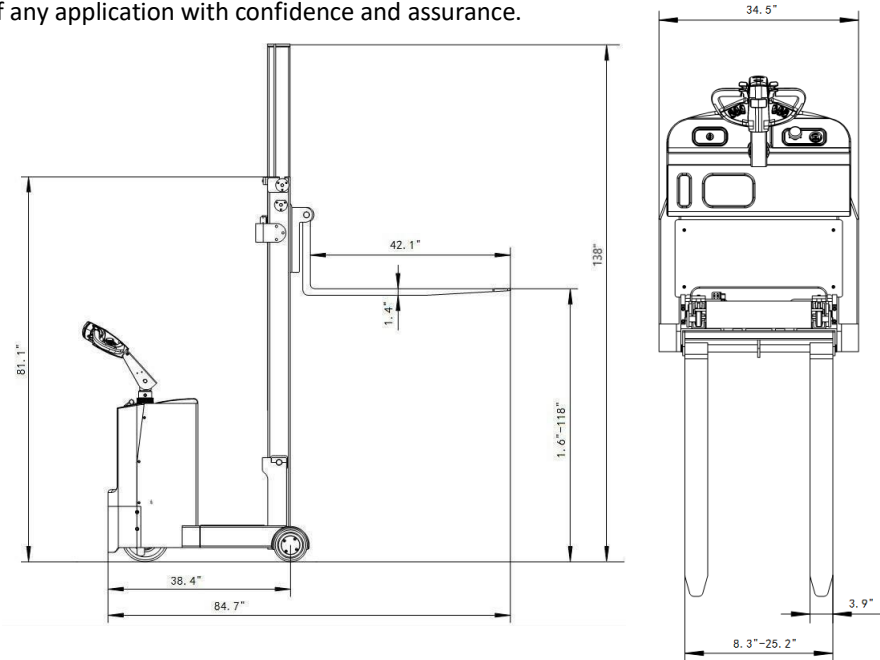


# EB12E Full Powered Walkie Stacker

TheEKKOE12E Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2640lbs.
- Raised Height 119.4"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

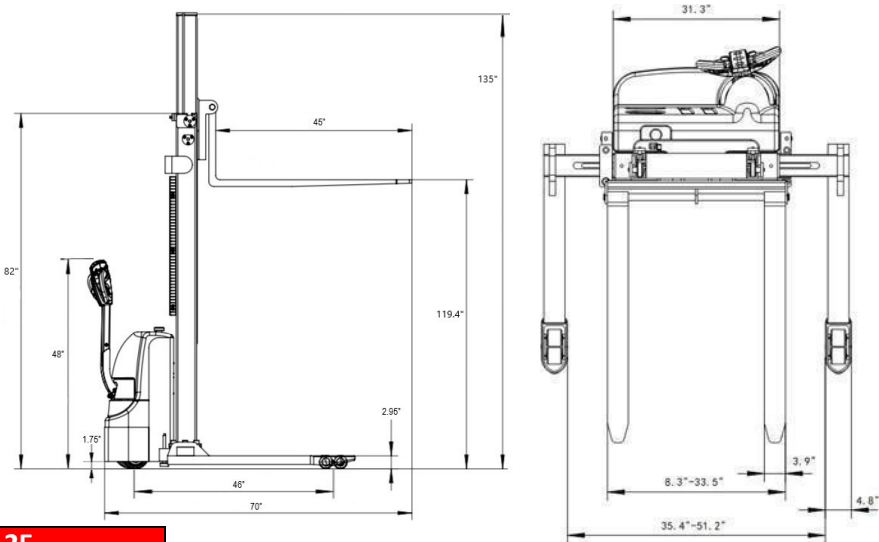


Model		EB12E
Load capacity	(lbs.)	2640
The max. lifting height	(in)	119.4"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	135
Lowered mast height	(in)	82
Battery voltage (dimensions)	(in)	2×12V/100AH (10/6.6/8.5)
Internal Charger	V/A	24V/15A
Lifting Motor	V/Kw	2.2kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor		0.75kw.Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lbs.)	1420

# EB12EA Full Powered Walkie Stacker

TheEKKOEB12EA Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 145.67"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor 1500 Watt
- 24V Lift Motor
- Battery 2\*12V/120Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

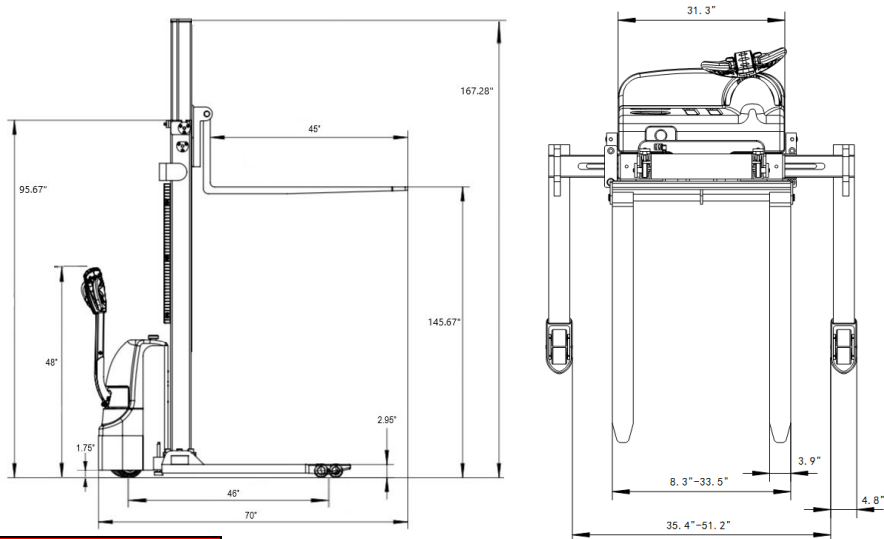


Model		EB12EA
Load capacity	(lb.)	3000
The max. lifting height	(in)	145.67"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167.28
Lowered mast height	(in)	95.67
Battery voltage (dimensions)	(in)	2 × 12V/120AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2200-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen: 4.0/4.2km/h
Service Weight	(lb.)	1584

# EB12E-138 Full Powered Walkie Stacker

The EKKO EB12E-138 Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2640 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

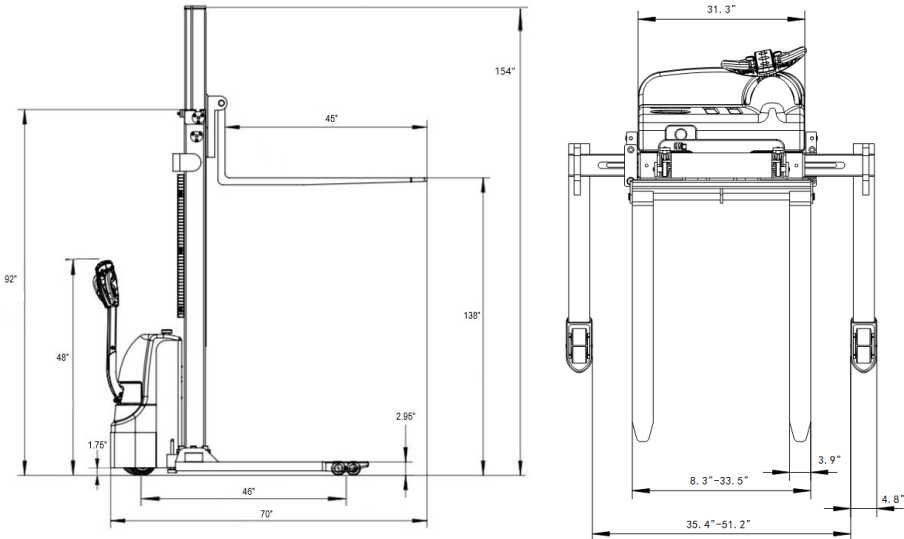

Model		EB12E-138
Load capacity	(lb.)	2640
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	92
Battery voltage (dimensions)	(in)	2 × 12V/100AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2.2kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	0.75kw. Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1450



# EB12E-98Li LITHIUM-IRON Full Powered Walkie Stacker



The combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal” which can get underneath any doorway for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2640lbs.
- Raised Height 98”
- Adjustable Forks 8.3-33.5”
- Adjustable Legs 45.7-59.1”
- Fork Length 45.3”
- Curtis Instrument Controller
- 24V Drive Motor
- 24V Lift Motor
- Battery LI-Iron LiFePO4 24/50Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EB12E-98Li
Load capacity	(lbs.)	2640
The max. lifting height	(in)	98”
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	114
Lowered mast height	(in)	72
Battery voltage (dimensions)	(in)	Li-Iron 24V/50Ah (10/6.6/8.5)
Internal Charger	V/A	24V/15A
Lifting Motor	V/K	2.2kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor		0.75kw. Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lbs.)	1300

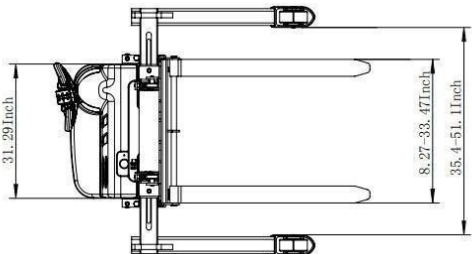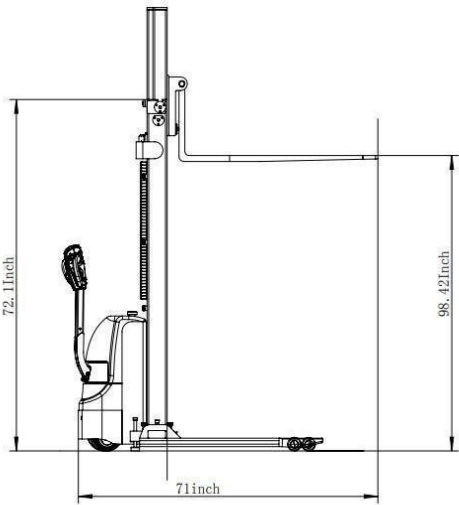




# EB13E Full Powered Walkie Stacker

The EKKO EB13E Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 119"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

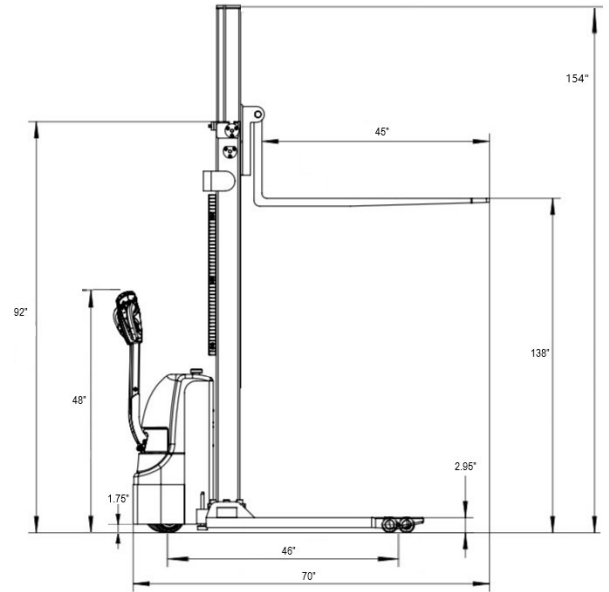


Model		EB13E
Load capacity	(lb.)	2800
The max. lifting height	(in)	119"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	135
Lowered mast height	(in)	82
Battery voltage (dimensions)	(in)	2 × 12V/100AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1450

# EB13E-138 Full Powered Walkie

The EKKO EB13E-138 Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

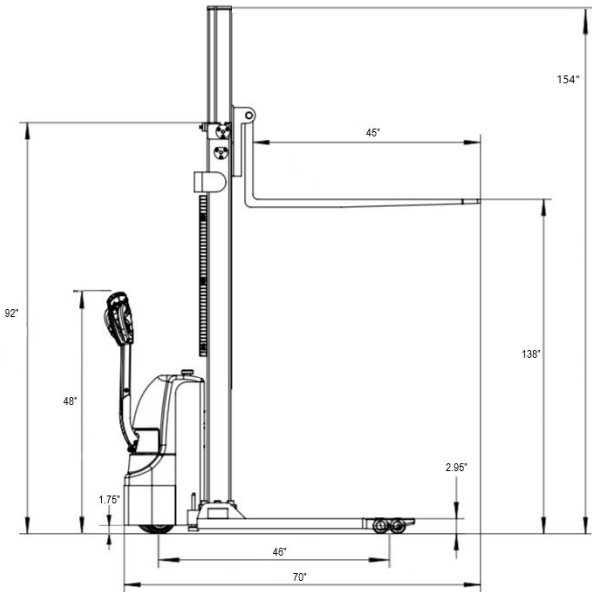


Model		EB13E-138
Load capacity	(lb.)	2800
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	92
Battery voltage (dimensions)	(in)	2 × 12V/100AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1450

# EB13E-Li Full Lithium-Ion Powered Walkie

The EKKO EB13E-Li Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 119"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

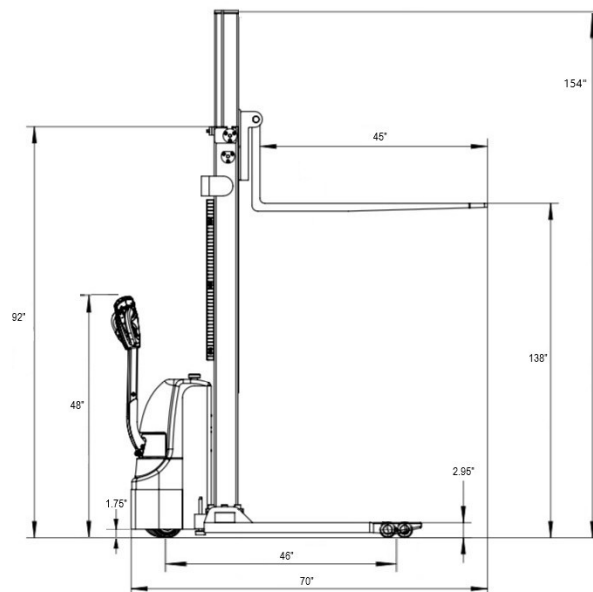


Model		EB13E-Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	119"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	92
Battery voltage (dimensions)	(in)	2 × 12V/100AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1420

# EB13ES-Li Full Lithium-Ion Powered Walkie

The EKKO EB13ES-Li Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 119"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 2\*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

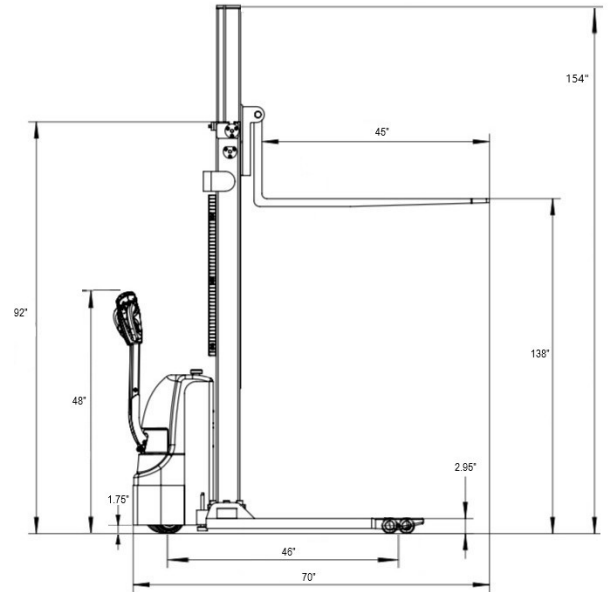

Model		EB13ES-Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	119"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	92
Battery voltage (dimensions)	(in)	2 × 12V/100AH (10/6.6/8.5)
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1450



# EB13E-138Li Lithium-Iron Walkie Stacker

The EKKO EB13-138LI Lithium Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB13E-138Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	92
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1365





# EB13E-145Li Lithium-Iron Walkie Stacker



Model		EB13E-145Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB13E-145Li Lithium Straddle Stacker is designed with the combination of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13ES-145Li Lithium-Iron Walkie Stacker



The EKKO EB13ES-145Li Lithium Straddle Stacker with side-shift is designed with the combination of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- LITHIUM LiFePO4
- 2640 lbs. Capacity
- 145 in. Lift Height
- **Side-Shift**
- Narrow Aisles 7 ft.
- Adjustable Legs 45.5-59.1 in.
- Adjustable Forks 8.3-33.5 in.
- 24V Center Drive Motor
- Curtis Instrument Controller
- Lithium Iron Phosphate Battery & Charger
- Included
- 3 Year Limited Warranty

Model		EB13E-145Li
Load capacity	(lb.)	2640
The max. lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Side-Shift		
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1495



# EB13CD Full Powered Fork Over Stacker



Model		EB13CD
Load capacity	(lb.)	2800
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	992

The EKKO EB13CD Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 118"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13C-118 Full Powered Straddle Stacker



Model		EB13C-118
Load capacity	(lb.)	2800
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1345

The EKKO EB13C-118 Full Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 118"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13C-138 Full Powered Straddle Stacker



Model		EB13C-138
Load capacity	(lb.)	2800
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB13C-138 Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



# EB13C-98Li Lithium-Iron Straddle Stacker



Model		EB13C-98Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	98"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1360

The EKKO EB13C-98Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 98"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13C-118Li Lithium-Iron Powered Straddle Stacker



Model		EB13C-118Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB13C-118Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13C-138Li Lithium-Iron Straddle Stacker



Model		EB13C-138Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB13C-138Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB13C-145Li Lithium-Iron Walkie Stacker



Model		EB13C-145Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB13C-145Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14C Full Powered Straddle Stacker



Model		EB14C
Load capacity	(lb.)	3000
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1520

The EKKO EB14C Full-Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 118"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



# EB14C-138 Full Powered Straddle Stacker



Model		EB14C-138
Load capacity	(lb.)	3000
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB14C-138 Full Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14C-98Li Lithium-Ion Straddle Stacker



Model		EB14C-98Li
Load capacity	(lb.)	3000
The max. lifting height	(in)	98"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1410

The EKKO EB14C-98Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 98"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14C-118Li Lithium-Iron Walkie Stacker



Model		EB14C-118Li
Load capacity	(lb.)	3000
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1430

The EKKO EB14C-118Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 118"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14CS-118Li Lithium-Iron Walkie Stacker



Model		EB14CS-118Li
Load capacity	(lb.)	3000
The max. lifting height	(in)	118"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1520

The EKKO EB14CS-118Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 118"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14C-138Li Lithium-Iron Straddle Stacker



Model		EB14C-138Li
Load capacity	(lb.)	2800
The max. lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1470

The EKKO EB14C-138Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2800 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



# EB14CS-138Li Lithium-Iron Walkie Stacker



Model		EB14CS-138Li
Load capacity	(lb.)	3000
The max. lifting height	(in)	138"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1390

The EKKO EB14CS-138Li Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14C-145Li Lithium-Ion Straddle Stacker



Model		EB14C-145Li
Load capacity	(lb.)	3000
The max lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1800

The EKKO EB14C-145Li Lithium Straddle Stacker is designed with the combination of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB14CS-145Li Lithium-Iron Walkie Stacker



Model		EB14CS-145Li
Load capacity	(lb.)	3000
The max lifting height	(in)	145"
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4
Overall fork width	(in)	8.3-33.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	52.6
Overall length	(in)	70
Max Overall width	(in)	61
Extended mast height	(in)	167
Lowered mast height	(in)	95.66
Battery voltage	(V/A)	24V/50AH Lithium
Internal Charger	(V/A)	24V/15A
Lifting Motor	(V/W)	2000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	750 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1800

The EKKO EB14CS-145Li Lithium Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3000 lb.
- Raised Height 145"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Center Drive Motor
- 24V Lift Motor
- Battery 24V/50Ah Lithium
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

# EB16EA Full Powered Walkie



The EKKO EB16EA Electric Straddle Stacker is designed with the combination of the versatility of a forklift, walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 216"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 38.06-51.8"
- Fork Length 45.28"
- Free Lift 76.25"
- EPS (Electric Power Steering)
- Curtis Instrument Controller
- 24V Center AC Drive Motor
- 24V Lift Motor
- Triple Mast
- Battery 24V/210Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EB16EA
Load capacity	(lb.)	4400
The max. lifting height	(in)	216
Load center distance	(in)	24
Free Lift	(in)	76.25
EPS (Elec. Power Steer)		Yes
Fork length	(in)	45.28
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	1.58
Fixed leg length	(in)	42
Adjustable legs	(in)	38.06-51.81
Turning radius	(in)	69.09
Overall length	(in)	81.69
Max width	(in)	46.93-60.71
Extended mast height	(in)	253.15
Lowered mast height	(in)	98.03
Battery voltage	(V/Ah)	24/210Ah
Charger	(V/A)	24V/30A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:95/160m/s Lowering speed, laden/unladen:130/110mm/s
AC Driving Motor	(W)	3000 Watt, Driving speed: laden/unladen: 5.2/5.5km/h
Service Weight	(lb.)	3542

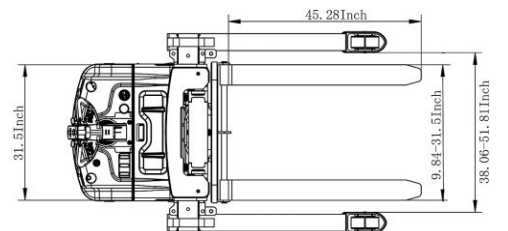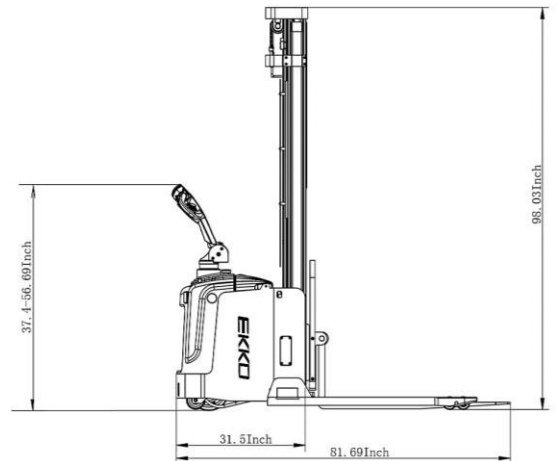

# EB16EAS-189LI Lithium-Iron Walkie Stacker



The EKKO EB16EAS-189LI Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker with SIDE-SHIFTING capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 189"
- Side-Shift
- Adjustable Forks 8.27-31.5"
- Adjustable Legs 38.06-51.8"
- Fork Length 45.3"
- Free Lift 51.85"
- EPS (Electric Power Steering)
- Curtis Instrument Controller
- 24V Center AC Drive Motor
- 24V Lift Motor
- Triple Mast
- Battery 24V/210Ah
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EB16EAS-189LI
Load capacity	(lb.)	4400
The max lifting height	(in)	189
Load center distance	(in)	23.62
Free Lift	(in)	51.85
EPS (Elec. Power Steer)		Yes
Fork length	(in)	45.28
Single fork width	(in)	4.7
Overall fork width	(in)	8.27-31.5
Lowered fork height	(in)	1.57
Fixed leg length	(in)	42
Adjustable legs	(in)	38.06-51.81
Turning radius	(in)	68.5
Overall length	(in)	83.26
Max width	(in)	46.93-60.71
Extended mast height	(in)	227
Lowered mast height	(in)	88.86
Battery voltage	(V/Ah)	24/150Ah Li
Charger	(V/A)	24V/30A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:95/160m/s Lowering speed, laden/unladen:130/110mm/s
AC Driving Motor	(W)	3000 Watt, Driving speed: laden/unladen: 5.2/5.5km/h
Service Weight	(lb.)	3520

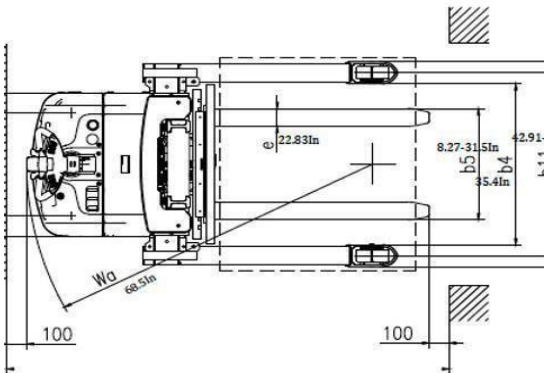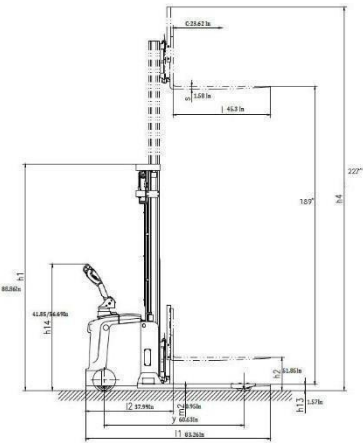



# EB18E Full Powered Walkie





The EKKO EB18E Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 138"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB18E
Load capacity	(lb.)	4000
The max lifting height	(in)	138
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2100

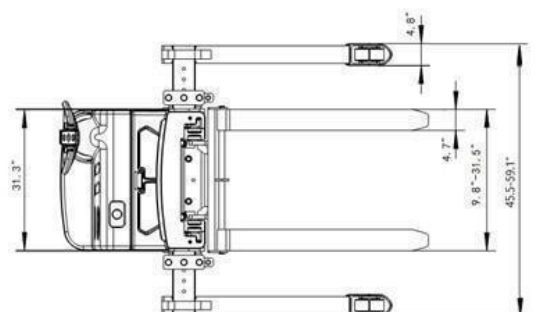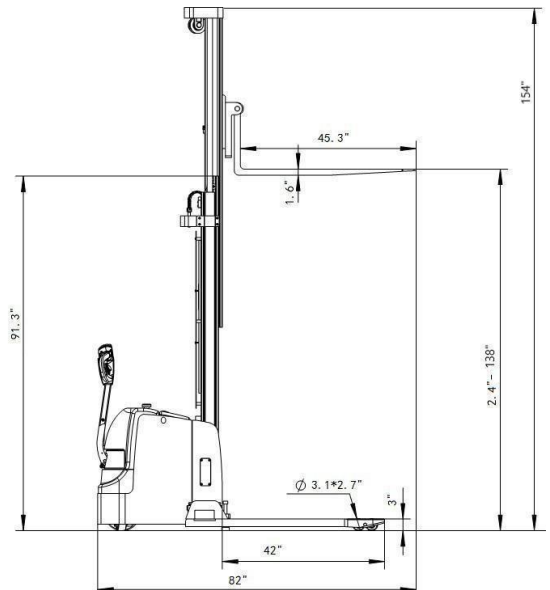

# EB18C-118Li Lithium Ion Powered Straddle Stacker





The EKKO EB18C-118Li Lithium Ion Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 118"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB18C-118Li
Load capacity	(lb.)	4000
The max. lifting height	(in)	118
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2270

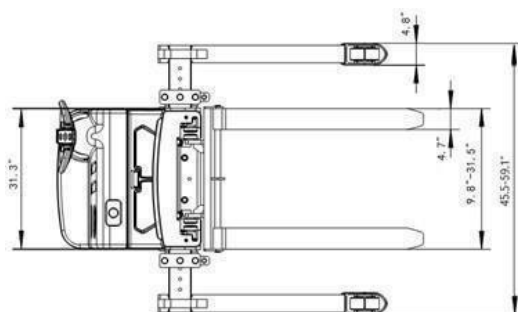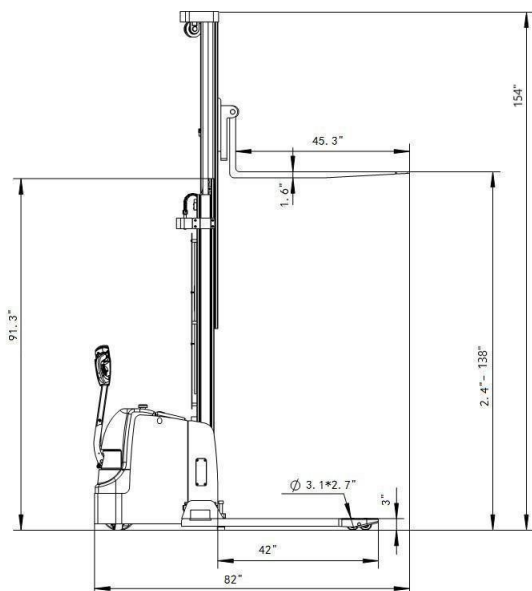

# EB18C-138Li Lithium Ion Powered Straddle Stacker





The EKKO EB18C-138Li Lithium Ion Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 138"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB18C-138Li
Load capacity	(lb.)	4000
The max. lifting height	(in)	138
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2360

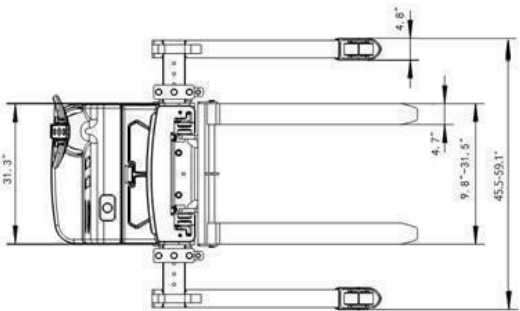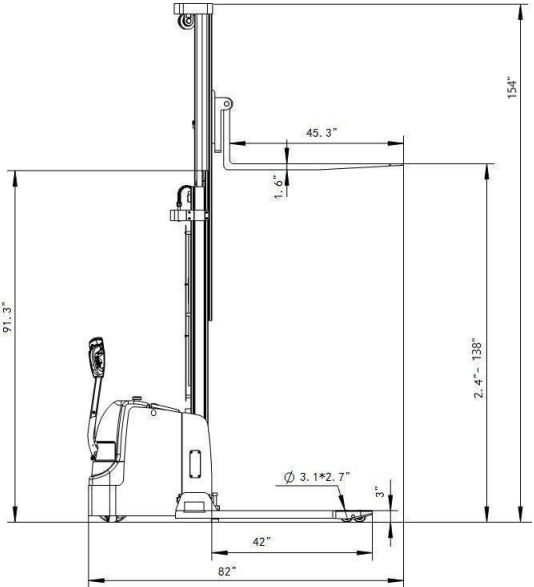

# EB18C-145Li Lithium Ion Powered Straddle Stacker




The EKKO EB18C-145Li Lithium Ion Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Raised Height 145"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB18C-145Li
Load capacity	(lb.)	4000
The max. lifting height	(in)	145
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2380

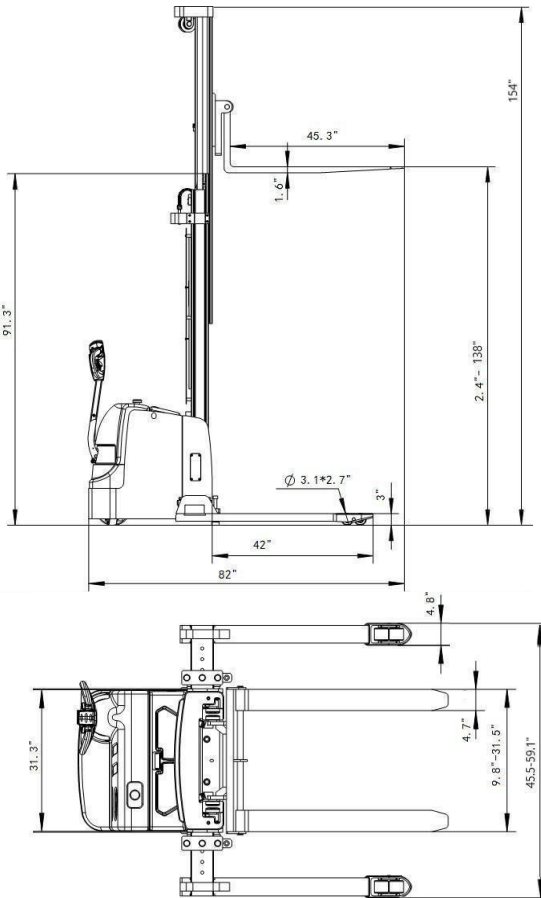

# EB20E Full Powered Walkie


The EKKO EB20E Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stockrooms, rooms, and manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 177"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Triple Mast
- Battery 24V/210Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EB20E
Load capacity	(lb.)	4400
The max. lifting height	(in)	177
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	3
Fixed leg length	(in)	42
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	85
Max width	(in)	61
Extended mast height	(in)	198
Lowered mast height	(in)	85
Battery voltage	(V/Ah)	24/210Ah
The charger	(V/A)	24V/30A
Lifting Motor	(V/W)	3000W, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500W, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2800

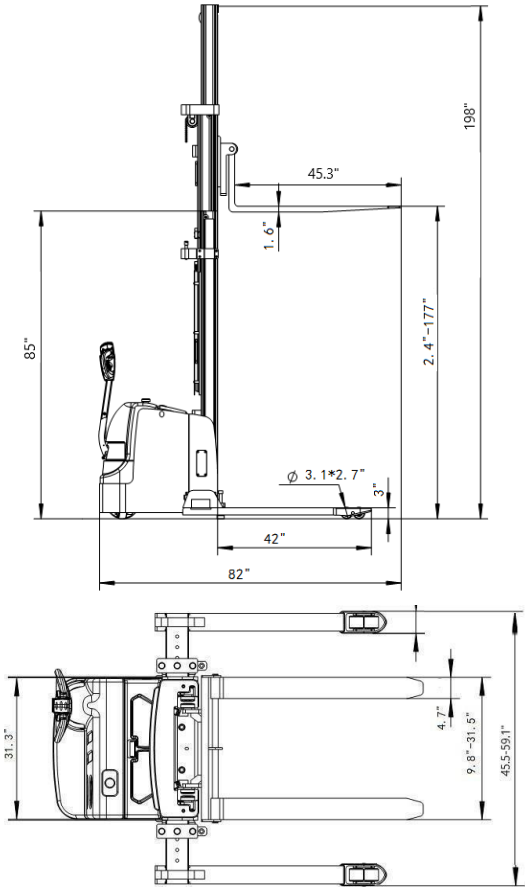



# EB20CS-177Li Lithium Ion Powered Straddle Stacker




The EKKO EB18E Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 177"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB18E
Load capacity	(lb.)	4400
The max. lifting height	(in)	177
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	2970

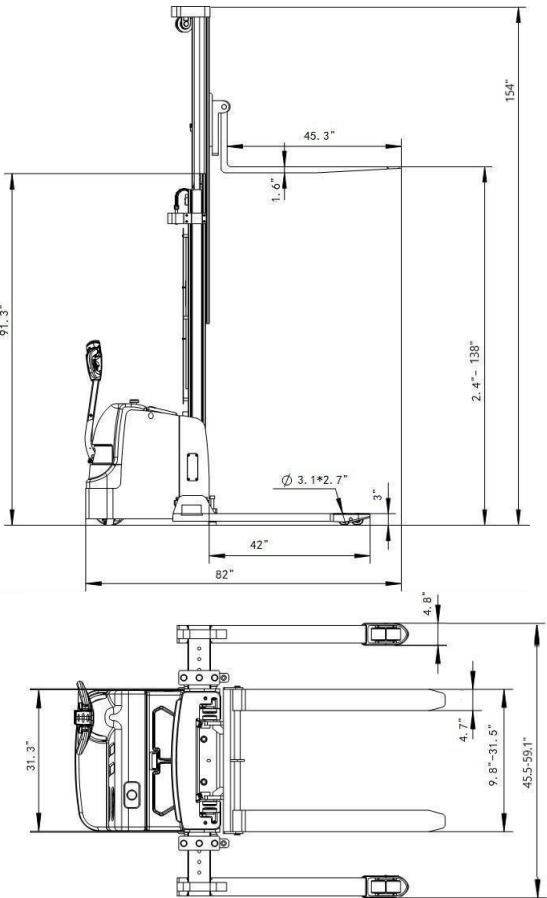

# EB20CS-189Li Lithium Ion Powered Straddle Stacker




The EKKO EB20CS-189Li Lithium Ion Powered Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 189"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB20CS-189Li
Load capacity	(lb.)	4400
The max. lifting height	(in)	189
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	3000

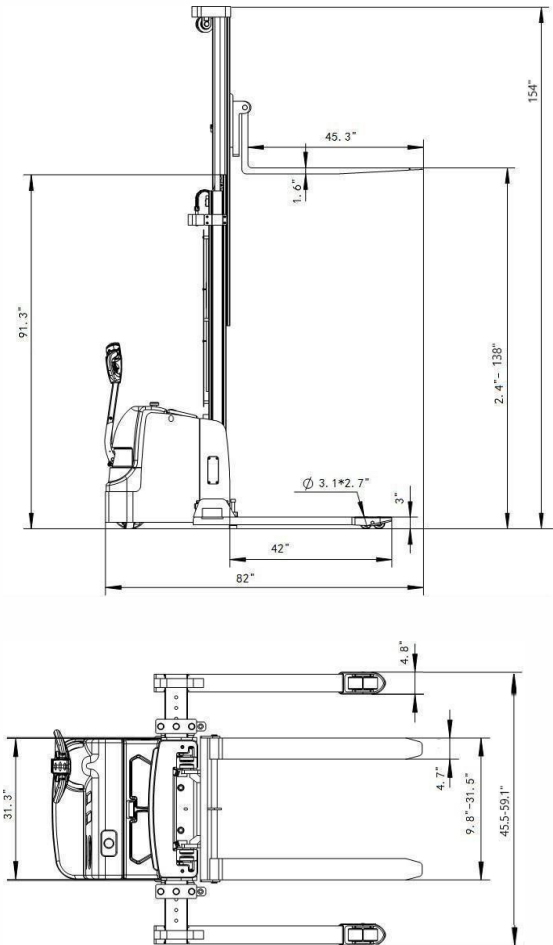

# EB20CS-216Li Lithium-Ion Straddle Stacker




The EKKO EB20CS-216Li Lithium-Ion Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Raised Height 216"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB20CS-216Li
Load capacity	(lb.)	4000
The max lifting height	(in)	216
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	3130

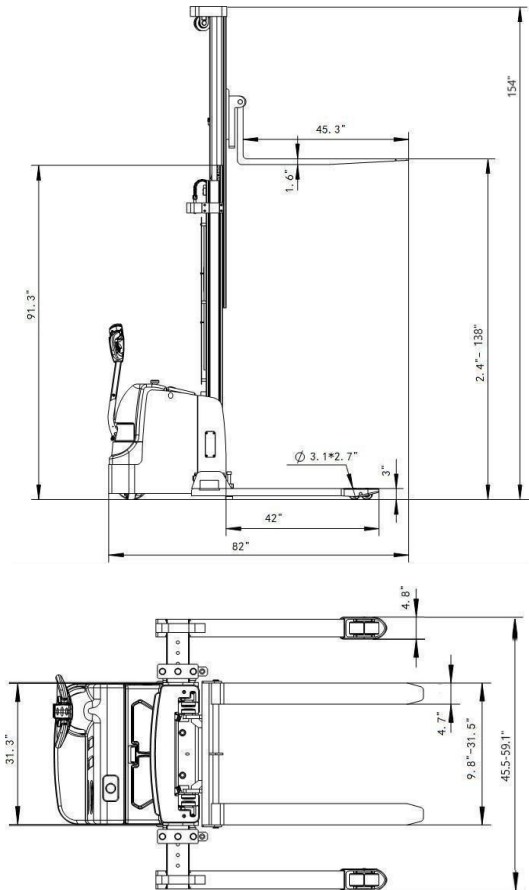

# EA15A Semi-Electric Straddle Stacker




The EKKO EA15A Semi-Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 118"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 12V/120Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB15A
Load capacity	(lb.)	3300
The max lifting height	(in)	118
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	12/120Ah
Charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1212

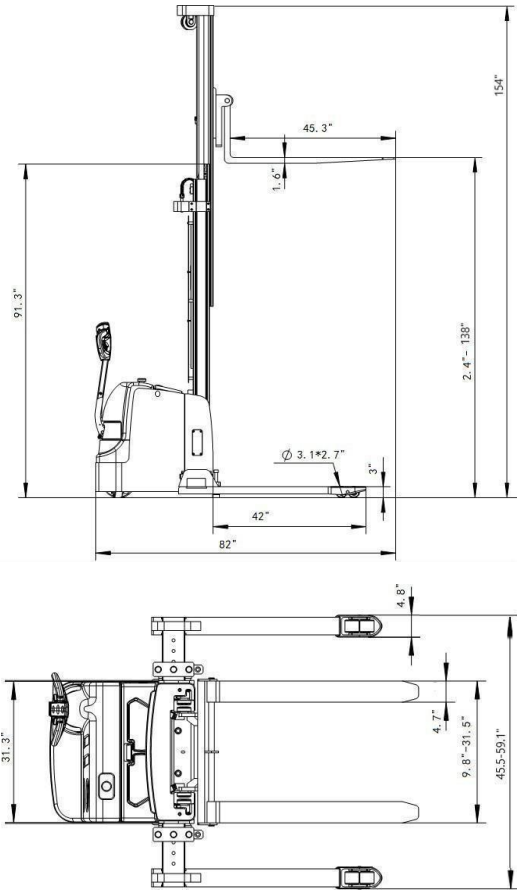

# EA15A-138 Semi-Electric Straddle Stacker




The EKKO EA15A-138 Semi-Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 138"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 12V/120Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EB15A-138
Load capacity	(lb.)	3300
The max lifting height	(in)	138
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	12V/120Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1234

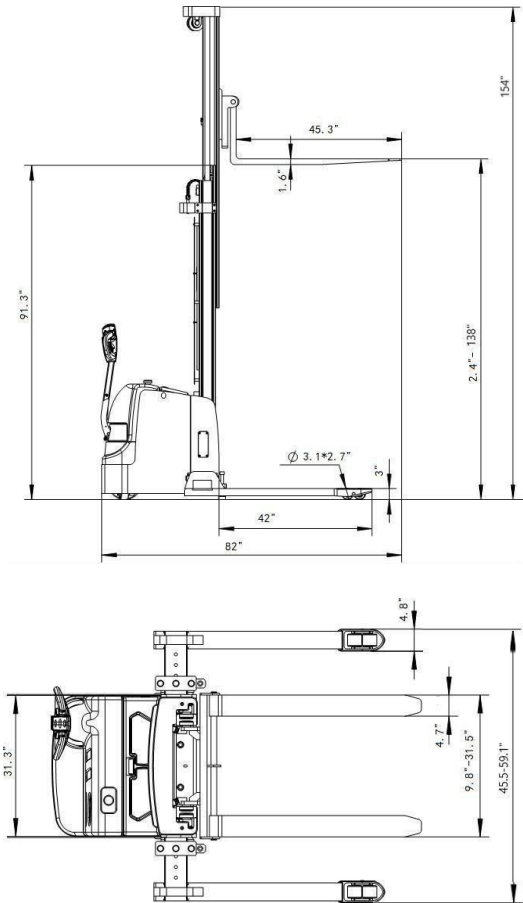



# EA15B Semi-Electric Straddle




Model		EA15B
Load Capacity	(lb.)	3300
Lifting height Max.	(in)	119.4
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	3.9
Overall fork width	(in)	8-33.4
Lowered fork height	(in)	2.4
Fixed leg length	(in)	34
Fixed leg width, single	(in)	3.9
Adjustable legs	(in)	43.5-59.1
Turning radius	(in)	53.2
Overall length	(in)	73
Overall width max	(in)	59
Extended mast height	(in)	140.5
Lowered mast height	(in)	84.5
Battery Voltage	(V/Ah)	12V/120Ah
Charger	(V/A)	12V/15A
Lift Motor	(V/W)	DC 12V/1500W
Service Weight	(lb.)	1200

The EKKO EA15B Semi-Electric Straddle Stacker is designed with the combination of the versatility of a forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 119.4" (9.95ft)
- Adjustable Forks 8.3-33.4"
- Adjustable Legs 43.5-59.1"
- Power Lifting
- Manual Drive
- External Charger 12V/15Ah
- Battery 12V/120Ah
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

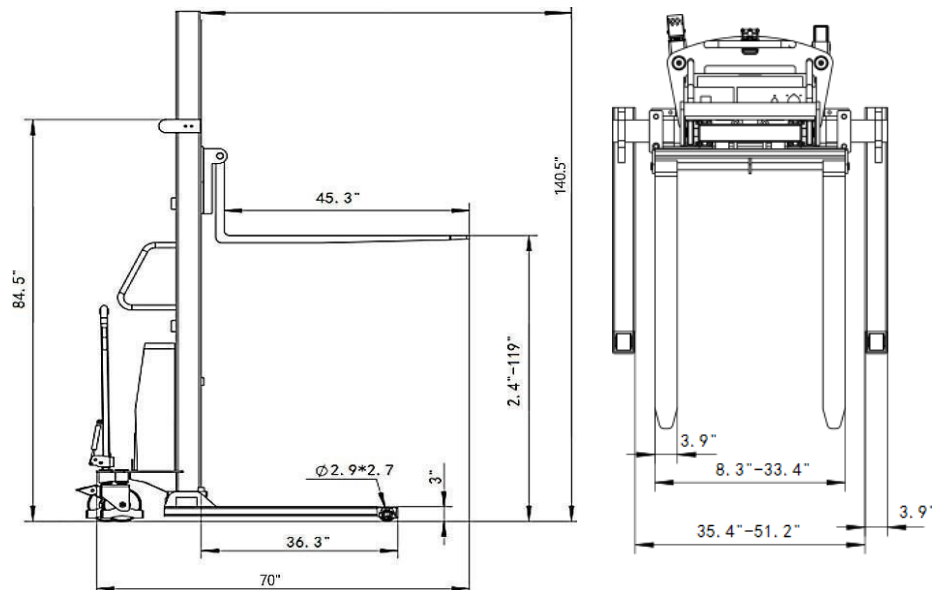

# EA15C Semi-Electric Fork-Over




Model		EA15C
Load Capacity	(lb.)	3300
Lifting height Max.	(in)	119.4
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	5.9
Overall fork width	(in)	24.5
Lowered fork height	(in)	2.4
Fixed leg length	(in)	45.3
Fixed leg width, single	(in)	5.9
Width between legs	(in)	23.2
Turning radius	(in)	53.2
Overall length	(in)	73
Overall width max	(in)	59
Extended mast height	(in)	140.5
Lowered mast height	(in)	81.8
Battery Voltage	(V/Ah)	12V/120Ah
Charger	(V/A)	12V/20A
Lift Motor	(V/W)	DC 12V/1500W
Service Weight	(lb.)	870

The EKKO EA15C Semi-Electric Fork-over Stacker is designed with the combination of the versatility of a forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 119.4" (9.95ft)
- Fork Width between Legs 12.75
- Power Lifting
- Manual Drive
- Internal Charger 12V/20Ah
- Battery 12V/120Ah
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

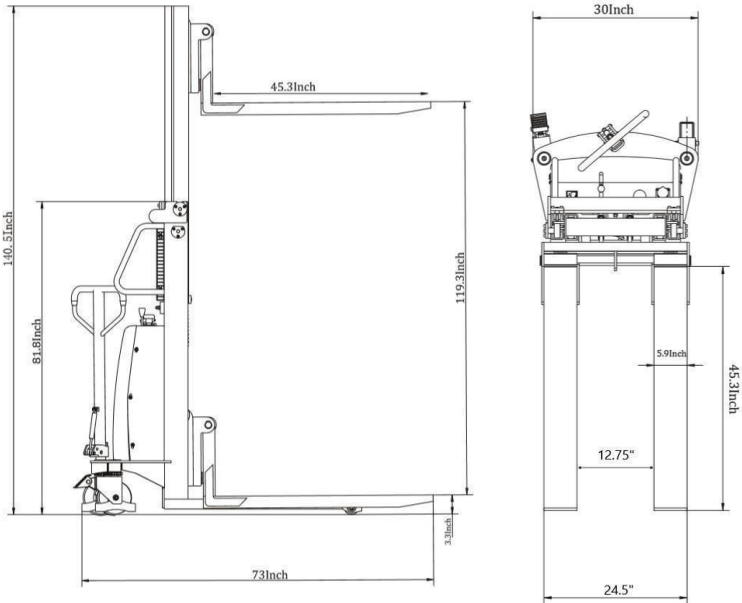

# EA15D Semi-Electric Fork-Over




Model		EA15D
Load Capacity	(lb.)	3300
Lifting height Max.	(in)	138
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	5.9
Overall fork width	(in)	24.5
Lowered fork height	(in)	2.4
Fixed leg length	(in)	45.3
Fixed leg width, single	(in)	5.9
Width between legs	(in)	23.2
Turning radius	(in)	53.2
Overall length	(in)	73
Overall width max	(in)	59
Extended mast height	(in)	140.5
Lowered mast height	(in)	81.8
Battery Voltage	(V/Ah)	12V/120Ah
Charger	(V/A)	12V/20A
Lift Motor	(V/W)	DC 12V/1500W
Service Weight	(lb.)	1450

The EKKO EA15D Semi-Electric Straddle Stacker is designed with the combination of the versatility of a forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 138" (9.95ft)
- Fork Width between Legs 12.75
- Power Lifting
- Manual Drive
- Internal Charger 12V/20Ah
- Battery 12V/120Ah
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

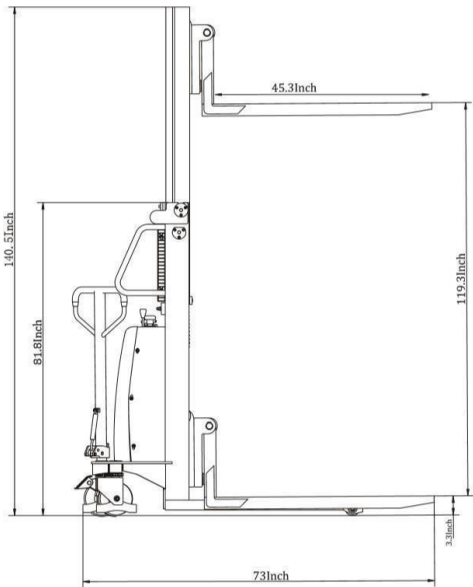

# EA15E Semi-Electric Straddle Stacker




The EKKO EA15E Semi-Electric Straddle Stacker is designed with the combination of the versatility of a forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Raised Height 118"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		EA15E
Load capacity	(lb.)	3300
The max lifting height	(in)	118
Load center distance	(in)	24
Fork length	(in)	45.3
Single fork width	(in)	4.7
Overall fork width	(in)	9.8-31.5
Lowered fork height	(in)	2.35
Fixed leg length	(in)	36.5
Adjustable legs	(in)	45.5-59.1
Turning radius	(in)	60
Overall length	(in)	82
Max width	(in)	61
Extended mast height	(in)	154
Lowered mast height	(in)	91.3
Battery voltage	(V/Ah)	2x12V/160Ah
The charger	(V/A)	24V/20A
Lifting Motor	(W)	3000-Watt, Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s
Driving Motor	(W)	1500 Watt, Driving speed: laden/unladen:4.0/4.2km/h
Service Weight	(lb.)	1212

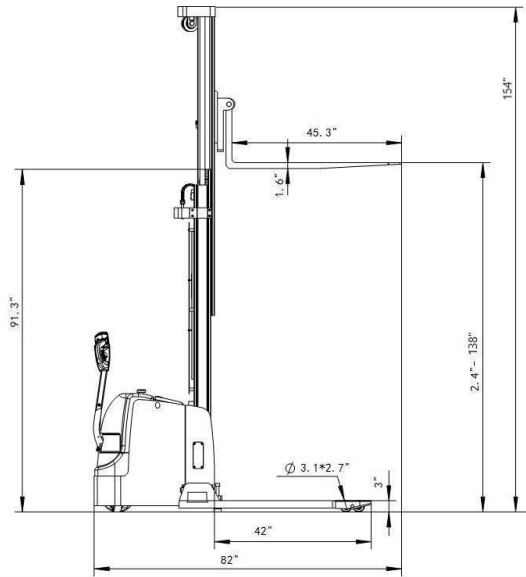

# EKKO EP15SLI LITHIUM-IRON Walkie Pallet Jack


The EKKO EP15SLI Lithium-Iron Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Fork Size 27x48
- Raised Height 7.87"
- 24V/30Ah Li-Iron LiFePO4
- Pinwheel Capability
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP15SLI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/30Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	345

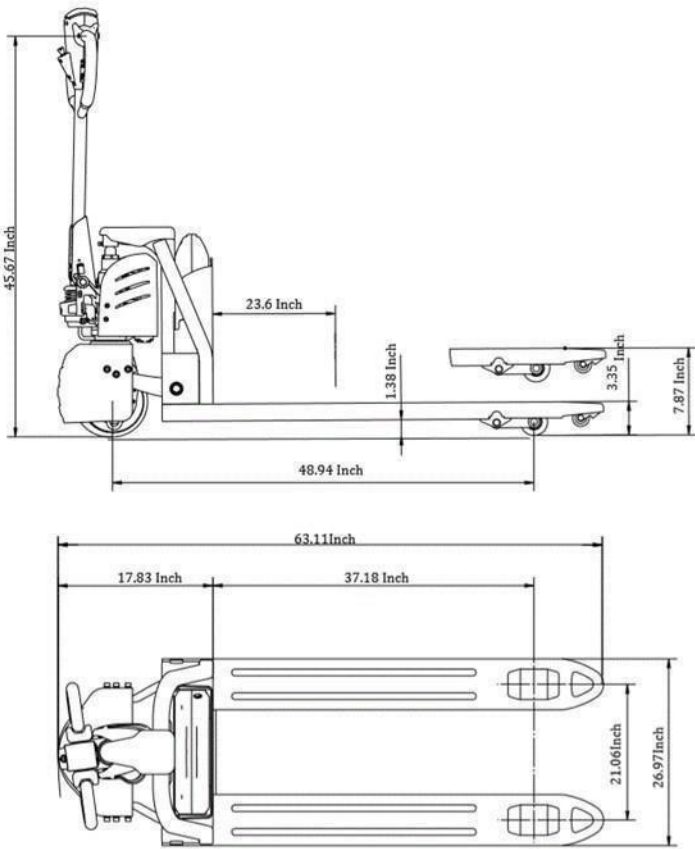





# EKKO EP18SLI LTHIUM-IRON Walkie Pallet Jack

The EKKO EP18SLI Lithium-Iron Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

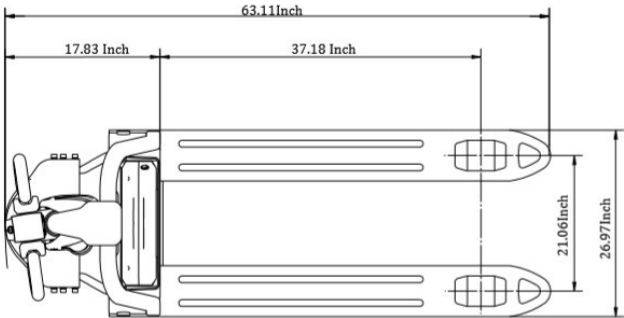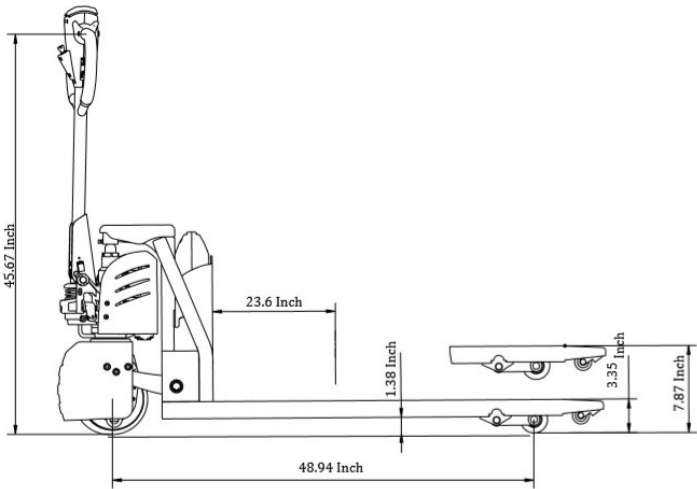

Model		EP18SLI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	345

# EKKO EP18JLI Lithium-Ion Electric Pallet Jack



The EKKO EP18JLI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP18JLI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator sear	(dB(A))	70
Service weight with battery	(lb.)	326

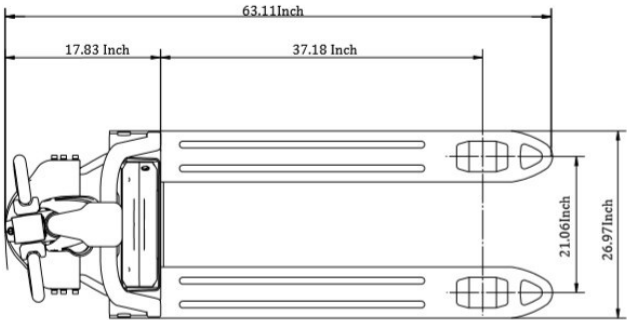
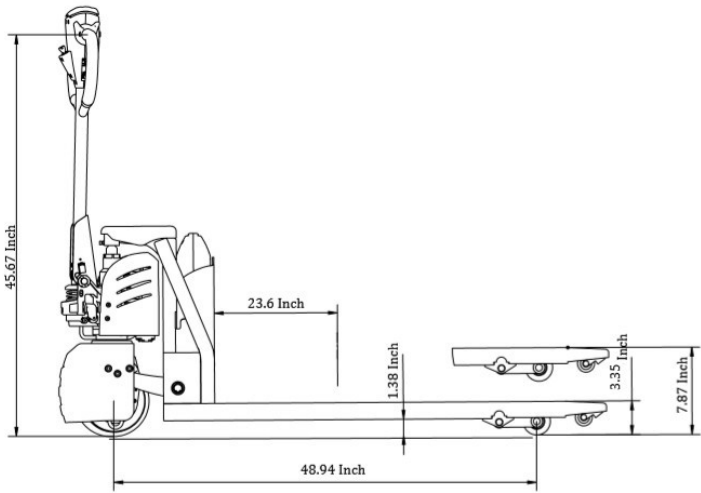


# EKKO EP20JLI Lithium-Ion Electric Pallet Jack

The EKKO EP20JLI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

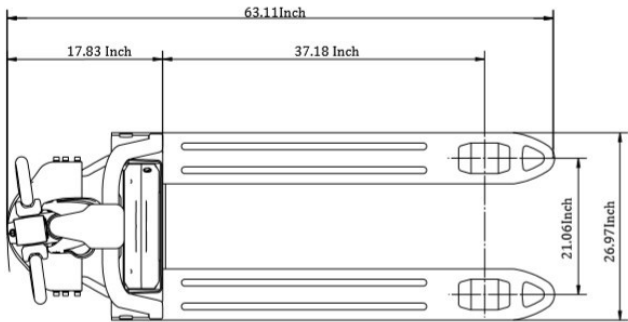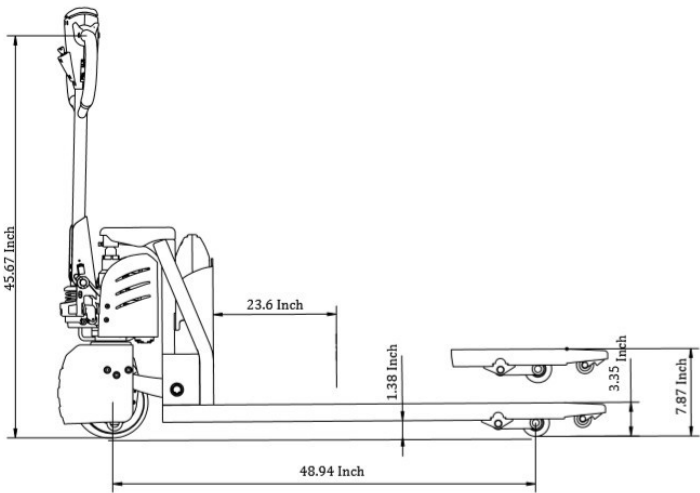

Model		EP20JLI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	326

# EKKO EPF15LI Lithium-Ion Electric Pallet Jack



The EKKO EPF15LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EF15LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	352

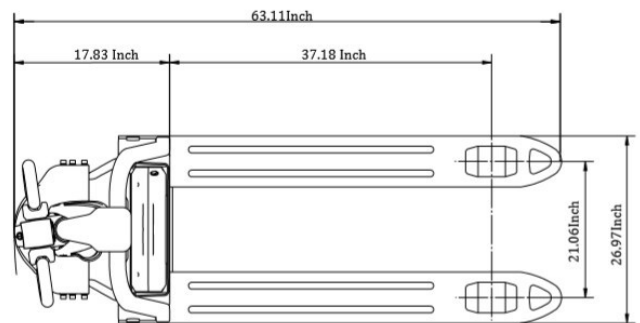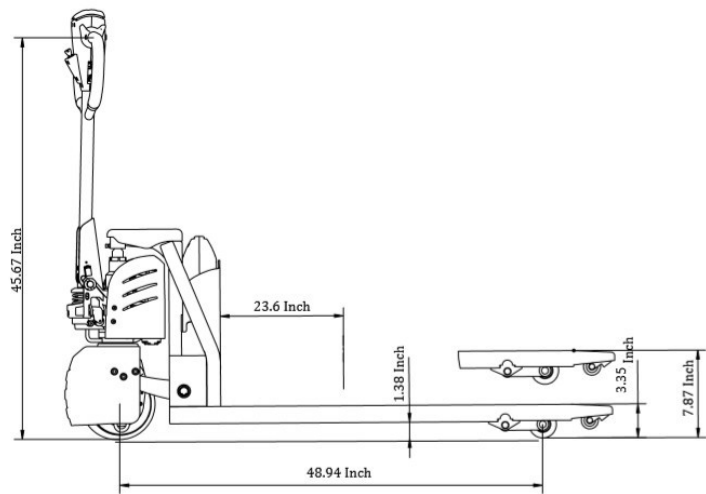

# EKKO EPF18LI Lithium-Ion Electric Pallet Jack


The EKKO EPF18LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPF18LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	375

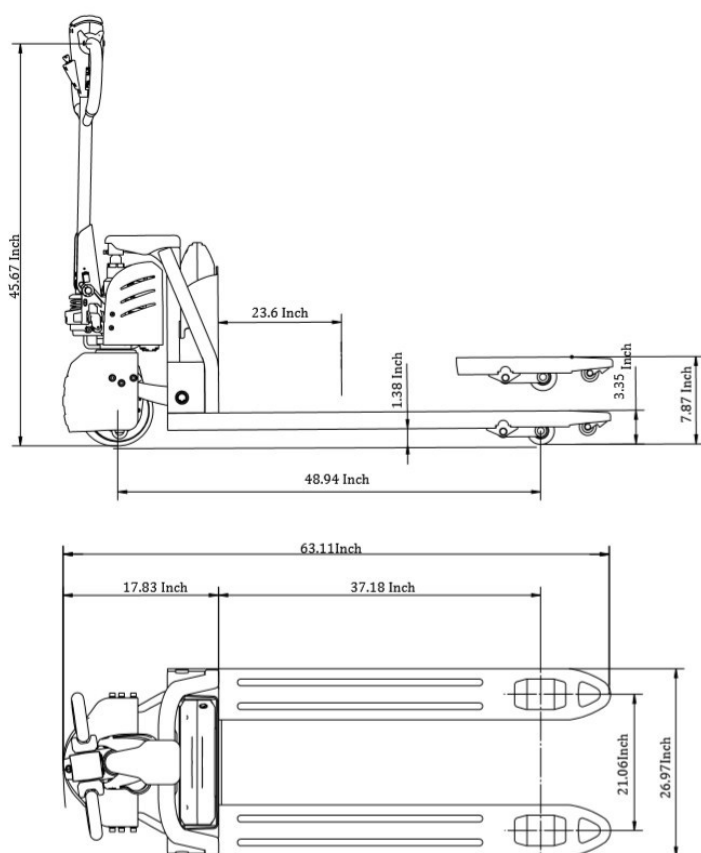





# EKKO EPF20LI Lithium-Ion Electric Pallet Jack

The EKKO EPF20LI Lithium-Iron Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

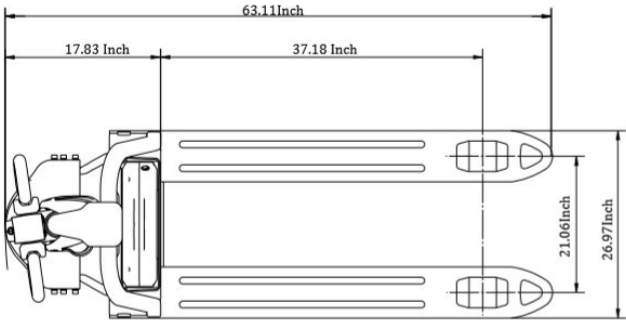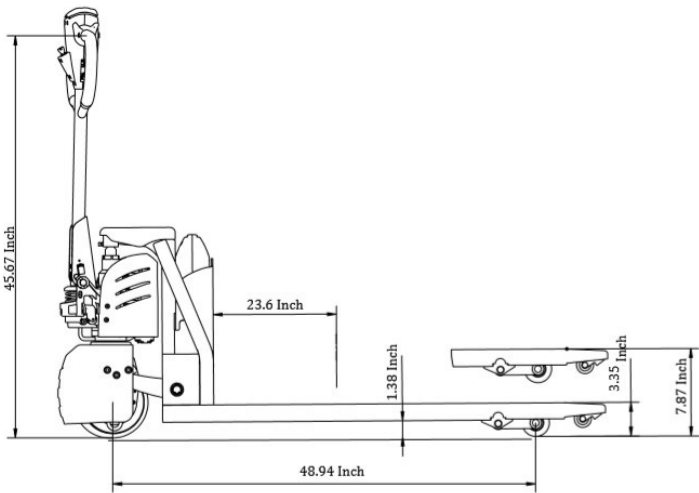

Model		EPF20LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	390

# EKKO EP18JNLI Lithium-Ion Electric Pallet Jack


The EKKO EP18JNLI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP18JNLI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	320


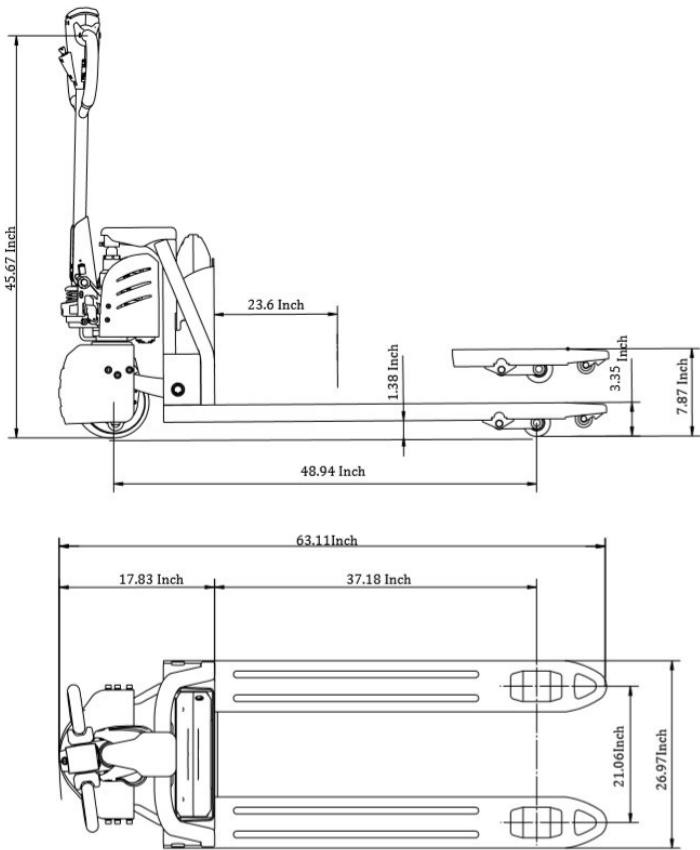


# EKKO EP15JLIC Lithium-Ion Electric Pallet Jack

The EKKO EP15JLIC Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

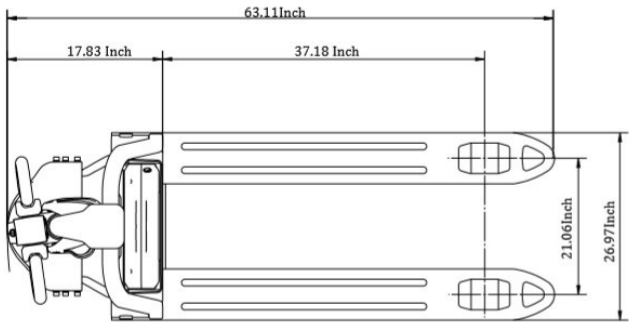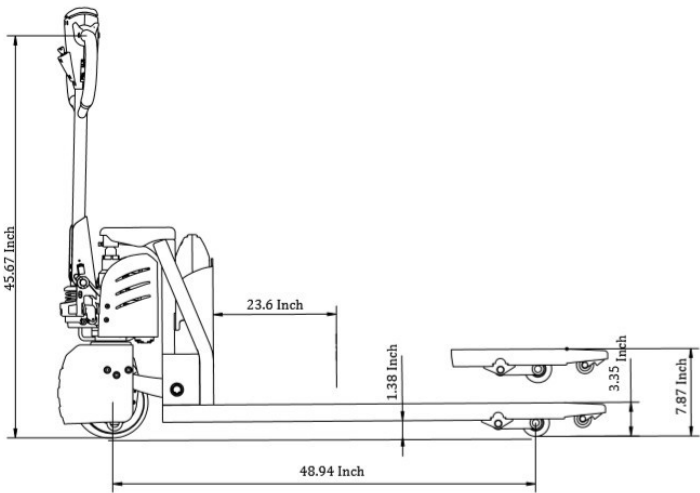

Model		EP15JLIC
Lift		Electric
Drive		Electric
Load capacity	(lb.)	3300
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	308

# EKKO EP18JLIC Lithium-Ion Electric Pallet Jack


The EKKO EP18JLIC Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP18JLIC
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	345

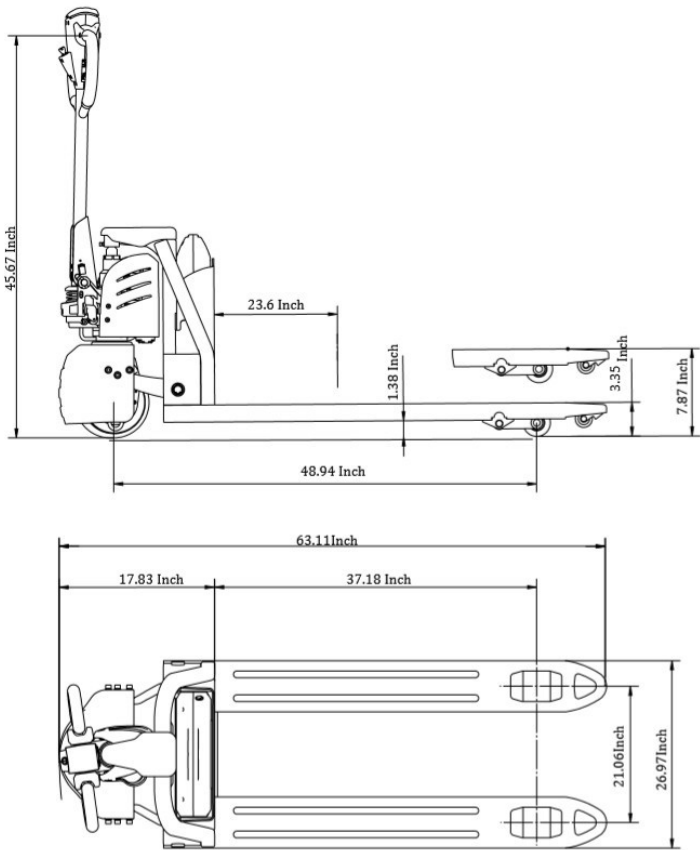

# EKKO EP20JLIC Lithium-Ion Electric Pallet Jack


The EKKO EP20JLIC Lithium-Iron Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP20JLIC
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	462

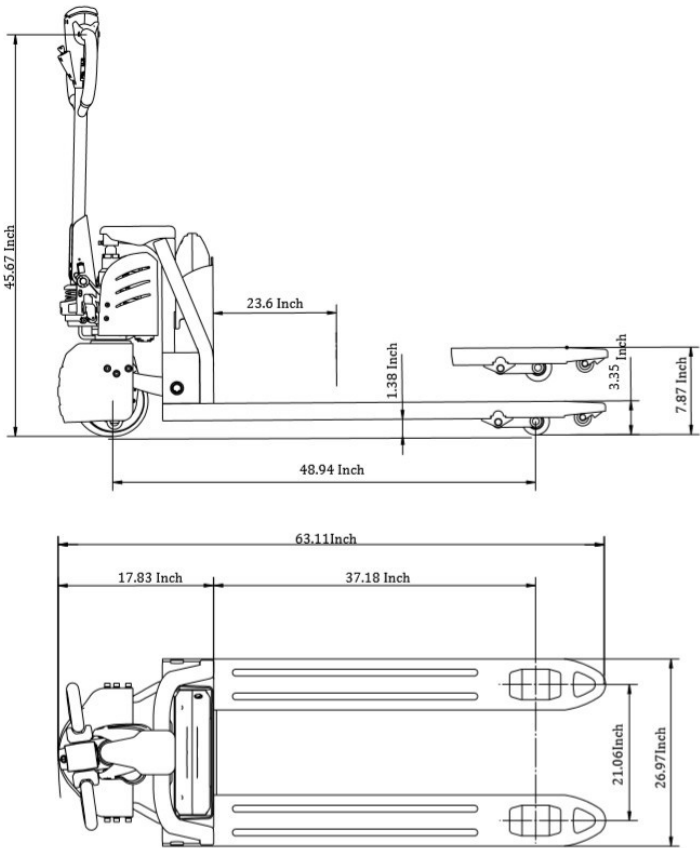



# EKKO EPC18LI Lithium-Ion Electric Pallet Jack


The EKKO EPC18LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPC18LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	N/A

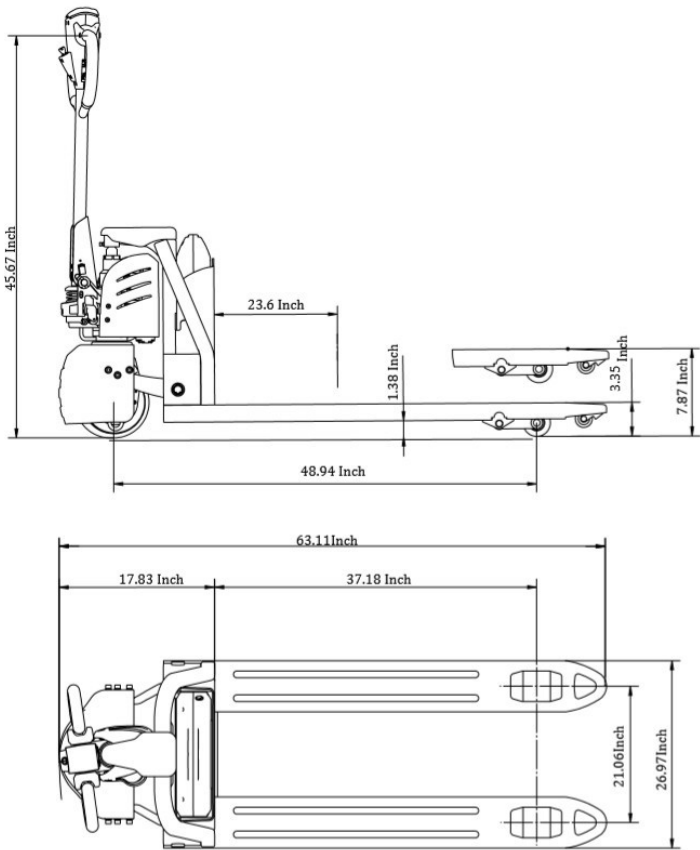

# EKKO EPC20LI Lithium-Ion Electric Pallet Jack


The EKKO EPC20LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPC20LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	N/A

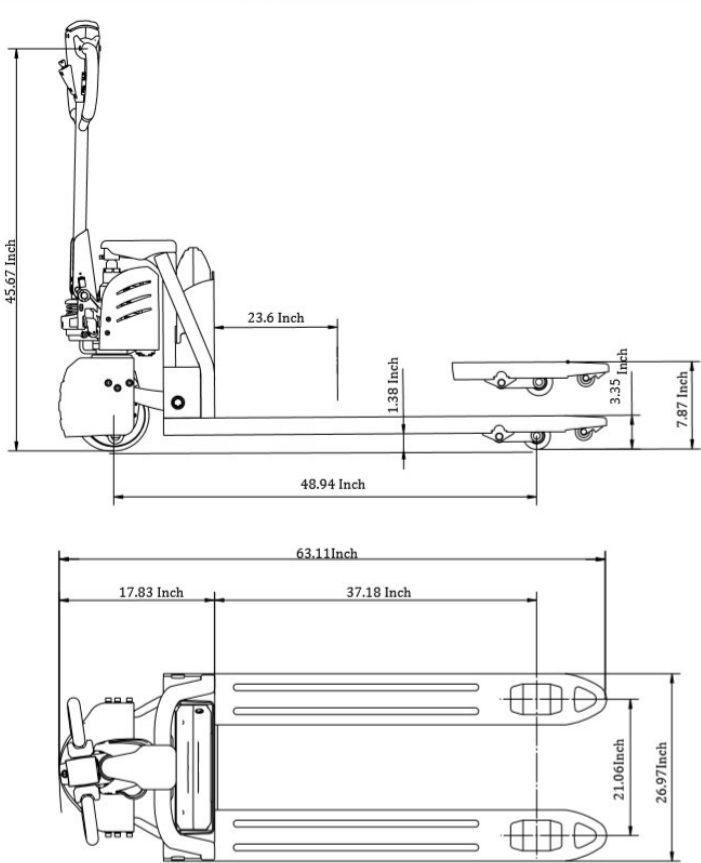

# EKKO EPT18LI Lithium-Ion Electric Pallet Jack


The EKKO EPT18LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPT18LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	N/A

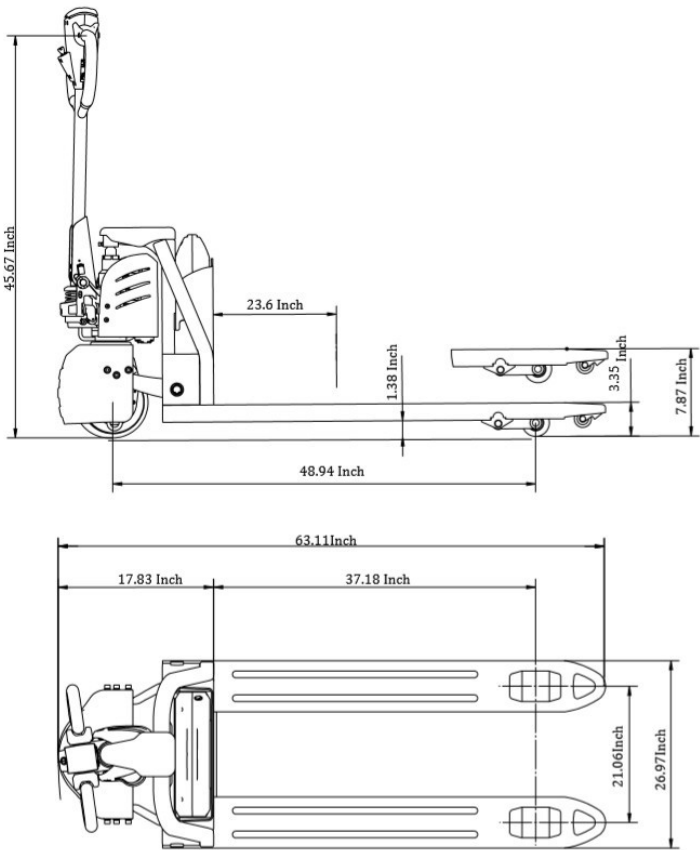

# EKKO EPT20LI Lithium-Ion Electric Pallet Jack


The EKKO EPT20LI Lithium-Ion Electric Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.87"
- Pinwheel Capability
- 24V/40Ah Li-Iron LiFePO4
- Lowered Height 2.95"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPT20LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	23.6
Wheelbase	(in)	51.69
Lowered fork height	(in)	3.35
Lifting height	(in)	7.87
Overall length	(in)	65.86
Overall width	(in)	26.97
Fork size	s/e/l (in)	1.97/5.9/48.03
Outside distance of fork	(in)	26.97
Turning radius	(in)	57.8
Lifting speed, laden/unladen	(in/s)	N/A
Lowering speed, laden/unladen	(in/s)	N/A
Max gradient performance laden/unladen	(%)	5/8
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	800W
Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DC Motor speed control
Noise level at operator seat	(dB(A))	70
Service weight with battery	(lb.)	365

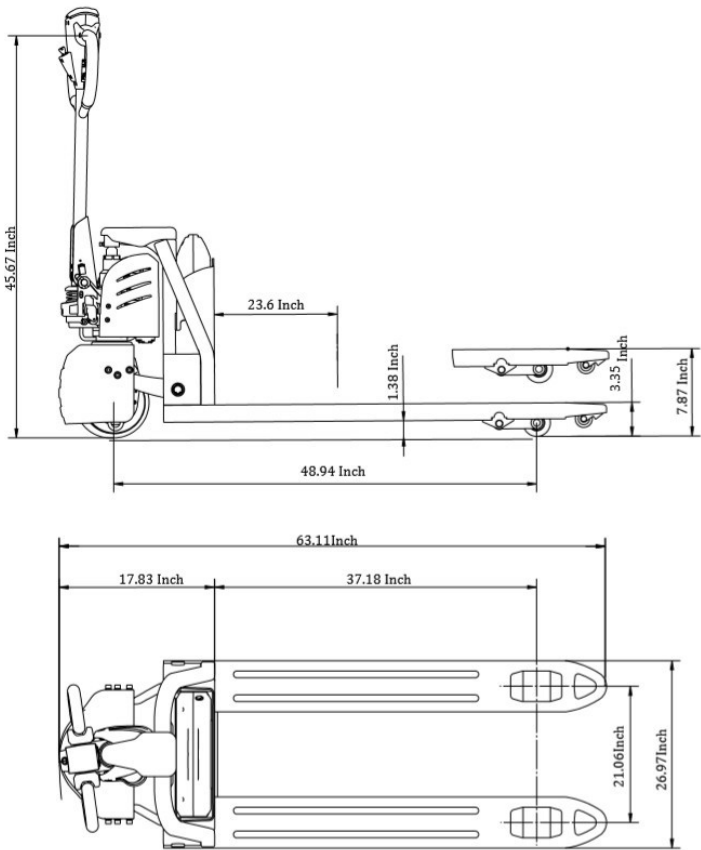


# EKKO EP18LI LITHIUM-IRON Walkie Pallet Jack



The EKKO EP18LI Lithium Iron Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000 lb.
- Fork Size 27x48
- Raised Height 7.7"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Built-in Charger
- 3 Year Limited Warranty

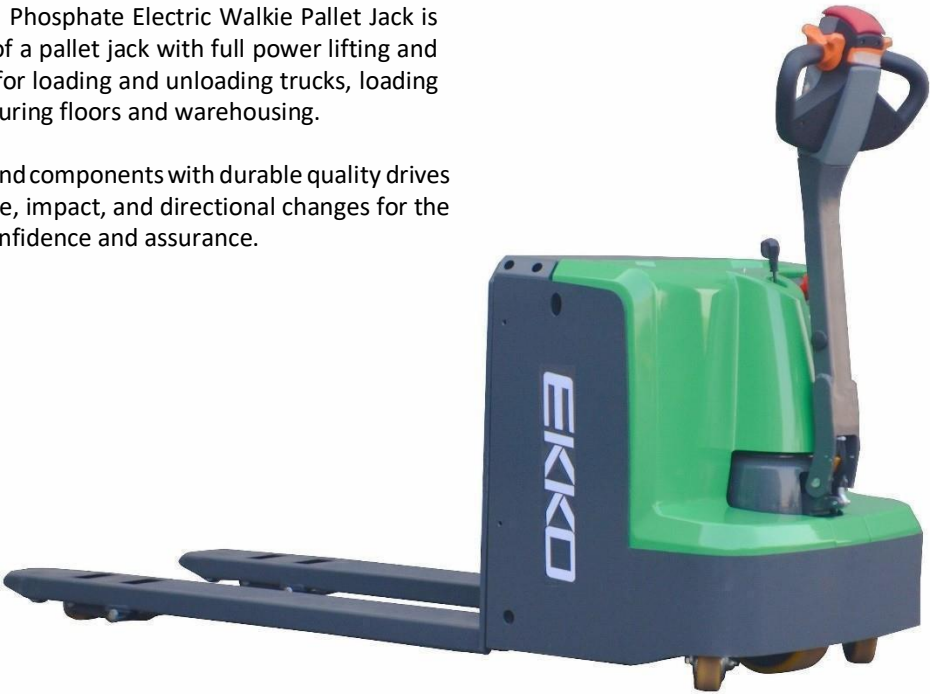

Model		EP18LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4000
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.3
Lifting height	(in)	7.7
Overall length	(in)	67.2
Overall width	(in)	27.5
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	(in)	27
Turning radius	(in)	55
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	80WLITHIUM
Lithium-Iron Battery voltage/rated capacity	(V/Ah)	24V/40Ah Li
DC Drive Motor		DCMotor speed control
Noise level at operator sear	(dB(A))	68
Service weight (with battery)	(lb.)	650

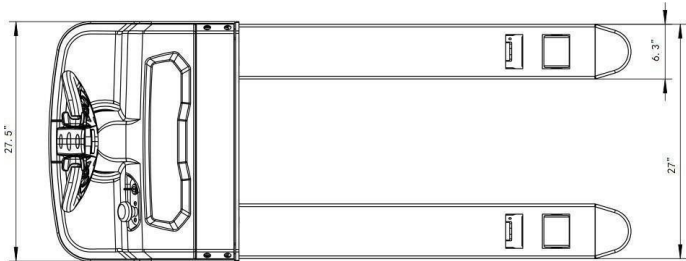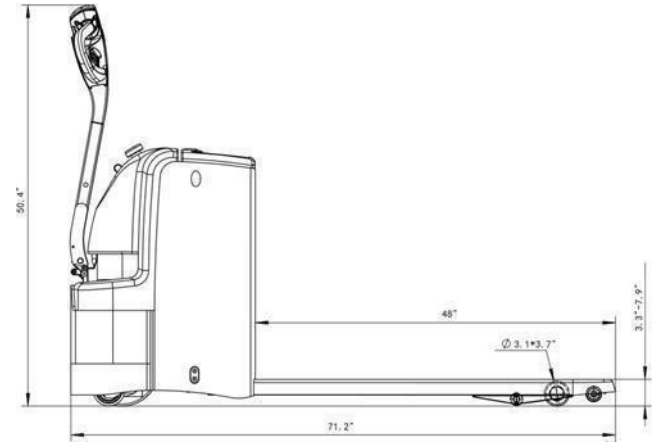




# EKKO EP20LI LITHIUM-IRON


The EKKO EP20LI LITHIUM-IRON Phosphate Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Raised Height 7.7"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Built-in Charger
- 3 Year Limited Warranty

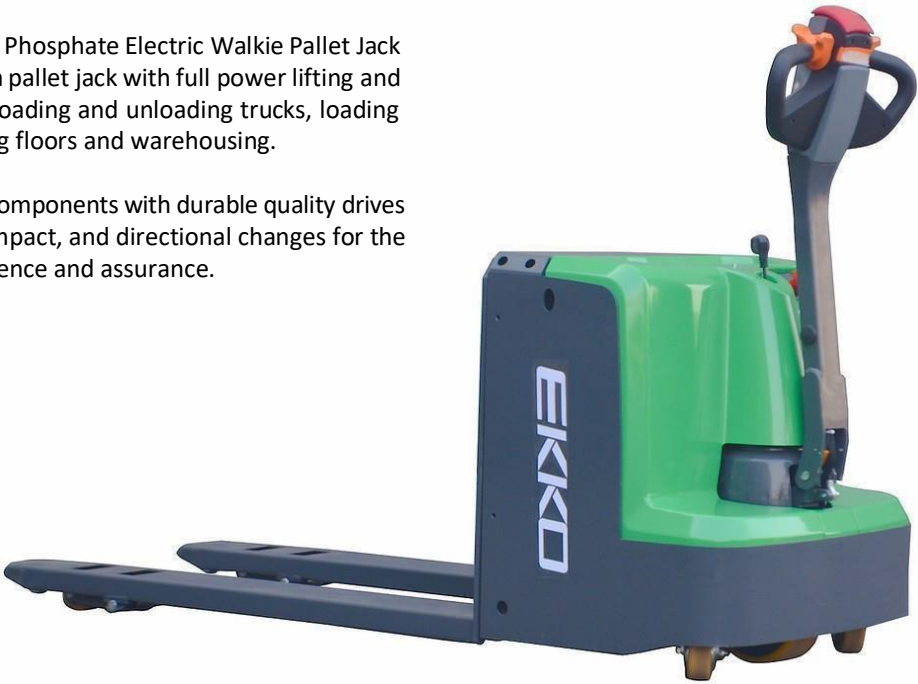

Model		EP20LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.3
Lifting height	(in)	7.7
Overall length	(in)	67.2
Overall width	(in)	27.5
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	(in)	27
Turning radius	(in)	55
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	750W
Lift motor	(W)	80WLITHIUM
Lithium-iron Battery voltage/rated capacity	(V/Ah)	24V/60Ah Li
DC Drive Motor		DCMotor speed control
Noise level at operator seat	(dB(A))	68
Service weigh (with battery)	(lb.)	680

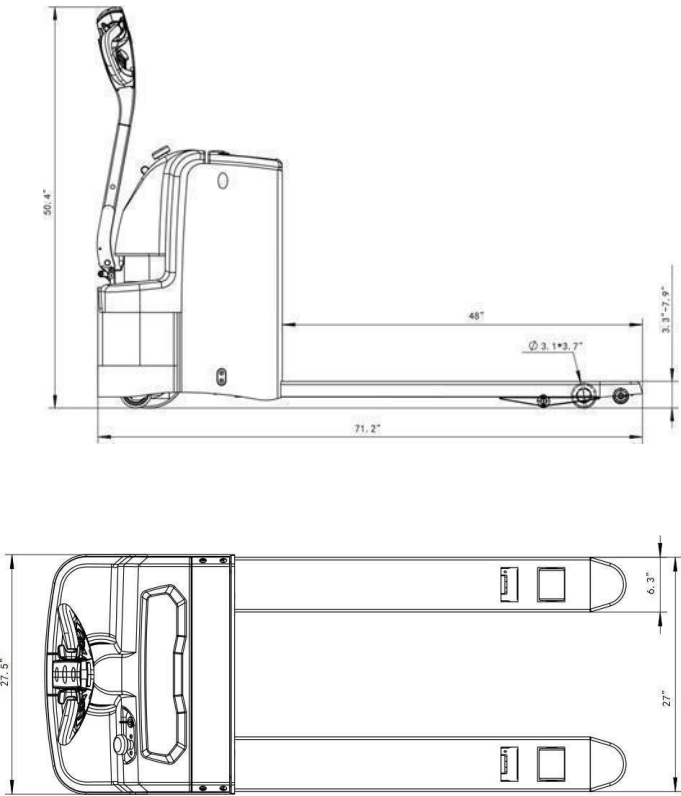


# EKKO EP20E Walkie Pallet Jack

The EKKO EP20E Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

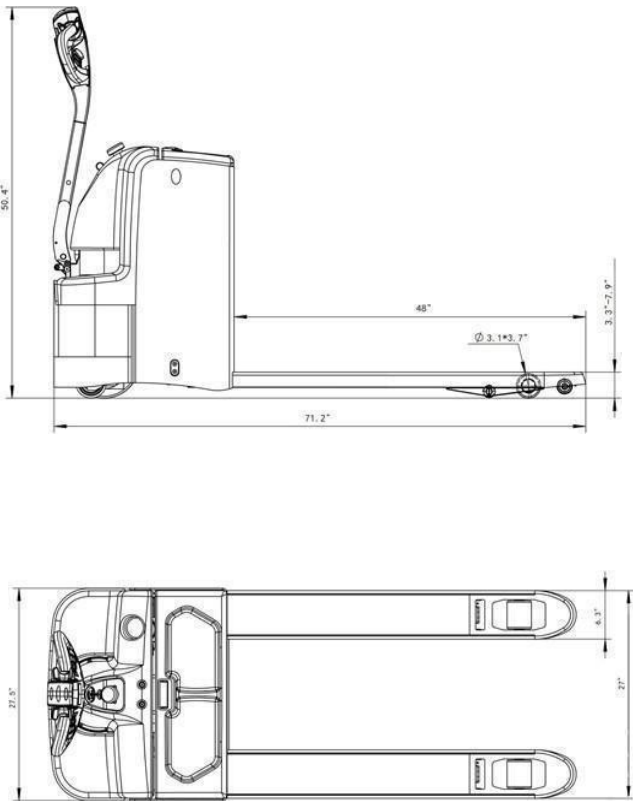

Model		EP20E
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.3
Lifting height	(in)	7.9
Overall length	(in)	71.2
Overall width	(in)	28
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	in	27
Turning radius	(in)	60
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	1300W
Lift motor	(W)	
Charger	(V/A)	24V/15A
Battery voltage/rated capacity	(V/Ah)	24V/160Ah
AC Drive Motor		AC Motor speed control
Noise level at operator seat	(dB(A))	68
Service weight with battery	(lb.)	860

# EKKO EP25E Walkie Pallet



The EKKO EP25E Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5500 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP25E
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5500
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.33
Lifting height	(in)	7.9
Overall length	(in)	71.2
Overall width	(in)	27.5
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	(in)	27
Turning radius	(in)	60
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	1300W
Lift motor	(W)	800W
Charger	(V/A)	24V/30A
Battery voltage/rated capacity	(V/Ah)	24V/240Ah
AC Drive Motor		AC Motor speed control
Noise level at operator seat	(dB(A))	68
Service weight (with battery)	(lb.)	1100

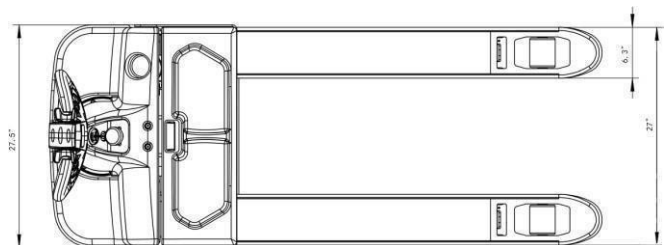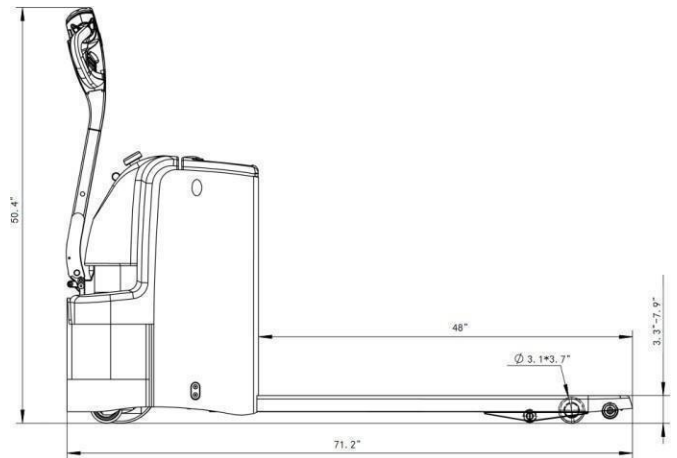


# EKKO EP20E-LI Walkie Pallet Jack

The EKKO EP20E-LI Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

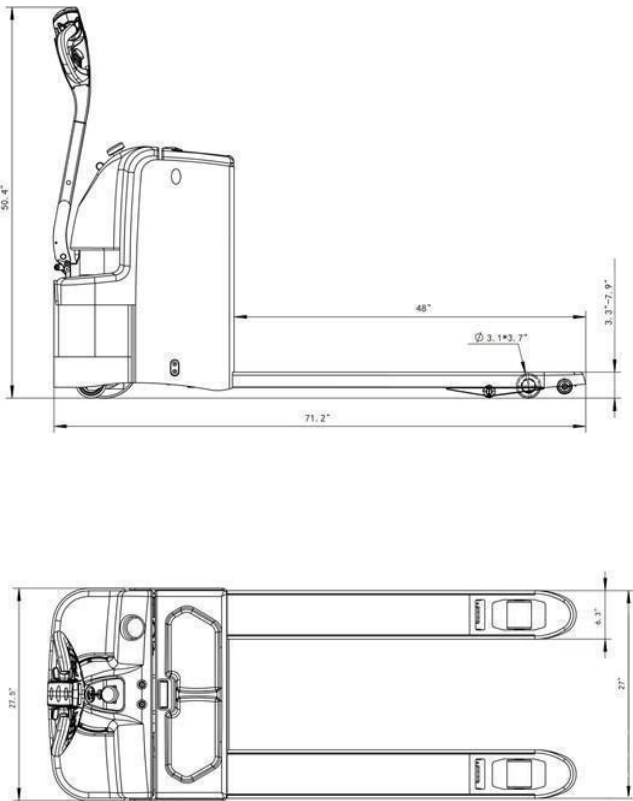


Model		EP20E-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	4400
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.3
Lifting height	(in)	7.9
Overall length	(in)	71.2
Overall width	(in)	28
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	(in)	27
Turning radius	(in)	60
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	1300W
Lift motor	(W)	
Charger	(V/A)	24V/15A
Battery voltage/rated capacity	(V/Ah)	24V/160Ah
AC Drive Motor		AC Motor speed control
Noise level at operator seat	(dB(A))	68
Service weight with battery	(lb.)	755

# EKKO EP25E-LI Walkie Pallet



The EKKO EP25E-LI Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5500 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

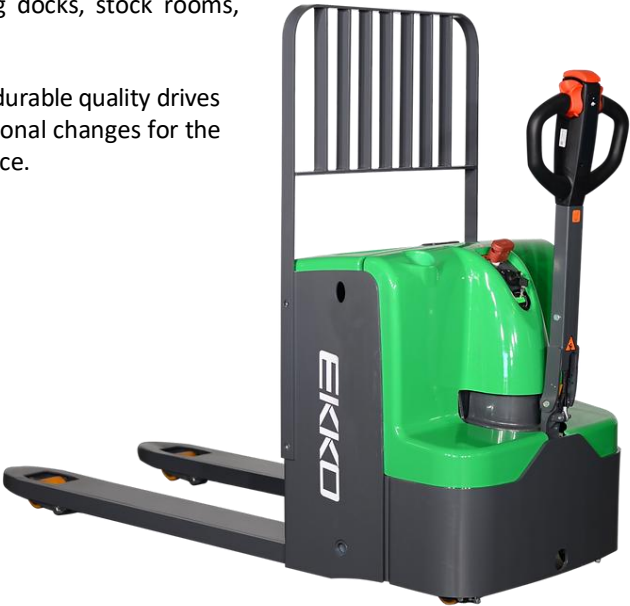

Model		EP25E-LI
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5500
Load center	(in)	24
Wheelbase	(in)	53
Lowered fork height	(in)	3.33
Lifting height	(in)	7.9
Overall length	(in)	71.2
Overall width	(in)	27.5
Fork size	s/e/l (in)	2/6/48
Outside distance of fork	in	27
Turning radius	(in)	60
Lifting speed, laden/unladen	(in/s)	0.8/1.1
Lowering speed, laden/unladen	(in/s)	1.5/1.5
Max gradient performance laden/unladen	(%)	8/15
Brake type		electromagnetic
Drive motor	(W)	1300W
Lift motor	(W)	800W
Charger	(V/A)	24V/30A
Battery voltage/rated capacity	(V/Ah)	24V/240Ah
AC Drive Motor		AC Motor speed control
Noise level at operator seat	(dB(A))	68
Service weight (with battery)	(lb.)	1010

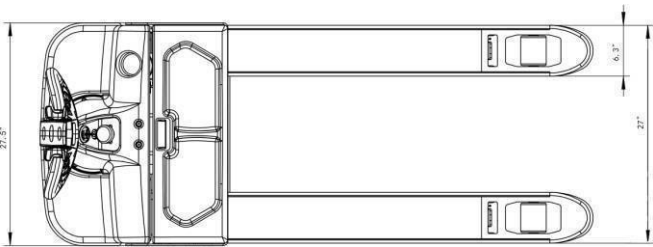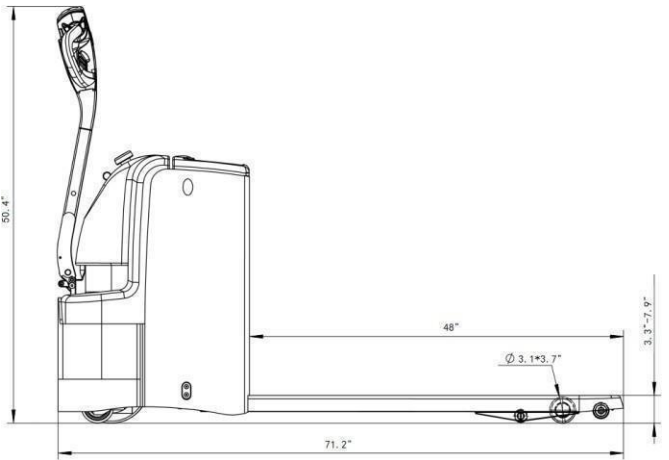



# EKKO EP30A Rider Pallet



The EKKO EP30A Rider Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 6600 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 9.17"
- Lowered Height 3.26"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP30A
Lift		Electric
Drive		Electric
Load capacity	(lb.)	6600
Load center	(in)	24
Wheelbase	(in)	67.72
Lowered fork height	(in)	3.26
Lifting height	(in)	9.17
Overall length	(in)	88.58
Overall width	(in)	35.83
Fork size	s/e/l (in)	2/9/48
Outside distance of fork	in)	27
Turning radius	(in)	81.34
Lifting speed, laden/unladen	(in/s)	7.5/8
Lowering speed, laden/unladen	(in/s)	36/30
Maxgradient performance laden/unladen	(%)	5/15
Brake type		electromagnetic
Drive motor	(W)	3000
Lift motor	(W)	2200
Charger	(V/A)	N/A
Battery voltage/rated capacity	(V/Ah)	24V/280Ah
AC Drive Motor		AC Motor
Noise level at operator sear	(dB(A))	70
Service weight (with battery)	(lb.)	1720

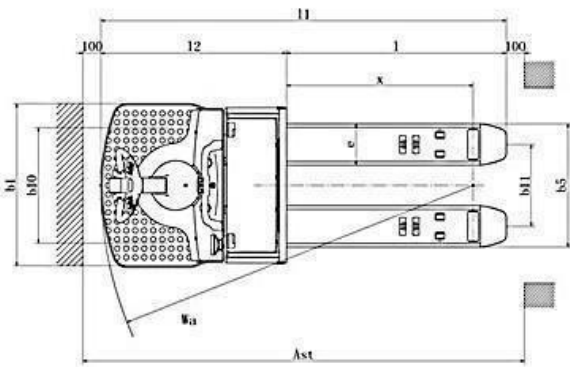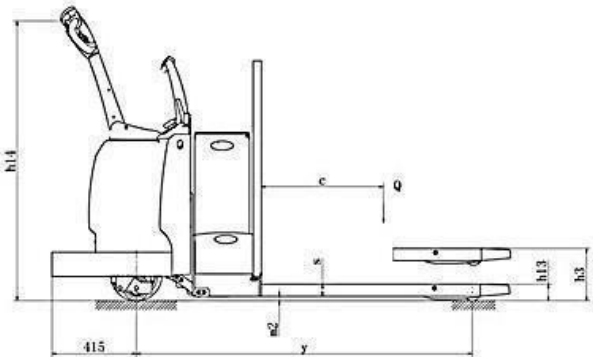

# EKKO EP30A-Li Rider Pallet



The EKKO EP30A-Li Rider Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 6600 lb.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 9.17"
- Lowered Height 3.26"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EP30A-Li
Lift		Electric
Drive		Electric
Load capacity	(lb.)	6600
Load center	(in)	24
Wheelbase	(in)	67.72
Lowered fork height	(in)	3.26
Lifting height	(in)	9.17
Overall length	(in)	88.58
Overall width	(in)	35.83
Fork size	s/e/l (in)	2/9/48
Outside distance of fork	in)	27
Turning radius	(in)	81.34
Lifting speed, laden/unladen	(in/s)	7.5/8
Lowering speed, laden/unladen	(in/s)	36/30
Maxgradient performance laden/unladen	(%)	5/15
Brake type		electromagnetic
Drive motor	(W)	3000
Lift motor	(W)	2200
Charger	(V/A)	N/A
Battery voltage/rated capacity	(V/Ah)	24V/280Ah
AC Drive Motor		AC Motor
Noise level at operator sear	(dB(A))	70
Service weight (with battery)	(lb.)	1720

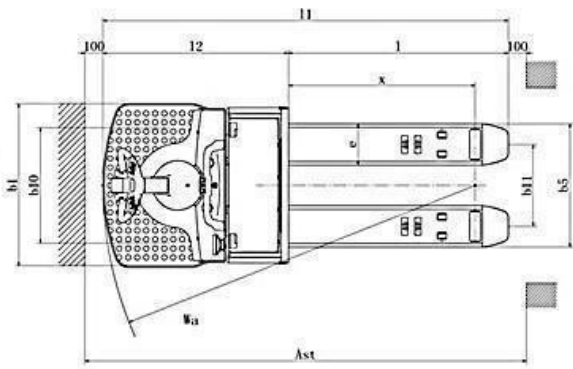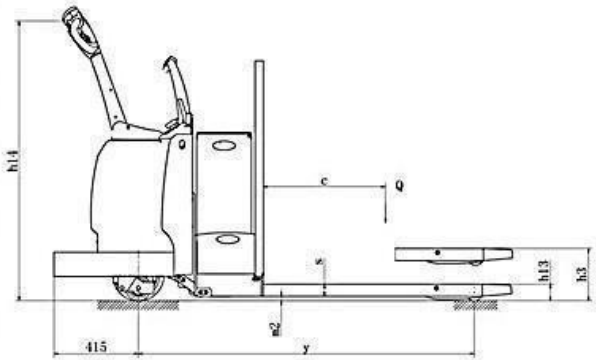

# EKKO EPC30A Center-Controlled Rider Pallet



The EKKO EPC30A Center-Controlled Rider Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for long hauls, loading and unloading trucks, loading docks, stockrooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5000 lb.
- Fork Size 27x45"
- Curtis Instrument Controller
- German AC Drive
- Raised Height 7.88"
- Lowered Height 3.35"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



Model		EPC30A
Lift		Electric
Drive		Electric
Load capacity	(lb.)	5000
Load center	(in)	23.6
Wheelbase	(in)	81.89
Lowered fork height	(in)	3.35
Lifting height	(in)	7.88
Overall length	(in)	99.09
Overall width	(in)	31.81
Fork size	s/e/l (in)	1.97x7.69x45.3
Outside distance of fork	in)	26.97
Turning radius	(in)	89.68
Lifting speed, laden/unladen	(in/s)	.90/.94
Lowering speed, laden/unladen	(in/s)	1.18/.78
Max gradient performance laden/unladen	(%)	3/6
Brake type		electromagnetic
Drive motor	(W)	1500
Lift motor	(W)	800
Charger	(V/A)	N/A
Battery voltage/rated capacity	(V/Ah)	24V/360Ah
AC Drive Motor		AC Motor
Noise level at operator seat	(dB(A))	70
Service weight (with battery)	(lb.)	2400

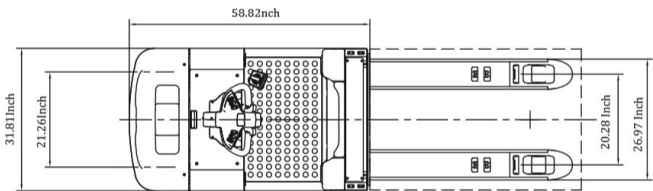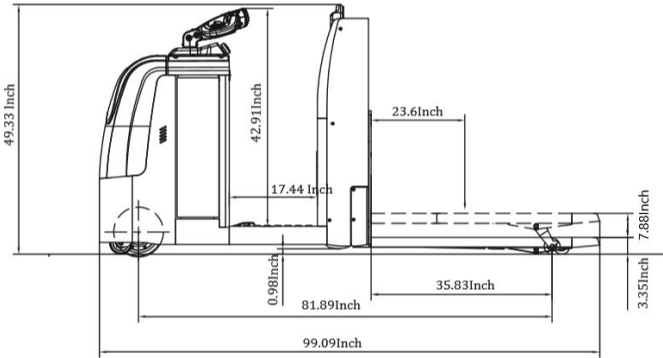

# EKKO A25 Manual Pallet Jack




The EKKO A25 Manual Pallet Jack is designed with quality materials, components, and workmanship. Every product is robotically welded, powder coated and is dependable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5500 lb.
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Polyurethane Wheels
- Ergonomic Handles
- Powder Coated
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

Model		A25
Load Capacity	(lb.)	5500
Lifting height Max.	(in)	7.5
Fork length	(in)	48
Fork width	(in)	27
Fixed leg width, single	(in)	6.3
Overall length	(in)	63"
Overall width max	(in)	27
Lowered fork height	(in)	2.95
Service Weight	(lb.)	160

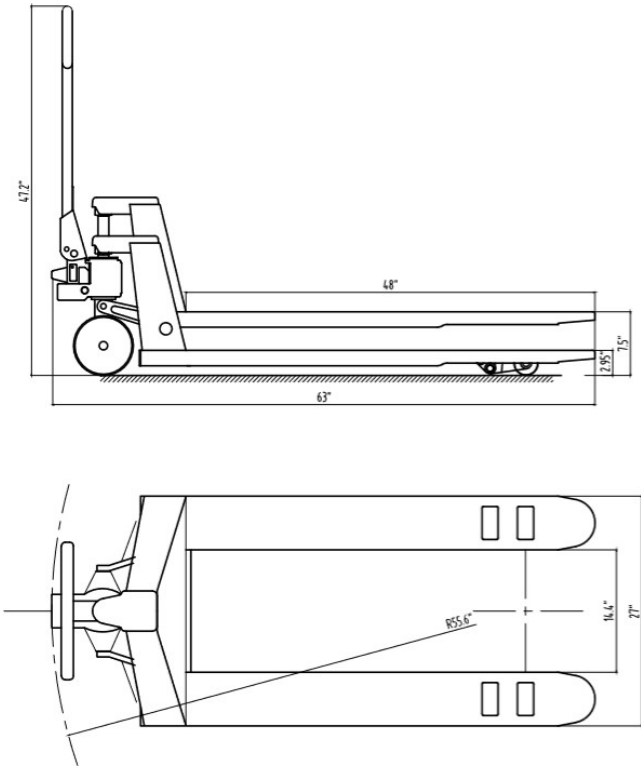

# EKKO A25S Stainless Steel Manual Pallet Jack




The EKKO A25S Stainless Steel Manual Pallet Jack is designed with quality materials and components and workmanship. Every product is robotically welded and is dependable for loading and unloading trucks, loading docks, stockrooms, manufacturing floors and warehousing.

The Specialized Pallet Truck is ideal for sanitary, pharmaceutical, medical, food, and wet environments. Pallet Truck is one hundred percent (100%) type 304 stainless steel for long life in the harshest environments.

Made from high quality stainless steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Stainless Steel
- Load Capacity 5500 lb.
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Nylon Wheels
- Ergonomic Handles
- Steel Construction
- Robotic Welding
- 3 years limited Warranty

Model		A25S
Load Capacity	(lb.)	5500
Lifting height Max.	(in)	7.5
Fork length	(in)	48
Fork width	(in)	27
Fixed leg width, single	(in)	6.3
Overall length	(in)	63"
Overall width max	(in)	27
Lowered fork height	(in)	2.95
Service Weight	(lb.)	155

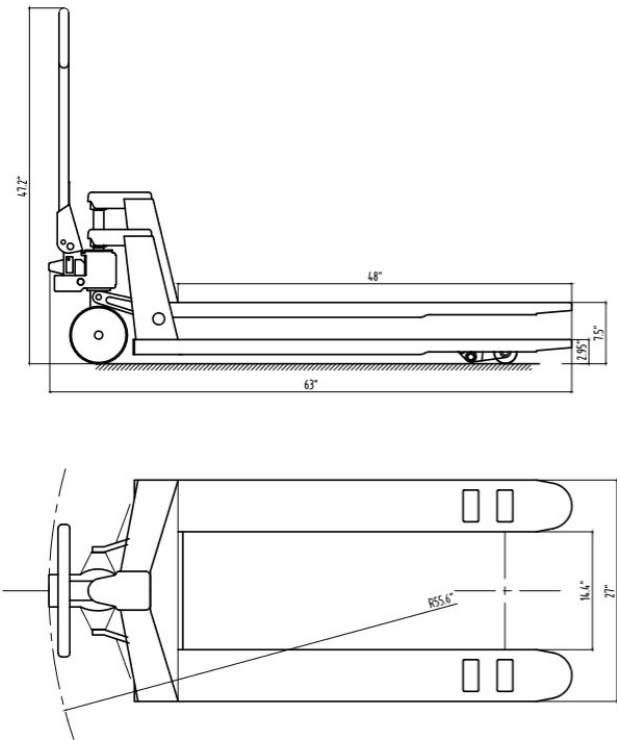



# EKKO A25G Galvanized Steel Manual Pallet Jack




The EKKO A25G Galvanized Steel Manual Pallet Jack is designed with quality materials, components, and workmanship. Every product is robotically welded and is dependable for loading and unloading trucks, loading docks, stockrooms, manufacturing floors and warehousing.

The Specialized Pallet Truck is ideal for sanitary, pharmaceutical, medical, food, and wet environments. Pallet Truck is one hundred percent (100%) type 304 stainless steel for long life in the harshest environments.

Made from high quality stainless steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Galvanized Steel
- Load Capacity 5500 lb.
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Nylon Wheels
- Ergonomic Handles
- Steel Construction
- Robotic Welding
- 3 years limited Warranty

Model		A25W
Load Capacity	(lb.)	5500
Lifting height Max.	(in)	7.5
Fork length	(in)	48
Fork width	(in)	27
Fixed leg width, single	(in)	6.3
Overall length	(in)	63"
Overall width max	(in)	27
Lowered fork height	(in)	2.95
Service Weight	(lb.)	155

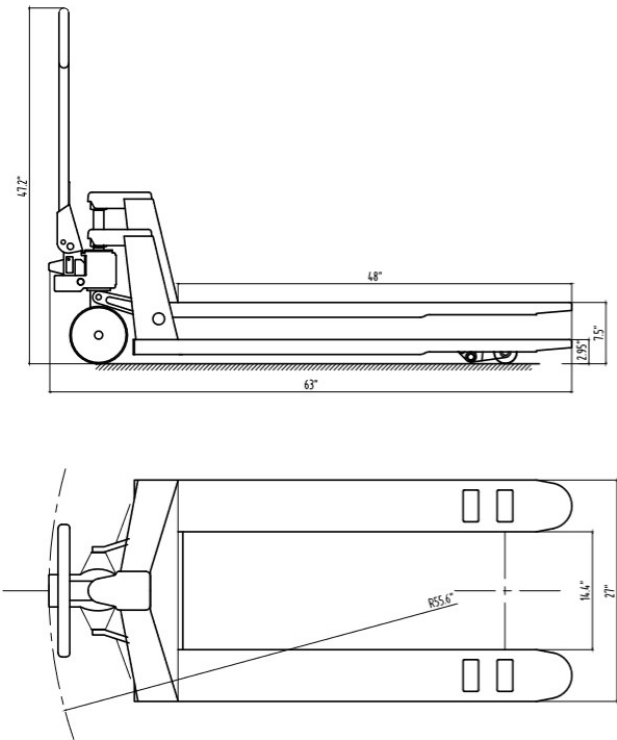

# EKKO A25W Manual Pallet Jack w/Scale


The EKKO A25W Manual Pallet Jack w/Scale is designed with quality materials, components, and workmanship. Every product is robotically welded, powder coated and is dependable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.



- Load Capacity 5500lbs.
- Fork Size 27x45
- Raised Height 7.6"
- Lowered Height 3.1"
- Built-in Scale
- Polyurethane Wheels
- German Seal System
- 3 Lever Handle
- Ergonomic Handles
- Powder Coated
- Steel Construction
- Robotic Welding
- 3 Years Limited Warranty

Model		A25W
Load Capacity	(lb.)	5500
Lifting height Max.	(in)	7.5
Fork length	(in)	48
Fork width	(in)	27
Fixed leg width, single	(in)	6.3
Overall length	(in)	63"
Overall width max	(in)	27
Lowered fork height	(in)	2.95
Service Weight	(lb.)	N/A

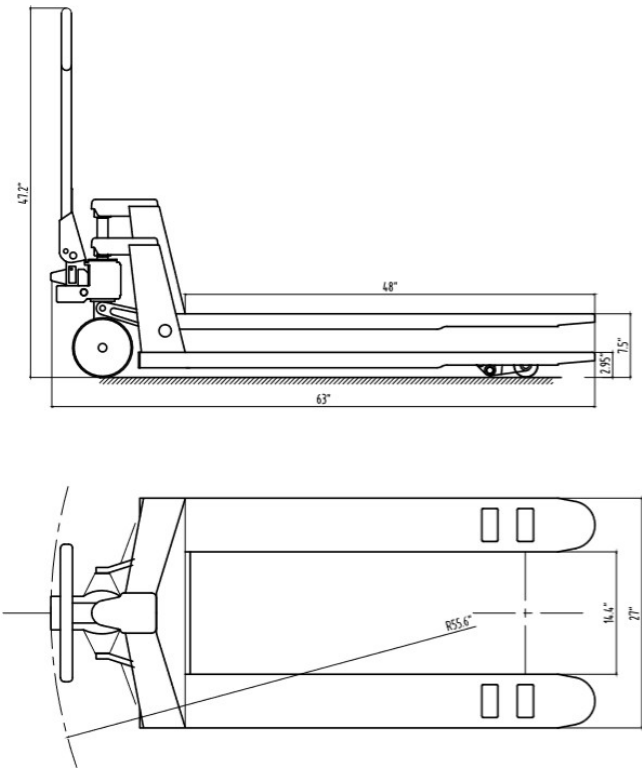

# EKKO A25WL Manual Pallet Jack w/Scale & Printer


The EKKO A25WL Manual Pallet Jack w/Scale & Printer is designed with quality materials, components, and workmanship. Every product is robotically welded, powder coated and is dependable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.



- Load Capacity 5500 lb.
- Built-in Scale and Printer
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Nylon Wheels
- Ergonomic Handles
- Steel Construction
- Robotic Welding
- 3 years limited Warranty

Model		A25WL
Load Capacity	(lb.)	5500
Lifting height Max.	(in)	7.5
Fork length	(in)	48
Fork width	(in)	27
Fixed leg width, single	(in)	6.3
Overall length	(in)	63"
Overall width max	(in)	27
Lowered fork height	(in)	2.95
Service Weight	(lb.)	N/A

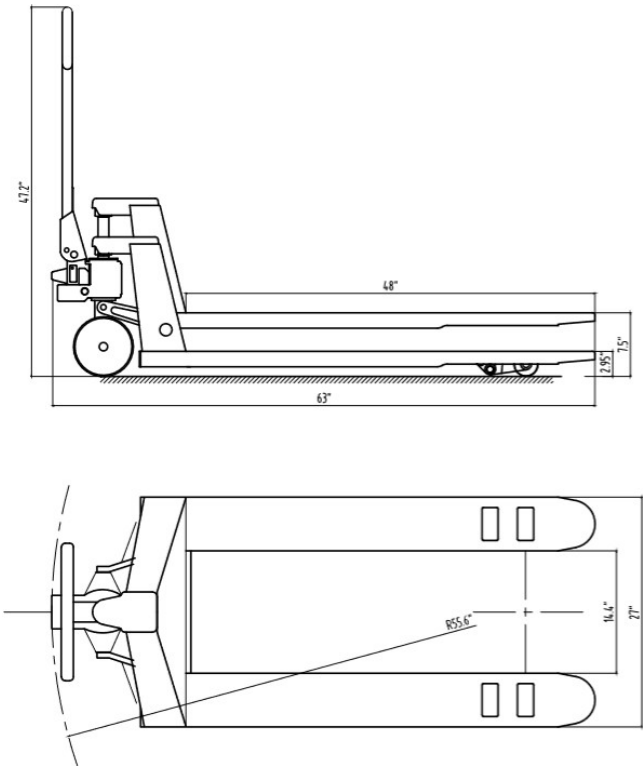

# EKKO T15 Scissor Lift Table Cart

The EKKO T15 Scissor Lift Table Cart is a compact cart to make lifting, transporting loads, order-picking, and moving products with ease. An ergonomic solution to lifting, positioning, and transporting goods.

Our scissor carts are made of heavy-duty steel and constructed to hold up for longevity. Two polyurethane front casters and two rear swivel casters with built-in hand release and foot pump.

- Load Capacity 330 lb.
- Raised Height 28.3"
- Lowered Height 8.3"
- Size Length 27.5" x Width 17.7"
- Polyurethane Casters
- Hand Release
- Foot Brake
- Steel construction
- Robotic Welding
- 3 Years Limited Warranty





Model		T15
Load Capacity	(lb.)	330
Lifting height Max.	(in)	28.3
Length	(in)	27.5
Width	(in)	17.1
Lowest height	(in)	8.3
Handle height	(in)	31.89
Service Weight	(lb.)	88

# EKKO ES40E Scissor Lift Aerial Platform

The EKKO ES40E Scissor Aerial Work Platform is a 506-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards

- Load Capacity 500 lb.
- Raised Height 13.1' (157.5")
- Lowered Height 77"
- Size: Length 50.4" x Width 29.1"
- Steel construction
- 3 Years Limited Warranty

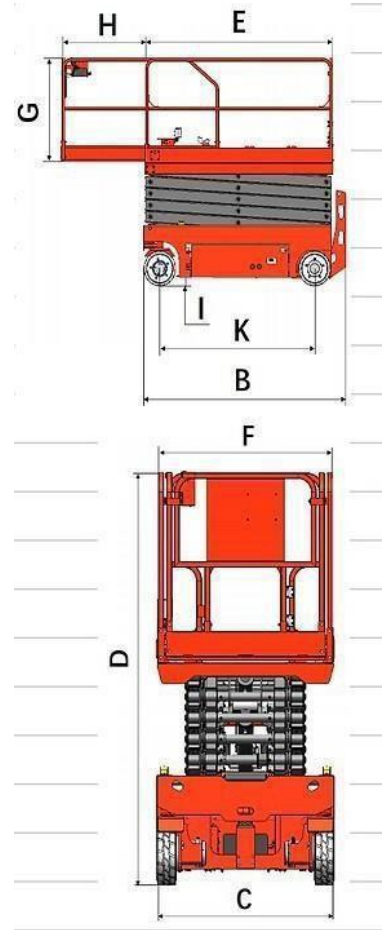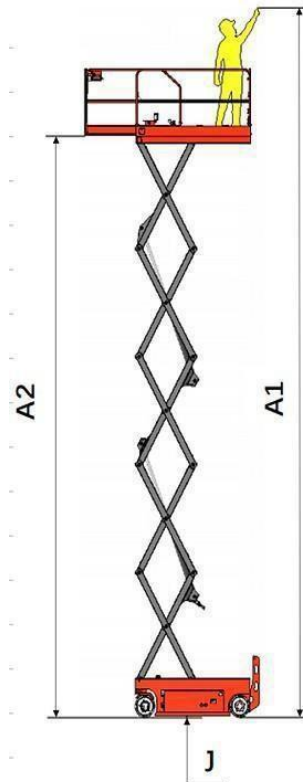



Model		ES40E
Load Capacity	(lb.)	500
Maximum Number of Workers (indoor/outdoor)		2/-
Lifting height Max.	(in)	157.5(13.1')
LengthX Width	(in)	50.4 x 29.1
Platform Extension Size	(in)	23.6
Max Working Height	(in)	236.2(19.6')
Lowered height	(in)	76.8(6.4')
Guardrail height	(in)	43.31
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-4
Rise/fall time	(S)	25/25
Battery	(V/Ah)	12x2V/100Ah
Charger	VAC	100-240
Service Weight	(lb.)	2050



# EKKO ES40E-LI Scissor Lift Aerial Platform

The EKKO ES40E-LI Scissor Aerial Work Platform is a 500-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards

- Load Capacity 500 lb.
- Raised Height 13' (157.5")
- Lowered Height 77"
- Size: Length 50.4" x Width 29.1"
- Steel construction
- 3 Years Limited Warranty

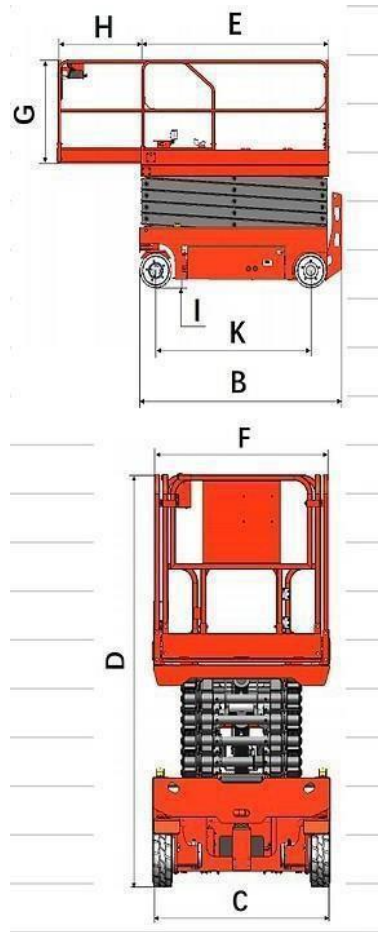
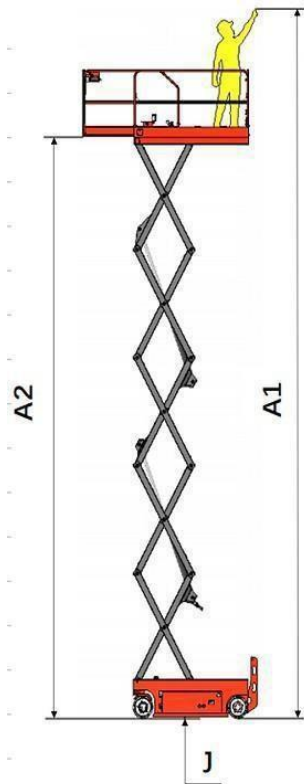


Model		ES40E-LI
Load Capacity	(lb.)	500
Maximum Number of Workers (indoor/outdoor)		2/-
Lifting height Max.	(in)	157.5(13.1')
LengthX Width	(in)	50.4 x 29.1
Platform Extension Size	(in)	23.6
Max Working Height	(in)	236.2(19.6')
Lowered height	(in)	76.8(6.4')
Guardrail height	(in)	43.31
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-4
Rise/fall time	(S)	25/25
Battery	(V/Ah)	12x2V/100Ah
Charger	VAC	100-240
Service Weight	(lb.)	2050

# EKKO ES60E Scissor Lift Aerial Platform

The EKKO ES60E Scissor Aerial Work Platform is a 506-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 500 lb.
- Raised Height 19' (228")
- Lowered Height 86"
- Size: Length 65" x Width 30"
- Steel construction
- 3 Years Limited Warranty

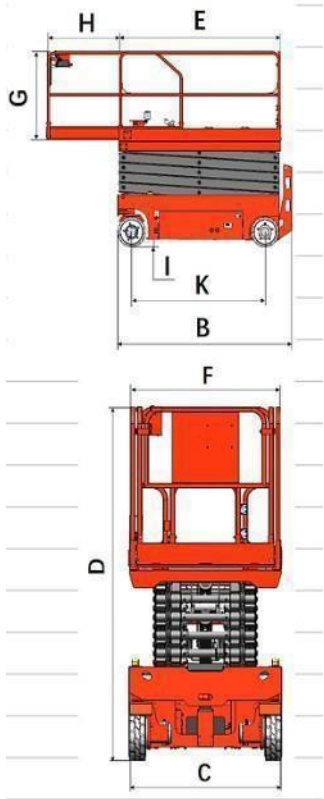
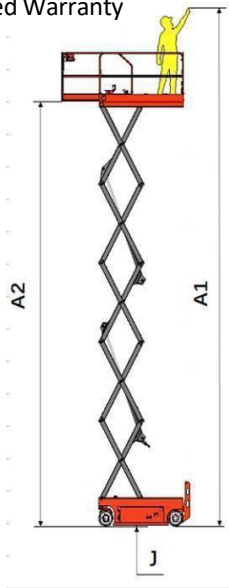


Model		ES60E
Load Capacity	(lb.)	500
Maximum Number of Workers (indoor/outdoor)		2/-
Lifting height Max.	(in)	228" (19')
LengthX Width	(in)	72.44x29.92
Platform Extension Size	(in)	35.43
Max Working Height	(in)	307" (25.6')
Lowered height	(in)	86" (7.2')
Guardrail height	(in)	43.31
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-4
Rise/fall time	(S)	18/28
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	3256

# EKKO ES60E-LI Scissor Lift Aerial Platform

The EKKO ES60E-LI Scissor Aerial Work Platform is a 500-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 500 lb.
- Raised Height 19' (228")
- Lowered Height 86"
- Size: Length 65" x Width 30"
- Steel construction
- 3 Years Limited Warranty

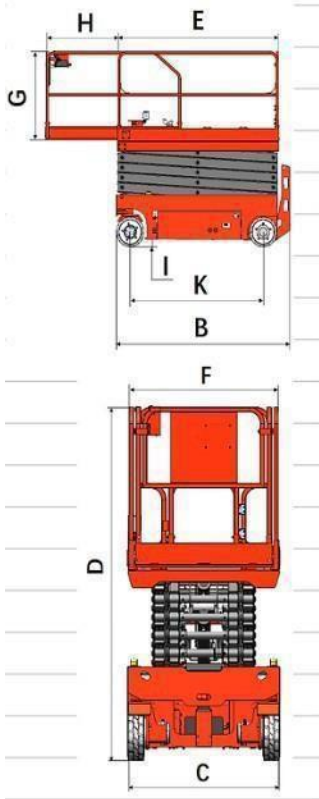
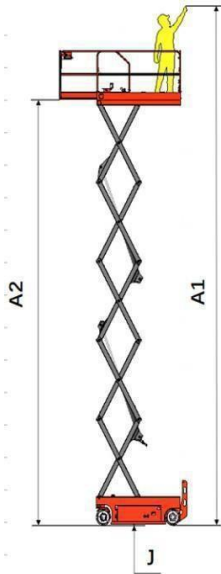


Model		ES60E-LI
Load Capacity	(lb.)	500
Maximum Number of Workers (indoor/outdoor)		2/-
Lifting height Max.	(in)	228" (19')
LengthX Width	(in)	72.44x29.92
Platform Extension Size	(in)	35.43
Max Working Height	(in)	307" (25.6')
Lowered height	(in)	86" (7.2')
Guardrail height	(in)	43.31
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-4
Rise/fall time	(S)	18/28
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	3256

# EKKO ES80E Scissor Lift Aerial Platform

The EKKO ES80E-LI Scissor Aerial Work Platform is a 500-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 990 lb.
- Raised Height 26.2' (315")
- Lowered Height 90.6"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

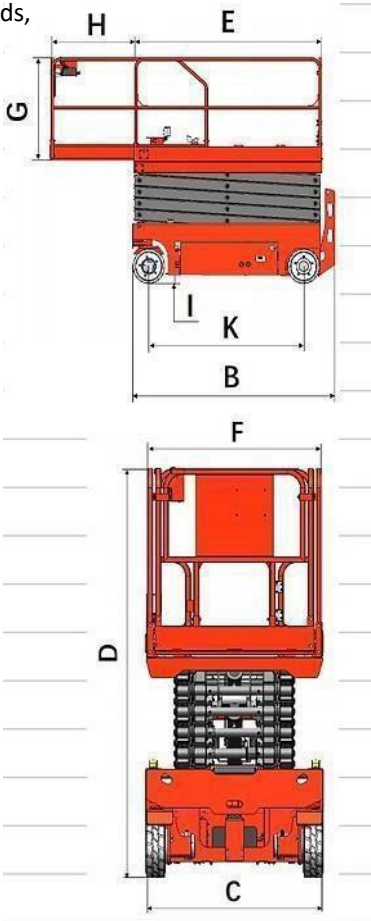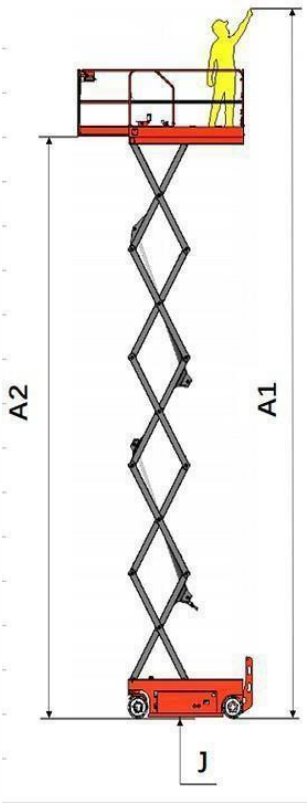


Model		ES80E
Load Capacity	(lb.)	990
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	315" (26.2')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	394" (32.8')
Lowered height	(in)	90.6" (7.5')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	32/35
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240



# EKKO ES80E-LI Scissor Lift Aerial Platform

The EKKO ES80E-LI Scissor Aerial Work Platform is a 990-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 990 lb.
- Raised Height 26.2' (315")
- Lowered Height 90.6"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

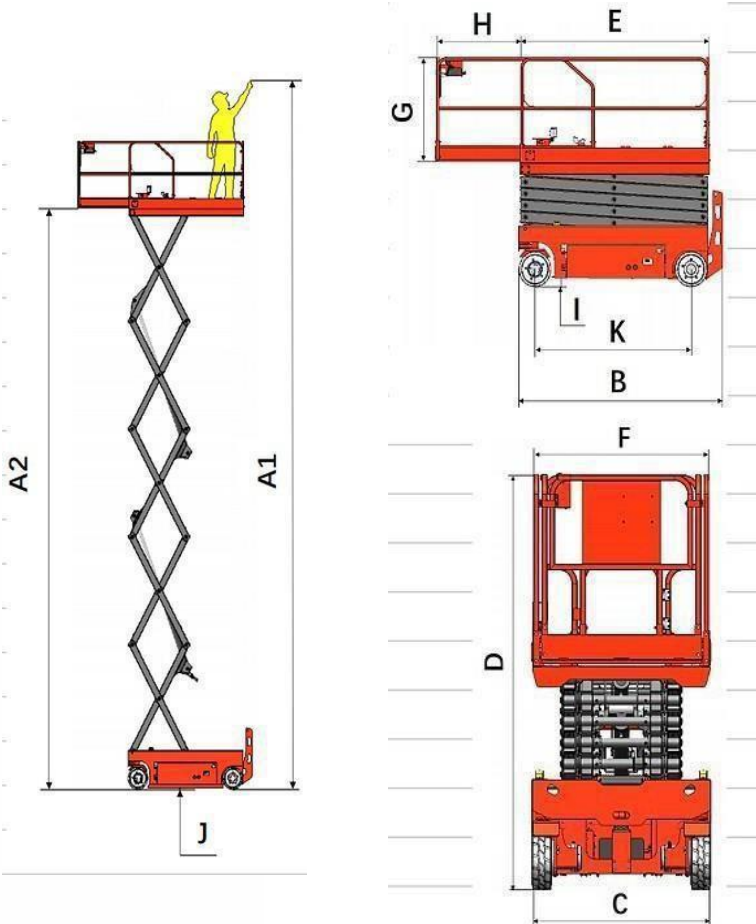



Model		ES80E-LI
Load Capacity	(lb.)	990
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	315" (26.2')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	394" (32.8')
Lowered height	(in)	90.6" (7.5')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	32/35
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	5412



# EKKO ES100E Scissor Lift Aerial Platform

The EKKO ES100E Scissor Aerial Work Platform is a 700-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 700 lb.
- Raised Height 32.8' (394")
- Lowered Height 96.85"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

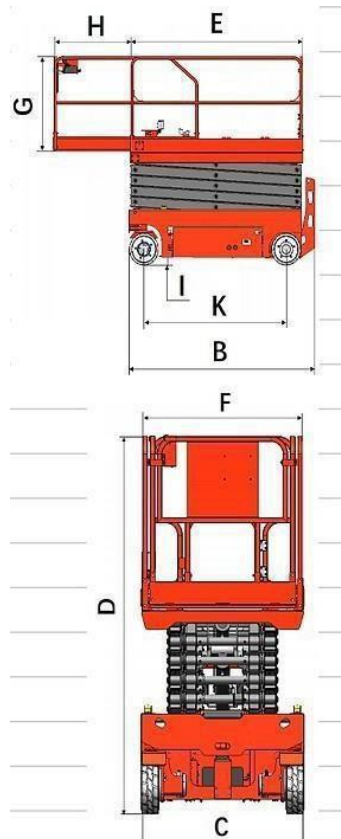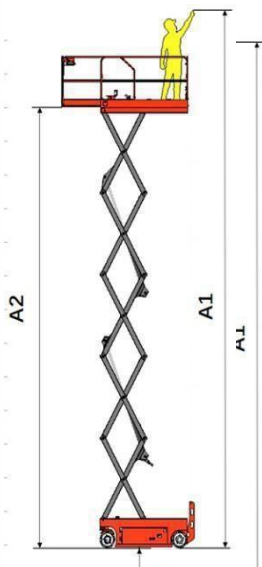



Model		ES100E
Load Capacity	(lb.)	700
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	394" (32.9')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	472" (39.3')
Lowered height	(in)	96.85" (8')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	52/48
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	6204

# EKKO ES100E-LI Scissor Lift Aerial Platform



The EKKO ES100E-LI Scissor Aerial Work Platform is a 700-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 700 lb.
- Raised Height 32.8' (394")
- Lowered Height 96.85"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

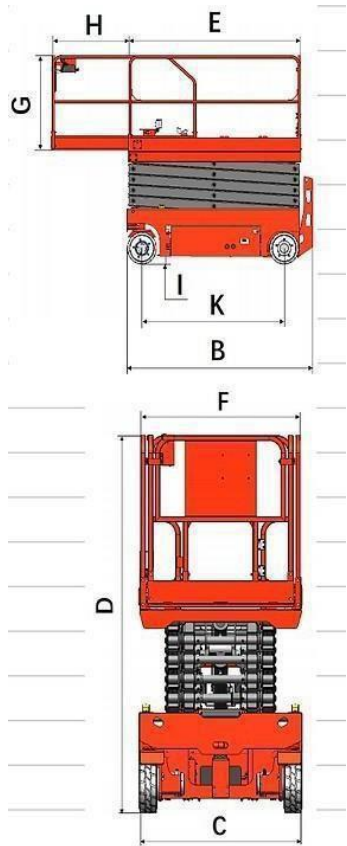
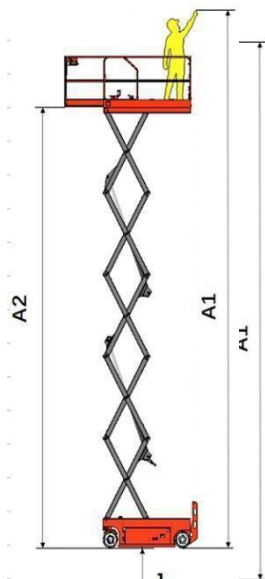


Model		ES100E-LI
Load Capacity	(lb.)	700
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	394" (32.9')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	472" (39.3')
Lowered height	(in)	96.85" (8')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	52/48
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	6204

# EKKO ES120E Scissor Lift Aerial Platform

The EKKO ES120E Scissor Aerial Work Platform is a 700-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.

- Load Capacity 700 lb.
- Raised Height 39' (468")
- Lowered Height 102.36"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

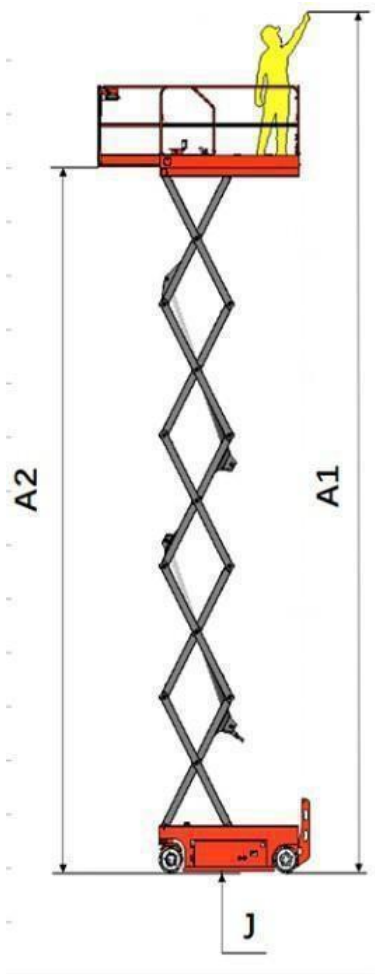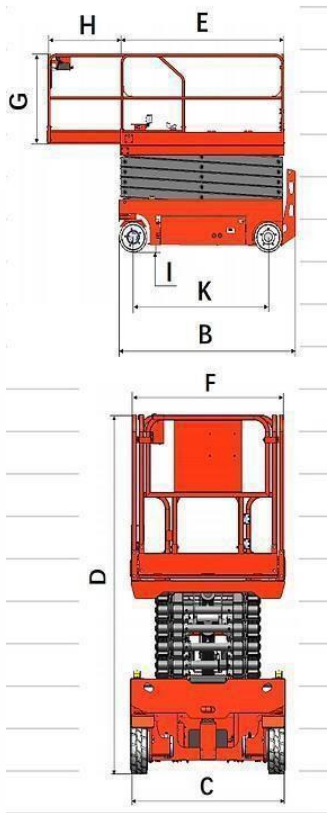



Model		ES120E
Load Capacity	(lb.)	700
Maximum Number of Workers (indoor/outdoor)		2/-
Lifting height Max.	(in)	468" (39')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	547" (45.6')
Lowered height	(in)	102.36" (8.5')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	52/52
Battery	(V/Ah)	6x4V/240Ah
Charger	VAC	100-240
Service Weight	(lb.)	6490

# EKKO ES120E-LI Scissor Lift Aerial Platform



The EKKO ES120E-LI Scissor Aerial Work Platform is a 700-lb capacity compact platform with four wheels and Curtis controller which allows you to make lifting, transporting loads, and moving products easily and safely. This product also complies with GB25849 and EN280 standards.



- Load Capacity 700 lb.
- Raised Height 32.8' (394")
- Lowered Height 96.85"
- Size: Length 89" x Width 45"
- Steel construction
- 3 Years Limited Warranty

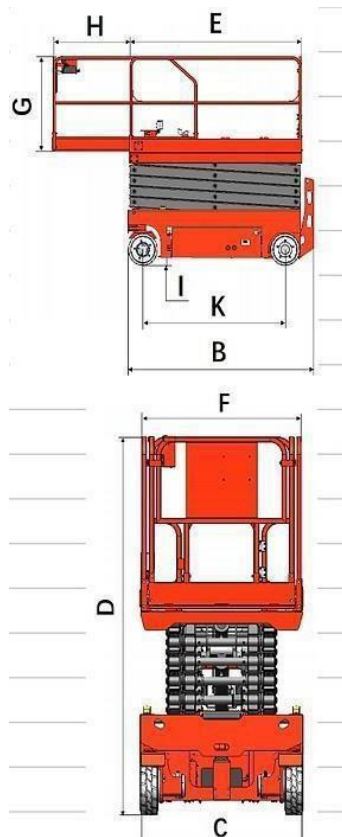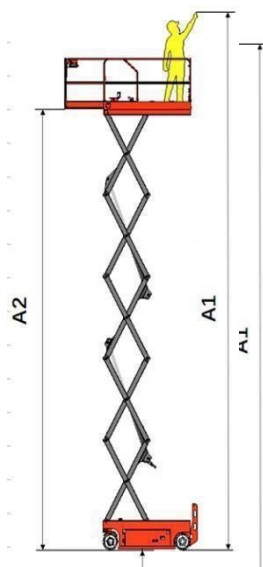

Model		ES120E-LI
Load Capacity	(lb.)	700
Maximum Number of Workers (indoor/outdoor)		2/1
Lifting height Max.	(in)	394" (32.9')
Length/Width	(in)	94.5/45.27
Platform Extension Size	(in)	39.37
Max Working Height	(in)	472" (39.3')
Lowered height	(in)	96.85" (8')
Guardrail height	(in)	43.3
Driving Speed (Lifted state/lowered state)	(km/h)	0-0.8/0-3.2
Rise/fall time	(S)	52/48
Battery	(V/Ah)	6x4V/180Ah
Charger	VAC	100-240
Service Weight	(lb.)	6204



# EKKO EG30 Tow Tractor

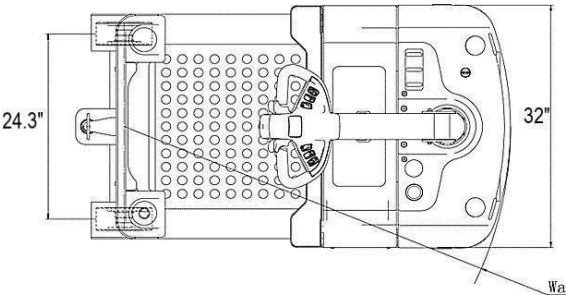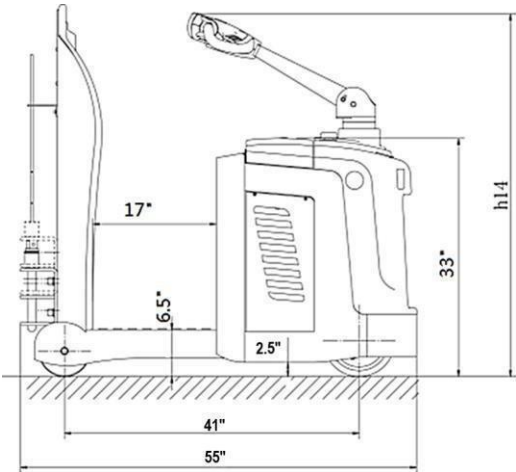

The EKKO EG30 Tow Tractor is designed for tugging and pulling applications made with quality materials, components, and workmanship. Every product is robotically welded, powder coated and is dependable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components to withstand any terrain, usage, impact, and directional changes for the use of any application with confidence and assurance.

- Tow Capacity 10,000 lb.
- Curtis Instrument Controller
- AC Drive 1.3
- Standing Drive
- Polyurethane Wheels
- EPS (Electronic Power Steering)
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 24V/210Ah
- 3 Year Limited Warranty

Model		EG30
Power unit		Electric
Operation		Standing
Tow Weight	(lb.)	10,000
Overall length	(in)	55
Overall width	(in)	32
Overall Height	(in)	53
Turning radius	(in)	49
Maxgradient performance laden/unladen	(%)	3/15
AC Drive motor	(W)	1300W
Battery voltage/rated capacity	(V/Ah)	24V/210Ah
AC Drive Motor		ACMotor speed control
Noise level at operator sear	(dB(A))	68
Service weight (w/ battery)	(lb.)	1445



# **EKKO**®

## **MATERIAL HANDLING EQUIPMENT**



**EKKO Material Handling Equipment Mfg. Inc.**

**1761 W. Holt Ave.**

**Pomona, CA.**

**91768**

**T: (877) 232-6517**

**O: (909) 222-6529**

**F: (909) 222-6861**

**info@ekkolifts.com**

**www.ekkolifts.com**