

## SEMI ELECTRIC STRADDLE STACKER

EA15A / EA15A-138




## Semi Electric Staddle Stacker EA15A / EA15A-138



| Model  | EA15A    |                            |  |  |
|--|----------|----------------------------|--|--|
| Power  | ELECTRIC |                            |  |  |
| Operation Type                               |          | Walk-behind                |  |  |
| Rated Lifting Weight / Rated Load            | Q(lbs.)  | 3300                       |  |  |
| Load Center Distance                         | c(in)    | 20                         |  |  |
| Wheelbase                                    | y(in)    | 53                         |  |  |
| Tire Type, Drive Wheel / Load Wheel          |          | NYLON                      |  |  |
| Drive Wheel Size (Diameter x Width)          | in       | Ф7×2                       |  |  |
| Load Wheel Size (Diameter x Width)           | in       | Ф3.15×2.75                 |  |  |
| Number of Wheels, x = Drive Wheel            |          | 2-Feb                      |  |  |
| Height When Mast is Retracted                | h1(in)   | 85 / 95                    |  |  |
| Lift Height                                  | h3(in)   | 118 / 138                  |  |  |
| Maximum Height When Mast is Extended         | h4(in)   | 147 / 167                  |  |  |
| Minimum Fork Height                          | h13(in)  | 2.6                        |  |  |
| Overall Length                               | 11(in)   | 70 (62 w/ forks folded up) |  |  |
| Inner Width of Support Legs                  | in       | 35~51                      |  |  |
| Fork Dimensions                              | s/e/l    | 1.4×4×45                   |  |  |
| Fork Adjustment Width (Outer Width)          | b5(in)   | 8.66~32                    |  |  |
| Minimum Ground Clearance at Wheelbase Center | m2(in)   | 2.7                        |  |  |
| Minimum Turning Radius                       | Wa(in)   | 59                         |  |  |
| Lifting Speed, Full Load/No Load             | in/s     | 3.3/4.3                    |  |  |
| Lifting Motor Power                          | kw       | 2.2                        |  |  |
| Battery Voltage/Rated Capacity               | (V)/(Ah) | Lead-acid battery12/120    |  |  |
| Charger                                      | (V)/(A)  | 12/15A                     |  |  |
| Steering Type                                |          | Mechanical steering        |  |  |
| Noise Level at Operator's Ear                | dB(A)    | <70                        |  |  |

## Semi Electric Staddle Stacker EA15A / EA15A-138



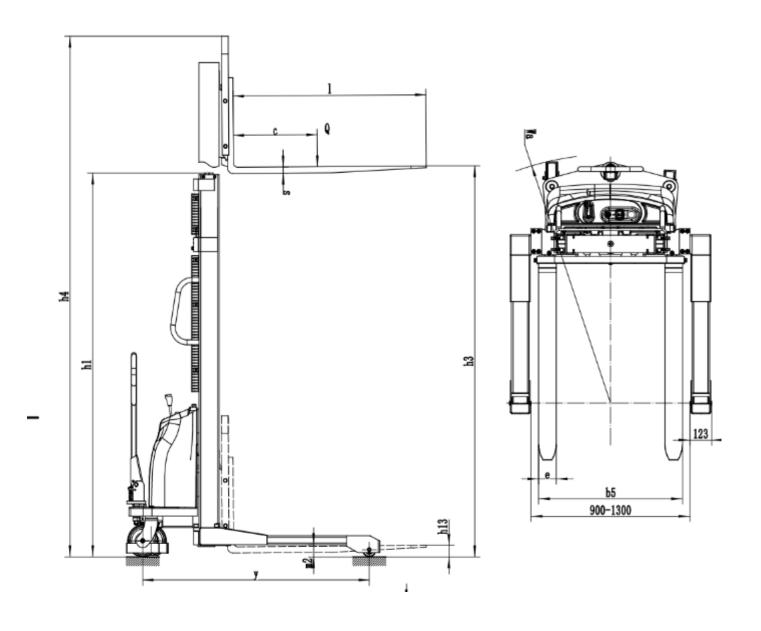

| MODEL#    | MAST | LIFT HEIGHT | MAX MAST HEIGHT | SERVICE WEIGHT |
|-----------|------|-------------|-----------------|----------------|
| EA15A     | 85"  | 118"        | 147"            | 1212 Lbs.      |
| EA15A-138 | 95"  | 138"        | 167"            | 1234 Lbs.      |



1761 W. Holt Ave.

Pomona, CA 91768 USA

T: (877) 232-6517 F: (909) 222-6861

AUTHORIZED DEALERS ONLY www.ekkolifts.com