

Lithium Powered 3-Wheel Forklift

EK18AC-189LI / EK18AC-216LI



- Capacity: 4,000 lbs.
- Lift Height: 189" | 216"
- 3-Wheel Configuration
- Compact Turning Radius
- 3-Stage Full Free-Lift Mast
- Side-Shift & Fork Positioner
- Mast Tilt
- High-Power Front-Wheel Drive
- 48V / 150Ah Lithium-Ion Battery
- 480V 3-Phase Charger Standard
- Available Options (additional cost):
 - 220V 3-phase | 110V Single phase
- 3 Year Limited Warranty

EK18AC-189LI / EK18AC-216LI


SPECIFICATIONS



Model		EK18AC-189LI EK18AC-216LI
Power Type		Electric
Operating Mode		Ride on
Rated Load Capacity	lbs.	4,000
Load Center Distance	In	24
Wheelbase	In	50.2
Tire Type, Drive Wheel/Load Wheel		Pneumatic Tires
Lift Height	in	189 216
Free Lift	in	59.1
Mast Tilt	°	3/6
Overall Length	In	112.6
Overall Width	In	42.1
Mast Height (Forks Lowered)	In	85.8 93.7
Turning Radius	In.	63.8
Travel Speed	Mph	59/6.2
Lift Speed	In./s	8.7/9.3
Drive Motor	kW	4.5AC
Lithium Battery	V/Ah	48V/150Ah
Service Weight	Lbs.	6,283 6,349

Lithium 3-Wheel Forklift

EK18AC-189LI / EK18AC-216LI

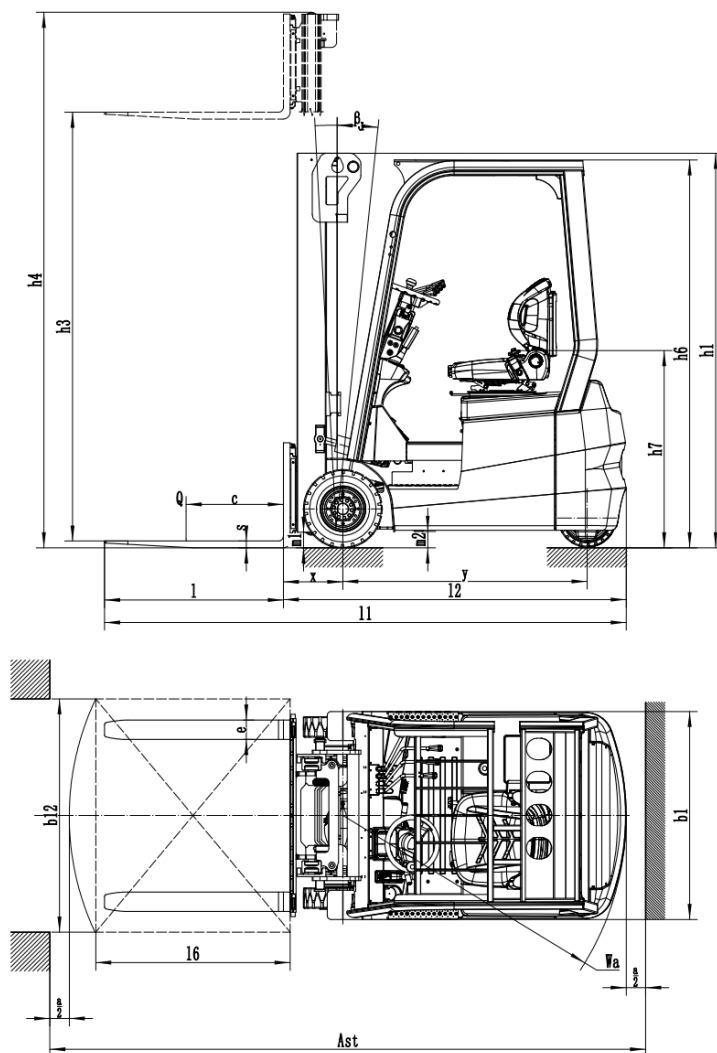

MODEL #	MAST	LIFT HEIGHT	MAX MAST HEIGHT	SERVICE WEIGHT
EK18AC-189LI	85.8"	189"	209.4"	6283 lbs.
EK18AC-216LI	93.7"	216"	237"	6349 lbs.